

# Homework #5

MEMS 0051 - Introduction to Thermodynamics

Assigned February 16<sup>th</sup>, 2019  
Due: February 22<sup>nd</sup>, 2019

## Problem #1

A gasoline engine produces 15 hp using 40 kW of heat transfer from burning fuel. What is its thermal efficiency, and how much power is rejected to the ambient surroundings

## Problem #2

A window air-conditioner unit is placed on a laboratory bench and tested in cooling mode using 750 [W] of electric power with a COP of 1.75. What is the cooling power capacity, and what is the net effect on the laboratory?

## Problem #3

For each of the following devices, draw a schematic that labels and quantifies all of the energy flows ( $\dot{W}, \dot{Q}_H, \dot{Q}_L$ ) between two thermal reservoirs ( $T_H, T_L$ ). Then calculate the correct metric of performance ( $\eta, \beta$ , or  $\beta'$ ) for each device.

- A heat engine that converts 800 [kW] of heat into 250 [kW] of power.
- A refrigerator with a power input of 300 [kW] that rejects 1000 [kW] of heat to the environment.
- A heat pump that takes in 500 [kW] of heat and outputs 700 [kW] of heat.

## Problem #4

Consider a heat engine and heat pump connected as shown in Fig. 1. Assume  $T_{H1} = T_{H2} > T_{amb}$ . For each case, determine if the setup satisfies the first law and/or violates the second law. (*Note:* Be sure to indicate which postulate(s), if applicable, are violated by the second law)


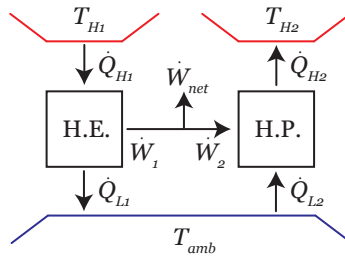


Figure 1: Schematic for Problem #4.

	$\dot{Q}_{H1}$	$\dot{Q}_{L1}$	$\dot{W}_1$	$\dot{Q}_{H2}$	$\dot{Q}_{L2}$	$\dot{W}_2$
Case 1	6	4	2	3	2	1
Case 2	6	4	2	5	4	1
Case 3	3	2	1	4	3	1

## Problem #5

Consider the refrigeration cycle shown below, where a refrigerant cycles through a compressor, an evaporator, an expansion valve, and a condenser. The compressor requires an electrical input, the evaporator removes heat from the inside of the refrigerator, and the condenser rejects heat to the air in the room.

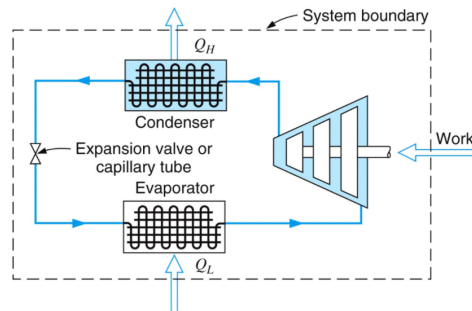

- What are some sources of irreversibility in this cycle? List at least two.
- What are some modifications you could make to this system to make it more reversible? Describe at least two modifications.