

# K-Meter

Free implementation of a K-System meter  
according to Bob Katz' specifications



© 2010-2014 [Martin Zuther](#)

*Last edited on 27th July 2014*

# Contents

<b>1</b>	<b>The loudness race</b>	<b>4</b>
<b>2</b>	<b>The K-System</b>	<b>5</b>
<b>3</b>	<b>Installation</b>	<b>7</b>
3.1	Windows . . . . .	7
<b>4</b>	<b>Controls</b>	<b>8</b>
4.1	Meter selection . . . . .	8
4.2	Averaging method . . . . .	9
4.3	Infinite peak hold . . . . .	9
4.4	Show peak level meter . . . . .	10
4.5	Magnify meters . . . . .	10
4.6	Mono mode . . . . .	11
4.7	Reset button . . . . .	11
4.8	Validation button . . . . .	11
4.9	About button . . . . .	12
4.10	Display license . . . . .	12
<b>5</b>	<b>Meters</b>	<b>14</b>
5.1	K-System meter . . . . .	14
5.2	Average level meter . . . . .	15
5.3	Peak level meter . . . . .	16

## *Contents*

---

5.4	Overload counter . . . . .	16
5.5	Maximum peak display . . . . .	17
5.6	Phase correlation meter . . . . .	17
5.7	Stereo meter . . . . .	18
<b>6</b>	<b>Validation</b>	<b>19</b>
6.1	Validation status . . . . .	20
6.2	Frequency and phase response . . . . .	21
<b>7</b>	<b>Help needed</b>	<b>25</b>
<b>8</b>	<b>Final words</b>	<b>26</b>
<b>A</b>	<b>How to build K-Meter</b>	<b>28</b>
A.1	Preparing GNU/Linux . . . . .	28
A.2	Dependencies . . . . .	30
A.2.1	premake4 . . . . .	30
A.2.2	JUCE library . . . . .	31
A.2.3	Virtual Studio Technology SDK . . . . .	31
A.2.4	Audio Streaming Input Output SDK . . . . .	32
A.2.5	Fastest Fourier Transform in the West . . . . .	32
A.2.6	Python . . . . .	33
A.2.7	Artistic Style . . . . .	34
A.3	Building on GNU/Linux . . . . .	35
A.4	Building on Microsoft Windows . . . . .	35
<b>B</b>	<b>GNU General Public License</b>	<b>36</b>

# 1 The loudness race

When comparing two similar pieces of music, the louder one is perceived as sounding better (although this is only true for very short periods of time). Accordingly, the loudness of music productions has continuously grown during the last decades.

As maximum levels of records, tapes and digital media have a natural limit, however, mastering engineers have started using sophisticated dynamic compression techniques to achieve higher loudness without distorting the music (as of 2010, distortion is increasingly being used in order to achieve even higher loudness).

Unfortunately, this decrease in dynamic range does not leave the music unharmed. Current compressed music blasts away your ears and makes you turn down the volume of your amplifier. Having lowered the volume, you'll find that the "better-sounding" compressed music suddenly sounds pretty dull and boring compared to uncompressed music. In contrast, music with high dynamic range makes you turn up the volume – heck, it even sounds better when being broadcast on the radio!

## 2 The K-System

The K-System has been devised by mastering engineer Bob Katz in order to counteract the ongoing loudness race and to help adjusting the levels of different songs during mastering. K-System meters are level meters that do **not** place the 0 dB mark on top of the meter. Instead, 0 dB on K-System meters relates to a reference loudness. There are three K-System scales:

- K-20 (0 dB at –20 dB FS, recommended)
- K-14 (0 dB at –14 dB FS)
- K-12 (0 dB at –12 dB FS)

Using the K-System is easy. Just calibrate your monitor system so that pink noise (–20 dB FS RMS, 20 Hz to 20 kHz; [chapter 6](#) will tell you where to find a suitable audio file) on one channel yields 83 dB SPL on a loudness meter placed at your listening position and set to *C-weighted, slow*. Then mark the monitor’s gain position as “K-20”.

When your mixes or masters seem to have just the right loudness, they should now yield 0 dB on a K-20 meter.

In case you want to use the K-14 meter, attenuate the monitor gain by 6 dB or repeat the above process so that pink

noise yields 77 dB SPL. For K-12, attenuate the monitor gain by another 2 dB (pink noise should yield 75 dB SPL).

For more information about the K-System, please see [Bob's website](#) or his great book “Mastering Audio – The Art and the Science”.

## 3 Installation

In order to use the pre-compiled binaries, simply extract the **traKmeter** files from the downloaded archive. For the plug-ins, you'll then have to move the extracted files to your respective plug-in folder (`~/lv2`, `~/vst`, `C:\Program Files\Steinberg\VstPlugins\` or the like).

Loading K-Meter may take a few seconds: it checks your computer's capabilities on start-up so that FFT calculations will run at maximum speed. Depending on your computer, this little wait in the beginning may well result in lower resource usage later.

### 3.1 Windows

If you move the pre-compiled binaries to another directory, please make sure to also move the file `libfftw3f-3.dll` (or `libfftw3f-3_x64.dll`) to this directory. Otherwise, you will not be able to use K-Meter.


# 4 Controls

## 4.1 Meter selection

You can select the different K-System meter scales (**K-20**, **K-14** and **K-12**) by clicking on these radio buttons. In the rare case that you want to use the meter in a mixer's channel strip, click the **Normal** button which will place 0 dB FS on top of the meter's scale.



With its *two* green areas, the **Normal** meter also looks a little different. It has been designed for gain staging during recording: average levels should stay in the lower green area (centred to **-20 dB FS**), while peak levels should not exceed the upper yellow bar (**-9 dB FS**). However, you may find my latency-free plug-in [traKmeter](#) better suited for gain staging.




*Please note that the **Normal** state will be neither saved, nor recalled in your DAW and the standalone version. This is by design – the K-System meter has been explicitly designed to **not** have 0 dB FS on top!*



## 4.2 Averaging method

The average level meters can either read unweighted levels (**RMS**) or loudness-weighted levels according to [ITU-R BS.1770-1](#) (**ITU-R**). Click on the corresponding radio button to make your selection.



According to Bob Katz, the unweighted **RMS** method has been designed for stereophonic metering and calibration, while the loudness-weighted **ITU-R** method should be used for channel-summed loudness metering. To reference a meter, state both K-System meter scale and averaging method, separated by a slash, such as “K-20/ITU”.

*Note: K-Meter fully implements Annex 1 of the now superseded ITU-R BS.1770-1 standard ('K' frequency weighting, mean square calculation and channel-weighted summation), whereas the gated loudness measurement specified in ITU-R BS.1770-2 is not (and will not be) supported.*

## 4.3 Infinite peak hold

Click on this button to toggle between infinite peak hold and “falling peaks”. This setting applies to both average and peak meters.



## 4.4 Show peak level meter

Click on this button to toggle display of the peak level meters. The original K-System meter specification demands peak level meters, but Bob Katz has asked me to hide them by default:



*“Too many people will try to normalize the peak to full scale if they see a peak meter, and that’s what we want to avoid. You can still make a K-System meter like the original, but if we meet again in 15 years I hope that peak metering will be outlawed.”*

## 4.5 Magnify meters

This button magnifies both average and peak level meters to 0.1 dB steps. If switched on, the 0 dB mark is placed near the centre.



*Hint: by selecting different meter scales, you can easily magnify the whole range between  $-25\text{ dBFS}$  and  $0\text{ dBFS}$ .*

## 4.6 Mono mode

Click this button to easily check the mono compatibility of your stereo mix or master. In **mono** mode, audio channels will be down-mixed to mono and the meters will be linked.



In case you insert the plug-in into a mono channel strip, **mono** mode will be selected and cannot be toggled.

## 4.7 Reset button

Click on this button to reset all meters, peaks and counters. You can also use it to get rid of graphical artifacts, because all meters will be redrawn as well.



## 4.8 Validation button

Click on this button to open the **validation window** (see [chapter 6](#)) which allows you to play an audio file (WAV, AIFF or FLAC) through K-Meter and dump internal data. During validation, the button will light up and clicking it will stop validation early.



*Unfortunately, the underlying JUCE library does not seem to support multi-channel audio files. You may load such audio*

*files into your DAW of choice and insert **K-meter** as a plug-in instance.*

On Linux, dumped data will be written to `stderr`, so just start the K-Meter standalone or your VST host from the shell and watch the output coming. On other systems, have a look at your VST host's log files (I have successfully used Ableton Live for this). If that doesn't work, you might have to start either the K-Meter standalone or your VST host from a debugger.

As a side note, **SMA(50)** designates the simple moving average of 50 values, a neat way to emphasise trends and eliminate short-term fluctuations.

## 4.9 About button

Clicking on this button will open the **about window** where you will be informed about version number, contributors, copyright and the GNU General Public License.



## 4.10 Display license

This button is located in the **about window** and does not only advertise that you are using free



software licensed under the **GNU General Public License** – when clicked, it will also open the license's website in your web browser ...


# 5 Meters

For 5.1 surround sound, K-Meter assumes a channel order of *L*, *R*, *C*, *LFE*, *Ls* and *Rs*. Please double-check whether this matches your host's channel order.

## 5.1 K-System meter

The K-System meter consists of an average level meter (graphic on the right, contiguous lit segments) and an optional peak level meter (single lit segment on top). The recommended K-20 meter has 20 dB of headroom above 0 dB, while the K-14 and K-12 meters have 14 dB and 12 dB of headroom, respectively.

Each level meter is divided into segments of 1 dB, with the exception of the top 2 dB (segments of 0.5 dB) and the bottom end (segments of 10 dB). Magnified level meters are divided into segments of 0.1 dB.

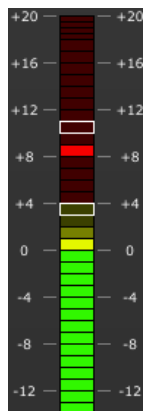

*Note: In ITU-R mode, the average level meter is graded in LK which stands for Loudness, K weighted and is by all means equivalent to dB.*

Recent maximum levels are displayed by white rectangles around the corresponding meter segments. Unless “Infinite peak hold” is switched on, maximum levels are held for 10 s and then start falling with a fall time of 8.67 dB/s.

Both stand-alone application and the plug-in only work at sampling rates between 44.1 kHz and 192 kHz and introduce a latency of 1024 samples. This latency is reported to your plug-in host so it may compensate for the introduced delay. Needless to say, the original unfiltered signal is passed to the outputs.

You can reset all meters by clicking on the “Reset” button.

## 5.2 Average level meter

The average level meter uses an averaging period of 1024 samples. In **RMS** mode, this meter exhibits a flat frequency response between 20 Hz and 20 kHz ( $\pm 0.01$  dB), whereas **ITU-R** mode implements ‘K’ frequency weighting and also sums all channels as specified in [ITU-R BS.1770-1](#).

In all modes, the average level meter is band-limited using a windowed-sinc low-pass filter with a cutoff frequency of 21.0 kHz. On level changes, it takes 600 ms for the meter to reach 99 % of the final reading.

*Note: Unfortunately, the specifications of ITU-R BS.1770-1 clash with those for K-System meters. I have discussed this in depth with Bob Katz and we decided that it makes more sense to adhere to ITU-R BS.1770-1 in these cases.*

*Thus, in ITU-R mode sine waves do not read the same on average and peak level meters. Moreover, pink noise ( $-20$  dB FS RMS, 20 Hz to 20 kHz) does not read 0 dB on the K-20 average level meter. So for calibration, please switch K-Meter to RMS mode.*

### 5.3 Peak level meter

The peak level meter displays the unfiltered peak level and thus possesses a completely flat frequency response. It has a rise time of one sample and a fall time of 8.67 dB/s.

### 5.4 Overload counter

The overload counter displays the number of samples that have reached or exceeded digital full scale (to be exact, the counter registers levels above  $-0.001$  dB FS to address the granularity of 16-bit floating-point numbers). This is a very conservative approach to estimate overloads – but I’d rather have an excess warning than have my audio files clip.





*Please note that this counter does not register inter-sample peaks.*

## 5.5 Maximum peak display

This meter displays the maximum peak level encountered so far in dB. In case the level exceeds  $-0.2$  dB FS, the meter will turn red.



*Please note that this display does not register inter-sample peaks.*

## 5.6 Phase correlation meter

This meter only works for stereo channels and displays the cross correlation between left and right channel. Cross correlation is a measure of how much two signals are correlated. Thus, a value of  $+1$  means that both channels are *in phase*, whereas a value of  $-1$  signals that the channels are completely *out of phase*. Please note that the meter's scale is not linear!



For the non-tech savvy musician: if you find that this meter hits the red area, you should check the mono-compatibility of your mix. But although phase correlation meters often prove helpful, you cannot always rely on their readout.

The only way to make sure that your mixes are mono-compatible is to actually listen to them in mono.

That's a universal truth, by the way. Do not mix by your eyes, mix by your ears!

## 5.7 Stereo meter

The stereo meter obviously only works for stereo channels and displays the average stereo position of your mix. It may indicate a bias to one stereo channel that you might have overheard due to impaired hearing, wrong placement of your monitors or similar problems.




But please don't get the false notion that the needle should stay in the middle all the time in order to achieve a good mix. Quite the contrary! As I said, you should not mix by your eyes ...

## 6 Validation

I have gone to great lengths to ensure that all meters read correctly. You want to validate for yourself? Just download and extract the source code. The directory `validation` contains instructions and FLAC-compressed wave files. To validate **ITU-R** mode, please download [ITU-R BS.2217-1](#) and follow the instructions (ignore the tests for loudness gating). A word of warning: these audio files may **damage your ears** and speakers, so please watch your monitor levels!

After opening the **validation window** (see [section 4.8](#)), click on the ellipsis button (the one with the dots) to select an audio file for playback through K-Meter. Please make sure that the sample rates of your host (**Host SR**) and the audio file match, otherwise the results will not be correct.

Now, select which **variables** (if any) should be dumped. You may also restrict dumped data to a specific audio **channel**. Check **CSV** if you want to feed the output to a parser.

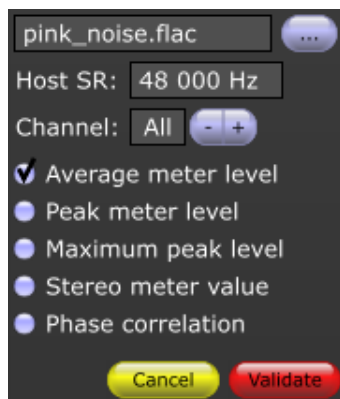

Finally, click on the **validate** button to reset all meters and start playback of the selected audio file. All audio input will be discarded during playback and for an additional ten seconds. To stop playback early, simply click on the **validate** button again.

In case you want to calibrate your monitor system, locate the file `pink_noise_bandlimited.flac` in the directory `validation`, set K-Meter to **RMS** mode and click on the **validate** button. Please ensure that all intermediate software and hardware mixers are set to the correct levels.


## 6.1 Validation status

	Readout	RMS	ITU-R
<b>Avg level meter</b>	meter ballistics	✓	✓
	readings	✓	—
	frequency response	✓	✓
	pink noise	✓	—
	ITU-R BS.2217-1	—	✓
<b>Peak level meter</b>	meter ballistics	✓	✓
	readings	✓	✓
<b>Maximum peak</b>	readings	✓	✓
<b>Overload counter</b>	readings	✓	✓
<b>Phase correlation</b>	readings	✓	✓
<b>Stereo meter</b>	readings	✓	✓


## 6.2 Frequency and phase response

Frequency and phase response have been determined at a sample rate of 192 kHz using [VST Plugin Analyser](#).


**Frequency response of complete effect path (5 Hz to 96 kHz,  $0 \text{ dB} \pm 0.1 \text{ dB}$ ):**

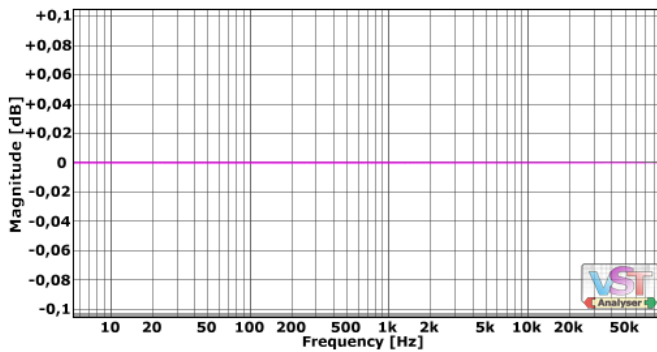


**Phase response of complete effect path (5 Hz to 96 kHz,  $0^\circ \pm 0.1^\circ$ ):**

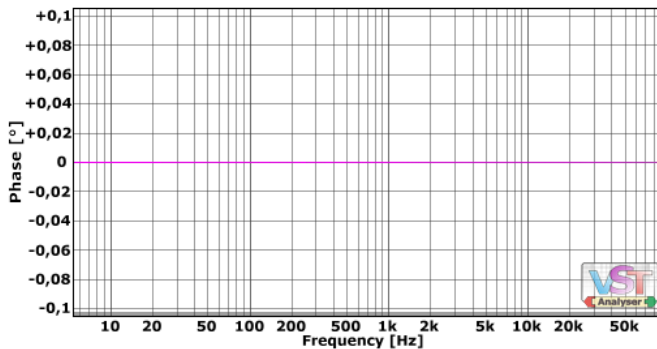


**Frequency response of band-limited RMS detection stage (5 Hz to 96 kHz,  $-140$  dB to  $5$  dB):**

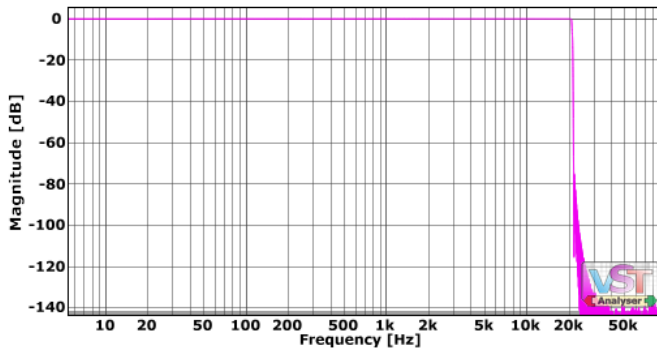


**Phase response of band-limited RMS detection stage (5 Hz to 96 kHz,  $-180^\circ$  to  $180^\circ$ ):**

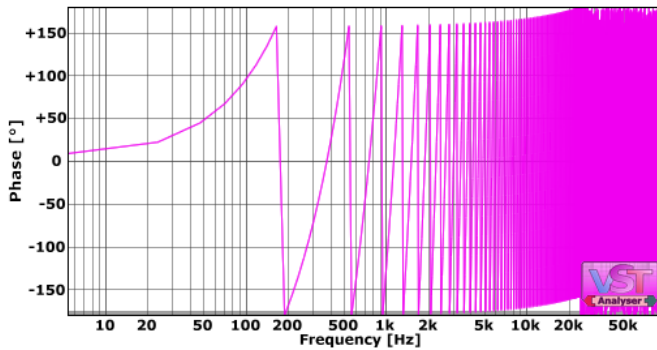


**Frequency response of band-limited ITU-R BS.1770-1 detection stage (5 Hz to 96 kHz,  $-140$  dB to  $5$  dB):**

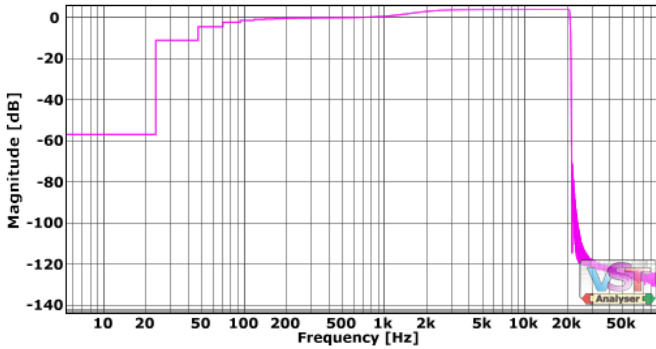


**Phase response of band-limited ITU-R BS.1770-1 detection stage (5 Hz to 96 kHz,  $-180^\circ$  to  $180^\circ$ ):**

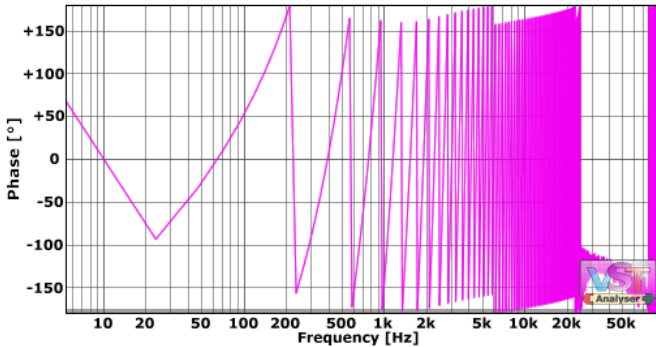

**Frequency response of band-limited RMS detection stage  
(5 Hz to 96 kHz, 0 dB  $\pm$  1 dB):**

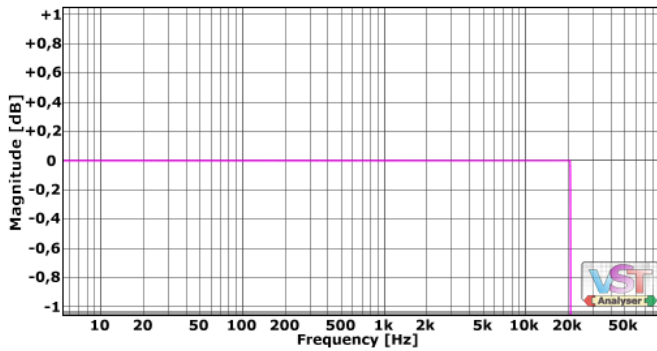

**Frequency response of band-limited ITU-R BS.1770-1 de-  
tection stage (5 Hz to 96 kHz, 0 dB -6 dB to 4 dB):**

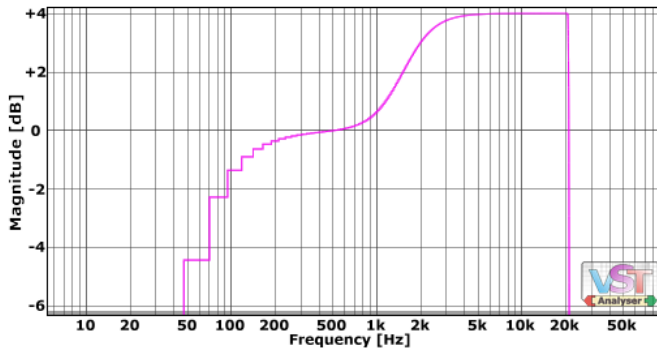



## 7 Help needed

As K-Meter was coded using cross-platform code, it should be easy to compile on Mac OS X. I just don't have a Mac ...

In case you want to help, please see the next chapter for an email address. You'll need sufficient experience in coding, compiling and debugging, though, so no beginners please!

## 8 Final words

I want to express my gratitude to **Bob Katz** for kindly answering all of my questions regarding the K-System meter and checking this document for technical errors. I'd further like to thank **bram@smartelectronix** for his code to calculate logarithmic rise and fall times, and **Raiden** for working out the ITU-R BS.1770-1 filter specifications. I must also thank the **beta testers** and **users of K-Meter** for sending kind words, suggestions and bug reports. Finally, I want to thank the **open source community** for making all of this possible.

Although coding K-Meter has been a lot of fun, it has also been a lot of work. So if you like K-Meter, why not send me a short email and tell me so? Write a few words about yourself, send suggestions for future updates or volunteer to create a nice theme. I also really enjoy listening to music that you may have produced using my software...

Here is my email address (please remove “-nospam”):

"Martin Zuther" <code-nospam@mpzuther.de>

Thanks for using free software. I hope you'll enjoy it!

## *Final words*

---

*VST is a trademark of Steinberg Media Technologies GmbH.  
ASIO is a trademark and software of Steinberg Media Technologies GmbH.*

# A How to build K-Meter

## A.1 Preparing GNU/Linux

To build K-Meter yourself, I recommend setting up a chroot environment. This is fast and easy to do on Debian-based systems and might save you a **lot** of trouble. At the time of writing, I'm using Linux Mint 17, but the procedure should be similar on your distribution of choice.

If you aim at generic 64-bit compilation, simply change i386 to amd64 and x32 to x64. If you experience problems, try to change stable to a release name such as wheezy.

To install the necessary packages and install the chroot base system, execute the following statements (please change <http://ftp.de.debian.org/debian/> to a [mirror](#) close to you):

```
sudo apt-get install debootstrap schroot
```

```
sudo debootstrap --variant=buildd \  
  --arch i386 stable \  
  /srv/chroot/stable_i386 \  
  http://ftp.de.debian.org/debian/
```

Running `debootstrap` will take some time. Meanwhile, add the following lines to `/etc/schroot/schroot.conf` (make sure you remove all preceding white space so that each line begins in the first column):

```
[stable-i386]
description=Debian stable (i386)
directory=/srv/chroot/stable_i386
personality=linux
root-users=username
type=directory
users=username,another_user
```

Please make the necessary changes to `username`. You may also add additional users, like `another_user`. In case you are setting up a 32-bit chroot environment on a 64-bit system, you'll also have to change `linux` to `linux32`.

When `debootstrap` is done, log in as `superuser`:

```
schroot -c stable-i386 -u root
```

to install a few packages. The packages `less` and `vim` are optional, but might come in handy:

```
apt-get update
apt-get -y install bash-completion libasound2-dev \
    libjack-jackd2-dev mesa-common-dev xorg-dev \
    less vim
apt-get clean
```

If you like bash completion, you might also want to open the file `/etc/bash.bashrc` and unquote these lines:

```
# enable bash completion in interactive shells
[a couple of lines...]
fi
```

Finally, log out and log in as normal user:

```
schroot -c stable-i386
```

Congratulations – after you have installed the dependencies (see below), you are ready to build K-Meter.

## A.2 Dependencies

### A.2.1 premake4

Importance: required

Version: 4.3

License: BSD

Homepage: [industriousone.com/premake](http://industriousone.com/premake)

### Installation

Place the binary somewhere in your PATH. Depending on your platform, you should run *premake* using the scripts `Builds/run_premake.sh` or `Builds/run_premake.bat`.

## **A.2.2 JUCE library**

Importance: required

Version: 3.0.5

License: GPL v2 (among others)

Homepage: [www.juce.com](http://www.juce.com)

### **Installation**

Extract the archive into the directory `libraries/juce`.

If you want to build the LV2 plug-in, please extract the archive `distrho_lv2-xxxxxxxxxx.tar.gz` into the same directory.

## **A.2.3 Virtual Studio Technology SDK**

Importance: optional

Version: 2.4

License: proprietary

Homepage: [ygrabit.steinberg.de](http://ygrabit.steinberg.de)

### **Installation**

Just extract the archive into the directory `libraries/vstsdk2.4`.

## **A.2.4 Audio Streaming Input Output SDK**

Importance: optional  
Version: 2.2  
License: proprietary  
Homepage: [ygrabit.steinberg.de](http://ygrabit.steinberg.de)

### **Installation**

Simply extract the archive into the directory `libraries/asiosdk2.2`.

## **A.2.5 Fastest Fourier Transform in the West**

Importance: required  
Version: 3.3.2  
License: GPL v2  
Homepage: [www.fftw.org](http://www.fftw.org)

### **Installation on GNU/Linux**

Extract the archive into the directory `libraries/fftw3`, change into this directory and run:

```
./configure --enable-float --with-pic  
make  
mkdir -p bin/linux/i386/  
mv .libs/* bin/linux/i386/
```



## Installation on Mac OS X

Extract the archive into the directory `libraries/fftw3`, change into this directory and run:

```
./configure --enable-float --with-pic  
make  
mkdir -p bin/mac/x32/  
mv .libs/* bin/mac/x32/
```

## Installation on Microsoft Windows

Extract the source code archive into the directory `libraries/fftw3` and the archive containing the pre-compiled binaries into the directory `libraries/fftw3/bin`.

Please note that in order to run K-Meter on Windows, the library `libfftw3f-3.dll` (or `libfftw3f-3_x64.dll`) **must** be located in the same directory as the standalone or plugin. To make things a little easier for you, I have already placed these files in the directories `bin` and `bin/final`.

### A.2.6 Python

Importance: optional

Version: 3.2 (or higher)

License: Python Software Foundation License

Homepage: [www.python.org](http://www.python.org)

You'll only need Python if you want to build 64-bit versions of K-Meter using Visual Studio Express.

### **Installation (Windows)**

You can download an installer from the website. Please also install the [Windows SDK](#) and change `run_premake.bat` to reflect the SDK's version number.

### **A.2.7 Artistic Style**

Importance: optional

Version: 2.01

License: LGPL v3

Homepage: [astyle.sourceforge.net](http://astyle.sourceforge.net)

This application formats the code so it looks more beautiful and consistent. Thus, you only have to install it if you plan to help me with coding K-Meter.

### **Installation**

Place the binary somewhere in your PATH. Depending on your platform, you should run *astyle* using the scripts `Source/format_code.sh` or `Source/format_code.bat`.

## **A.3 Building on GNU/Linux**

After preparing the dependencies, start your chroot environment, change into the directory `build` and execute

```
./run_premake.sh  
make config=CFG TARGET
```

where `CFG` is one of `debug32`, `debug64`, `release32` and `release64`, and `TARGET` is one of `linux_standalone_stereo`, `linux_standalone_surround`, `linux_vst_stereo` and `linux_vst_surround`.

The compiled binaries will end up in the directory `bin`.

## **A.4 Building on Microsoft Windows**

After preparing the dependencies, change into the directory `build` and execute

```
./run_premake.bat
```

Then change into the directory `Builds/windows/vs20xx`, open the project file with the corresponding version of Visual C++ and build the project.

The compiled binaries will end up in the directory `bin`.

# B GNU General Public License

Version 3, 29 June 2007

Copyright © 2007 Free Software Foundation, Inc.  
<http://fsf.org/>

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

## Preamble

The GNU General Public License is a free, copyleft license for software and other kinds of works.

The licenses for most software and other practical works are designed to take away your freedom to share and change the works. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change all versions of a program—to make sure it remains free software for all its users. We, the Free Software Foundation, use the

GNU General Public License for most of our software; it applies also to any other work released this way by its authors. You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for them if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs, and that you know you can do these things.

To protect your rights, we need to prevent others from denying you these rights or asking you to surrender the rights. Therefore, you have certain responsibilities if you distribute copies of the software, or if you modify it: responsibilities to respect the freedom of others.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must pass on to the recipients the same freedoms that you received. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

Developers that use the GNU GPL protect your rights with two steps: (1) assert copyright on the software, and (2) offer you this License giving you legal permission to copy, distribute and/or modify it.

For the developers' and authors' protection, the GPL clearly explains that there is no warranty for this free software. For

both users' and authors' sake, the GPL requires that modified versions be marked as changed, so that their problems will not be attributed erroneously to authors of previous versions.

Some devices are designed to deny users access to install or run modified versions of the software inside them, although the manufacturer can do so. This is fundamentally incompatible with the aim of protecting users' freedom to change the software. The systematic pattern of such abuse occurs in the area of products for individuals to use, which is precisely where it is most unacceptable. Therefore, we have designed this version of the GPL to prohibit the practice for those products. If such problems arise substantially in other domains, we stand ready to extend this provision to those domains in future versions of the GPL, as needed to protect the freedom of users.

Finally, every program is threatened constantly by software patents. States should not allow patents to restrict development and use of software on general-purpose computers, but in those that do, we wish to avoid the special danger that patents applied to a free program could make it effectively proprietary. To prevent this, the GPL assures that patents cannot be used to render the program non-free.

The precise terms and conditions for copying, distribution and modification follow.

## TERMS AND CONDITIONS

### 0. Definitions.

“This License” refers to version 3 of the GNU General Public License.

“Copyright” also means copyright-like laws that apply to other kinds of works, such as semiconductor masks.

“The Program” refers to any copyrightable work licensed under this License. Each licensee is addressed as “you”. “Licensees” and “recipients” may be individuals or organizations.

To “modify” a work means to copy from or adapt all or part of the work in a fashion requiring copyright permission, other than the making of an exact copy. The resulting work is called a “modified version” of the earlier work or a work “based on” the earlier work.

A “covered work” means either the unmodified Program or a work based on the Program.

To “propagate” a work means to do anything with it that, without permission, would make you directly or secondarily liable for infringement under applicable copyright law, except executing it on a computer or modifying a private copy. Propagation includes copying, distribution (with or without modification), making available to the public, and in some countries other activities as well.

To “convey” a work means any kind of propagation that enables other parties to make or receive copies. Mere interaction with a user through a computer network, with no transfer of a copy, is not conveying.

An interactive user interface displays “Appropriate Legal Notices” to the extent that it includes a convenient and prominently visible feature that (1) displays an appropriate copyright notice, and (2) tells the user that there is no warranty for the work (except to the extent that warranties are provided), that licensees may convey the work under this License, and how to view a copy of this License. If the interface presents a list of user commands or options, such as a menu, a prominent item in the list meets this criterion.

#### 1. Source Code.

The “source code” for a work means the preferred form of the work for making modifications to it. “Object code” means any non-source form of a work.

A “Standard Interface” means an interface that either is an official standard defined by a recognized standards body, or, in the case of interfaces specified for a particular programming language, one that is widely used among developers working in that language.

The “System Libraries” of an executable work include anything, other than the work as a whole, that (a) is included in the normal form of packaging a Major Component, but which is not part of that Major Component, and (b) serves only to enable use of the work with



that Major Component, or to implement a Standard Interface for which an implementation is available to the public in source code form. A “Major Component”, in this context, means a major essential component (kernel, window system, and so on) of the specific operating system (if any) on which the executable work runs, or a compiler used to produce the work, or an object code interpreter used to run it.

The “Corresponding Source” for a work in object code form means all the source code needed to generate, install, and (for an executable work) run the object code and to modify the work, including scripts to control those activities. However, it does not include the work’s System Libraries, or general-purpose tools or generally available free programs which are used unmodified in performing those activities but which are not part of the work. For example, Corresponding Source includes interface definition files associated with source files for the work, and the source code for shared libraries and dynamically linked subprograms that the work is specifically designed to require, such as by intimate data communication or control flow between those subprograms and other parts of the work.

The Corresponding Source need not include anything that users can regenerate automatically from other parts of the Corresponding Source.

The Corresponding Source for a work in source code form is that same work.

## 2. Basic Permissions.

All rights granted under this License are granted for the term of copyright on the Program, and are irrevocable provided the stated conditions are met. This License explicitly affirms your unlimited permission to run the unmodified Program. The output from running a covered work is covered by this License only if the output, given its content, constitutes a covered work. This License acknowledges your rights of fair use or other equivalent, as provided by copyright law.

You may make, run and propagate covered works that you do not convey, without conditions so long as your license otherwise remains in force. You may convey covered works to others for the sole purpose of having them make modifications exclusively for you, or provide you with facilities for running those works, provided that you comply with the terms of this License in conveying all material for which you do not control copyright. Those thus making or running the covered works for you must do so exclusively on your behalf, under your direction and control, on terms that prohibit them from making any copies of your copyrighted material outside their relationship with you.

Conveying under any other circumstances is permitted solely under the conditions stated below. Sublicensing is not allowed; section 10 makes it unnecessary.

3. Protecting Users' Legal Rights From Anti-Circumvention Law.

No covered work shall be deemed part of an effective technological measure under any applicable law fulfilling obligations under article 11 of the WIPO copyright treaty adopted on 20 December 1996, or similar laws prohibiting or restricting circumvention of such measures.

When you convey a covered work, you waive any legal power to forbid circumvention of technological measures to the extent such circumvention is effected by exercising rights under this License with respect to the covered work, and you disclaim any intention to limit operation or modification of the work as a means of enforcing, against the work's users, your or third parties' legal rights to forbid circumvention of technological measures.

4. Conveying Verbatim Copies.

You may convey verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice; keep intact all notices stating that this License and any non-permissive terms added in accord with section 7 apply to the code; keep intact all notices of the absence of any warranty; and give all recipients a copy of this License along with the Program.

You may charge any price or no price for each copy that you convey, and you may offer support or warranty protection for a fee.

5. Conveying Modified Source Versions.

You may convey a work based on the Program, or the modifications to produce it from the Program, in the form of source code under the terms of section 4, provided that you also meet all of these conditions:

- a) The work must carry prominent notices stating that you modified it, and giving a relevant date.
- b) The work must carry prominent notices stating that it is released under this License and any conditions added under section 7. This requirement modifies the requirement in section 4 to “keep intact all notices”.
- c) You must license the entire work, as a whole, under this License to anyone who comes into possession of a copy. This License will therefore apply, along with any applicable section 7 additional terms, to the whole of the work, and all its parts, regardless of how they are packaged. This License gives no permission to license the work in any other way, but it does not invalidate such permission if you have separately received it.
- d) If the work has interactive user interfaces, each must display Appropriate Legal Notices; however, if the Program has interactive interfaces that

do not display Appropriate Legal Notices, your work need not make them do so.

A compilation of a covered work with other separate and independent works, which are not by their nature extensions of the covered work, and which are not combined with it such as to form a larger program, in or on a volume of a storage or distribution medium, is called an “aggregate” if the compilation and its resulting copyright are not used to limit the access or legal rights of the compilation’s users beyond what the individual works permit. Inclusion of a covered work in an aggregate does not cause this License to apply to the other parts of the aggregate.

#### 6. Conveying Non-Source Forms.

You may convey a covered work in object code form under the terms of sections 4 and 5, provided that you also convey the machine-readable Corresponding Source under the terms of this License, in one of these ways:

- a) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by the Corresponding Source fixed on a durable physical medium customarily used for software interchange.
- b) Convey the object code in, or embodied in, a physical product (including a physical distribution medium), accompanied by a written offer, valid for at least three years and valid for as long

as you offer spare parts or customer support for that product model, to give anyone who possesses the object code either (1) a copy of the Corresponding Source for all the software in the product that is covered by this License, on a durable physical medium customarily used for software interchange, for a price no more than your reasonable cost of physically performing this conveying of source, or (2) access to copy the Corresponding Source from a network server at no charge.

- c) Convey individual copies of the object code with a copy of the written offer to provide the Corresponding Source. This alternative is allowed only occasionally and noncommercially, and only if you received the object code with such an offer, in accord with subsection 6b.
- d) Convey the object code by offering access from a designated place (gratis or for a charge), and offer equivalent access to the Corresponding Source in the same way through the same place at no further charge. You need not require recipients to copy the Corresponding Source along with the object code. If the place to copy the object code is a network server, the Corresponding Source may be on a different server (operated by you or a third party) that supports equivalent copying facilities, provided you maintain clear directions next to the object code saying where to find the

Corresponding Source. Regardless of what server hosts the Corresponding Source, you remain obligated to ensure that it is available for as long as needed to satisfy these requirements.

- e) Convey the object code using peer-to-peer transmission, provided you inform other peers where the object code and Corresponding Source of the work are being offered to the general public at no charge under subsection 6d.

A separable portion of the object code, whose source code is excluded from the Corresponding Source as a System Library, need not be included in conveying the object code work.

A “User Product” is either (1) a “consumer product”, which means any tangible personal property which is normally used for personal, family, or household purposes, or (2) anything designed or sold for incorporation into a dwelling. In determining whether a product is a consumer product, doubtful cases shall be resolved in favor of coverage. For a particular product received by a particular user, “normally used” refers to a typical or common use of that class of product, regardless of the status of the particular user or of the way in which the particular user actually uses, or expects or is expected to use, the product. A product is a consumer product regardless of whether the product has substantial commercial, industrial or non-consumer uses, unless such uses represent the only significant mode of use of the product.

“Installation Information” for a User Product means any methods, procedures, authorization keys, or other information required to install and execute modified versions of a covered work in that User Product from a modified version of its Corresponding Source. The information must suffice to ensure that the continued functioning of the modified object code is in no case prevented or interfered with solely because modification has been made.

If you convey an object code work under this section in, or with, or specifically for use in, a User Product, and the conveying occurs as part of a transaction in which the right of possession and use of the User Product is transferred to the recipient in perpetuity or for a fixed term (regardless of how the transaction is characterized), the Corresponding Source conveyed under this section must be accompanied by the Installation Information. But this requirement does not apply if neither you nor any third party retains the ability to install modified object code on the User Product (for example, the work has been installed in ROM).

The requirement to provide Installation Information does not include a requirement to continue to provide support service, warranty, or updates for a work that has been modified or installed by the recipient, or for the User Product in which it has been modified or installed. Access to a network may be denied when the modification itself materially and adversely affects the



operation of the network or violates the rules and protocols for communication across the network.

Corresponding Source conveyed, and Installation Information provided, in accord with this section must be in a format that is publicly documented (and with an implementation available to the public in source code form), and must require no special password or key for unpacking, reading or copying.

## 7. Additional Terms.

“Additional permissions” are terms that supplement the terms of this License by making exceptions from one or more of its conditions. Additional permissions that are applicable to the entire Program shall be treated as though they were included in this License, to the extent that they are valid under applicable law. If additional permissions apply only to part of the Program, that part may be used separately under those permissions, but the entire Program remains governed by this License without regard to the additional permissions.

When you convey a copy of a covered work, you may at your option remove any additional permissions from that copy, or from any part of it. (Additional permissions may be written to require their own removal in certain cases when you modify the work.) You may place additional permissions on material, added by you to a covered work, for which you have or can give appropriate copyright permission.

Notwithstanding any other provision of this License, for material you add to a covered work, you may (if authorized by the copyright holders of that material) supplement the terms of this License with terms:

- a) Disclaiming warranty or limiting liability differently from the terms of sections 15 and 16 of this License; or
- b) Requiring preservation of specified reasonable legal notices or author attributions in that material or in the Appropriate Legal Notices displayed by works containing it; or
- c) Prohibiting misrepresentation of the origin of that material, or requiring that modified versions of such material be marked in reasonable ways as different from the original version; or
- d) Limiting the use for publicity purposes of names of licensors or authors of the material; or
- e) Declining to grant rights under trademark law for use of some trade names, trademarks, or service marks; or
- f) Requiring indemnification of licensors and authors of that material by anyone who conveys the material (or modified versions of it) with contractual assumptions of liability to the recipient, for any liability that these contractual assumptions directly impose on those licensors and authors.

All other non-permissive additional terms are considered “further restrictions” within the meaning of section 10. If the Program as you received it, or any part of it, contains a notice stating that it is governed by this License along with a term that is a further restriction, you may remove that term. If a license document contains a further restriction but permits relicensing or conveying under this License, you may add to a covered work material governed by the terms of that license document, provided that the further restriction does not survive such relicensing or conveying.

If you add terms to a covered work in accord with this section, you must place, in the relevant source files, a statement of the additional terms that apply to those files, or a notice indicating where to find the applicable terms.

Additional terms, permissive or non-permissive, may be stated in the form of a separately written license, or stated as exceptions; the above requirements apply either way.

## 8. Termination.

You may not propagate or modify a covered work except as expressly provided under this License. Any attempt otherwise to propagate or modify it is void, and will automatically terminate your rights under this License (including any patent licenses granted under the third paragraph of section 11).

However, if you cease all violation of this License, then your license from a particular copyright holder is reinstated (a) provisionally, unless and until the copyright holder explicitly and finally terminates your license, and (b) permanently, if the copyright holder fails to notify you of the violation by some reasonable means prior to 60 days after the cessation.

Moreover, your license from a particular copyright holder is reinstated permanently if the copyright holder notifies you of the violation by some reasonable means, this is the first time you have received notice of violation of this License (for any work) from that copyright holder, and you cure the violation prior to 30 days after your receipt of the notice.

Termination of your rights under this section does not terminate the licenses of parties who have received copies or rights from you under this License. If your rights have been terminated and not permanently reinstated, you do not qualify to receive new licenses for the same material under section 10.

## 9. Acceptance Not Required for Having Copies.

You are not required to accept this License in order to receive or run a copy of the Program. Ancillary propagation of a covered work occurring solely as a consequence of using peer-to-peer transmission to receive a copy likewise does not require acceptance. However, nothing other than this License grants you permission to propagate or modify any covered work.

These actions infringe copyright if you do not accept this License. Therefore, by modifying or propagating a covered work, you indicate your acceptance of this License to do so.

10. Automatic Licensing of Downstream Recipients.

Each time you convey a covered work, the recipient automatically receives a license from the original licensors, to run, modify and propagate that work, subject to this License. You are not responsible for enforcing compliance by third parties with this License.

An “entity transaction” is a transaction transferring control of an organization, or substantially all assets of one, or subdividing an organization, or merging organizations. If propagation of a covered work results from an entity transaction, each party to that transaction who receives a copy of the work also receives whatever licenses to the work the party’s predecessor in interest had or could give under the previous paragraph, plus a right to possession of the Corresponding Source of the work from the predecessor in interest, if the predecessor has it or can get it with reasonable efforts.

You may not impose any further restrictions on the exercise of the rights granted or affirmed under this License. For example, you may not impose a license fee, royalty, or other charge for exercise of rights granted under this License, and you may not initiate litigation (including a cross-claim or counterclaim in a lawsuit)

alleging that any patent claim is infringed by making, using, selling, offering for sale, or importing the Program or any portion of it.

## 11. Patents.

A “contributor” is a copyright holder who authorizes use under this License of the Program or a work on which the Program is based. The work thus licensed is called the contributor’s “contributor version”.

A contributor’s “essential patent claims” are all patent claims owned or controlled by the contributor, whether already acquired or hereafter acquired, that would be infringed by some manner, permitted by this License, of making, using, or selling its contributor version, but do not include claims that would be infringed only as a consequence of further modification of the contributor version. For purposes of this definition, “control” includes the right to grant patent sublicenses in a manner consistent with the requirements of this License.

Each contributor grants you a non-exclusive, worldwide, royalty-free patent license under the contributor’s essential patent claims, to make, use, sell, offer for sale, import and otherwise run, modify and propagate the contents of its contributor version.

In the following three paragraphs, a “patent license” is any express agreement or commitment, however denominated, not to enforce a patent (such as an express permission to practice a patent or covenant not

to sue for patent infringement). To “grant” such a patent license to a party means to make such an agreement or commitment not to enforce a patent against the party.

If you convey a covered work, knowingly relying on a patent license, and the Corresponding Source of the work is not available for anyone to copy, free of charge and under the terms of this License, through a publicly available network server or other readily accessible means, then you must either (1) cause the Corresponding Source to be so available, or (2) arrange to deprive yourself of the benefit of the patent license for this particular work, or (3) arrange, in a manner consistent with the requirements of this License, to extend the patent license to downstream recipients. “Knowingly relying” means you have actual knowledge that, but for the patent license, your conveying the covered work in a country, or your recipient’s use of the covered work in a country, would infringe one or more identifiable patents in that country that you have reason to believe are valid.

If, pursuant to or in connection with a single transaction or arrangement, you convey, or propagate by procuring conveyance of, a covered work, and grant a patent license to some of the parties receiving the covered work authorizing them to use, propagate, modify or convey a specific copy of the covered work, then the patent license you grant is automatically ex-

tended to all recipients of the covered work and works based on it.

A patent license is “discriminatory” if it does not include within the scope of its coverage, prohibits the exercise of, or is conditioned on the non-exercise of one or more of the rights that are specifically granted under this License. You may not convey a covered work if you are a party to an arrangement with a third party that is in the business of distributing software, under which you make payment to the third party based on the extent of your activity of conveying the work, and under which the third party grants, to any of the parties who would receive the covered work from you, a discriminatory patent license (a) in connection with copies of the covered work conveyed by you (or copies made from those copies), or (b) primarily for and in connection with specific products or compilations that contain the covered work, unless you entered into that arrangement, or that patent license was granted, prior to 28 March 2007.

Nothing in this License shall be construed as excluding or limiting any implied license or other defenses to infringement that may otherwise be available to you under applicable patent law.

## 12. No Surrender of Others’ Freedom.

If conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you



from the conditions of this License. If you cannot convey a covered work so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not convey it at all. For example, if you agree to terms that obligate you to collect a royalty for further conveying from those to whom you convey the Program, the only way you could satisfy both those terms and this License would be to refrain entirely from conveying the Program.

13. Use with the GNU Affero General Public License.

Notwithstanding any other provision of this License, you have permission to link or combine any covered work with a work licensed under version 3 of the GNU Affero General Public License into a single combined work, and to convey the resulting work. The terms of this License will continue to apply to the part which is the covered work, but the special requirements of the GNU Affero General Public License, section 13, concerning interaction through a network will apply to the combination as such.

14. Revised Versions of this License.

The Free Software Foundation may publish revised and/or new versions of the GNU General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies that a certain numbered version of the GNU General Public License “or any later version” applies to it, you have the option of following the terms and conditions either of that numbered version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of the GNU General Public License, you may choose any version ever published by the Free Software Foundation.

If the Program specifies that a proxy can decide which future versions of the GNU General Public License can be used, that proxy’s public statement of acceptance of a version permanently authorizes you to choose that version for the Program.

Later license versions may give you additional or different permissions. However, no additional obligations are imposed on any author or copyright holder as a result of your choosing to follow a later version.

#### 15. Disclaimer of Warranty.

THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM “AS IS” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND

FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. Limitation of Liability.

IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MODIFIES AND/OR CONVEYS THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

17. Interpretation of Sections 15 and 16.

If the disclaimer of warranty and limitation of liability provided above cannot be given local legal effect according to their terms, reviewing courts shall apply local law that most closely approximates an absolute

waiver of all civil liability in connection with the Program, unless a warranty or assumption of liability accompanies a copy of the Program in return for a fee.

END OF TERMS AND CONDITIONS

## HOW TO APPLY THESE TERMS TO YOUR NEW PROGRAMS

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively state the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found.

<one line to give the program’s name and a brief idea of what it does.>

Copyright (C) <textyear> <name of author>

This program is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see [<http://www.gnu.org/licenses/>](http://www.gnu.org/licenses/).

Also add information on how to contact you by electronic and paper mail.

If the program does terminal interaction, make it output a short notice like this when it starts in an interactive mode:

```
<program> Copyright (C) <year> <name of author>
```

```
This program comes with ABSOLUTELY NO WARRANTY; for
details type 'show w'. This is free software, and
you are welcome to redistribute it under certain
conditions; type 'show c' for details.
```

The hypothetical commands `show w` and `show c` should show the appropriate parts of the General Public License. Of course, your program's commands might be different; for a GUI interface, you would use an “about box”.

You should also get your employer (if you work as a programmer) or school, if any, to sign a “copyright disclaimer” for the program, if necessary. For more information on this, and how to apply and follow the GNU GPL, see <http://www.gnu.org/licenses/>.

The GNU General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License. But first, please read <http://www.gnu.org/philosophy/why-not-lgpl.html>.