## 18885-MS 24V, 3.6deg. HOWARD

MFG: HOWARD P/N: 1-19-4201 **COIL:** 24V/.16A/140ohm/68mH

**NEMA: 17** 

Uni-Polar 5 lead

600gm/cm (8.32oz/in) holding torque. 3/16" dia. X 7/16" shaft. 2 corner mounting studs. 7" leads. SQ: 1-5/8" L: 1-1/2" (Body) WT: .6


BLACK: POWER + (Common)

RED: BROWN:  $\overline{B}$ WHITE: GREEN:

В


If motor is jerky or just moves back and forth:


Reverse the RED & WHITE

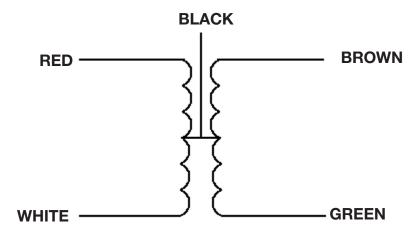

STEP	A	В	Ā	B	COM.
1	-	-			+
2		-	-		+
3			-	-	+
4	-			-	+

## **MOTOR WINDING**







## MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FI 33403 800-652-6733 FAX 561-844-8764 WWW.MPJA.COM