

Xprinter User Guide

XP-H500E thermal printer user guide v1.0



H/W Team > M. Azhar

embinx

Xprinter XP-H500E

- Set up the XPrinter XP-H500E thermal printer with BarTender software to ensure reliable printing of custom die-cut label stickers. This guide includes driver installation, printer calibration, label size configuration, database setup to print multiple label with serial numbers and alignment verification with template dimensions.

The task includes

- Template Software Installation
- Printer Driver installation
- Printer calibration
- Custom sticker label Template creation
 - Dimension 25x10
 - Dimension 20x10
 - Dimension 20x8
 - Dimension 20x5
- Label size configuration

Xprinter XP-H500E

Printer specification

- Model: XP-H500E Transfer Label Printer

Printer Specifications	XP-H500B	XP-H500E
Resolution	203 DPI	300 DPI
Print Method	Thermal Transfer / Direct Thermal	
Memory	8 MB RAM / 8 MB Flash	
Max.Print Width	4.09 in./ 104 mm	4.25 in. / 108 mm
Max.Print Speed	Up to 5 ips (127 mm/s)	Up to 4 ips (102 mm/s)
Media Sensors	Movable Black Mark Sensor / Movable Gap Sensor	
Emulation	TSPL, ZPL, EPL, DPL	
Interface	USB, USB+Serial, USB+Lan, USB+Serial+Lan, USB+Parallel, USB+Parallel+Lan, Optional Wireless Connectivity: Bluetooth / Wi-Fi	
Others	Optional RTC, Standard SD Card Slot	
Media and Ribbon Characteristics		
Media Length	0.39 in.-70 in.(10 mm ~ 1778 mm)	0.39 in. ~ 35 in. (10 mm ~ 889 mm)
Media Width	1 in. ~ 4.6 in. (25.4 mm ~ 118 mm)	
Media Roll Size	5 in. / 127 mm Outer Diameter. Core Inner Diameter: 1 in. (25.4 mm)	

Calibration Button



Power Button

Reference:

Xprinter XP-H500E

Printer specification

- Model: XP-H500E Transfer Label Printer
 - Calibration software: [Diagnostic Tool1.zip](#)
 - Printer user guide: [XP-H500B user manual E-2017-01-06.pdf](#)
 - Bartender Software download: **Xprinter Special Edition Bartender (UltraLite 10.1)** [Link](#)
 - Printer Driver (Label printer Windows): [Driver Link](#)




Reference:


Xprinter XP-H500E

Calibration sensor adjustment

- The Xprinter XP-H500E has 2 sensors that need calibration.
 - Media/ Gap sensor
 - Black mark sensor
- In our use case for printing on **Die-cut**, **Gap**, and **Peel-off** label stickers, only the Media/ Gap sensor will require calibration.


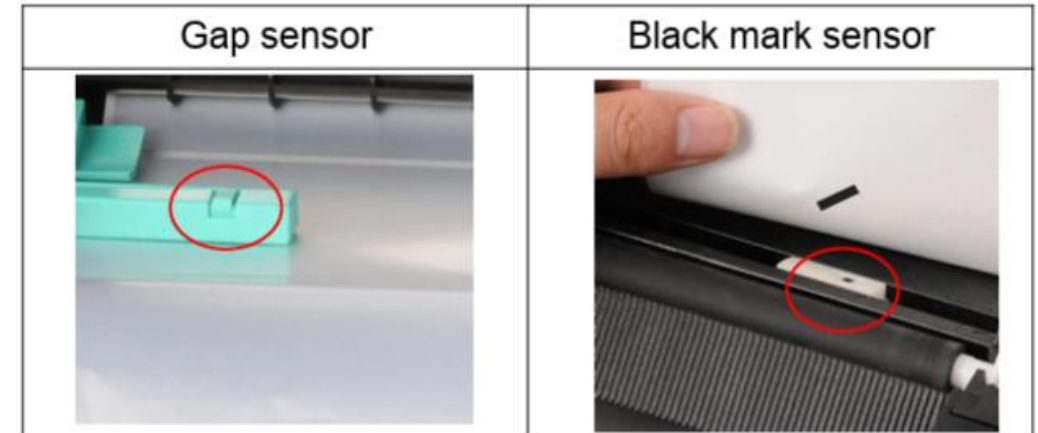


Die cut, Gap and peel-off sticker

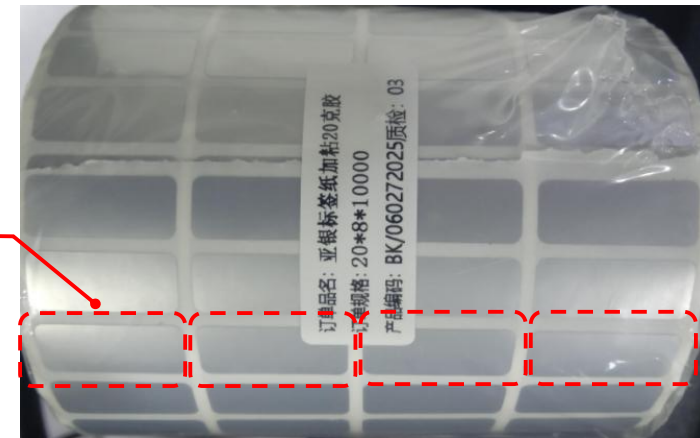

Xprinter XP-H500E



Calibration sensor adjustment/ alignment

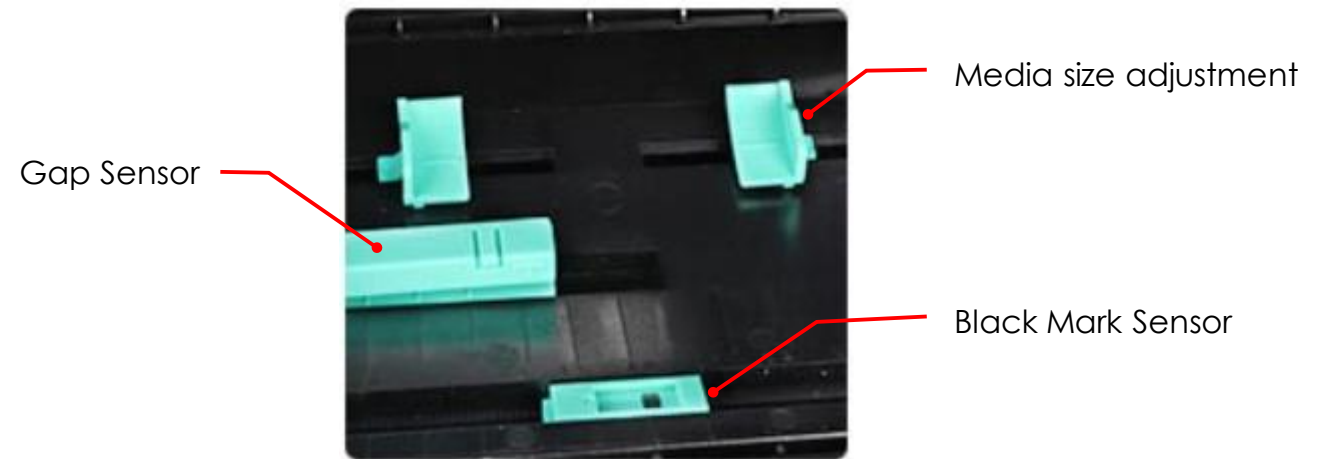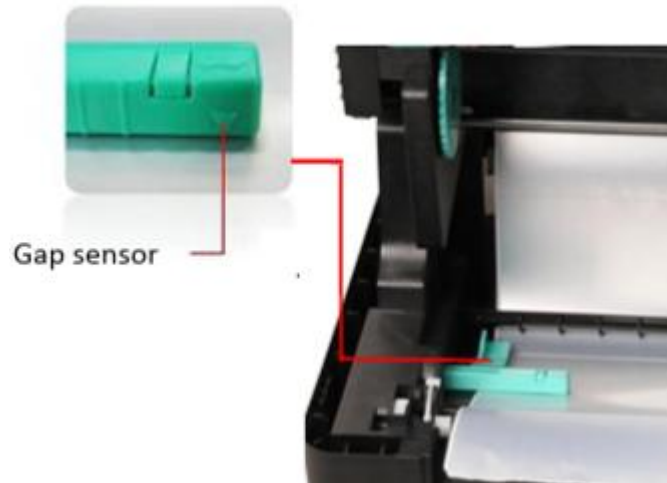

Xprinter XP-H500E

Calibration sensor adjustment

- To calibrate the printer Media/Gap sensor for your custom sticker size, First to manually adjusting/setting the Media/Gap sensor between the sticker vertical gap.
- It will detect the sticker start and end position.
- Gap sensor is adjustable. So, align or set the position of sensor and arrow between vertical gaps/ or on the sticker (as shown in image).

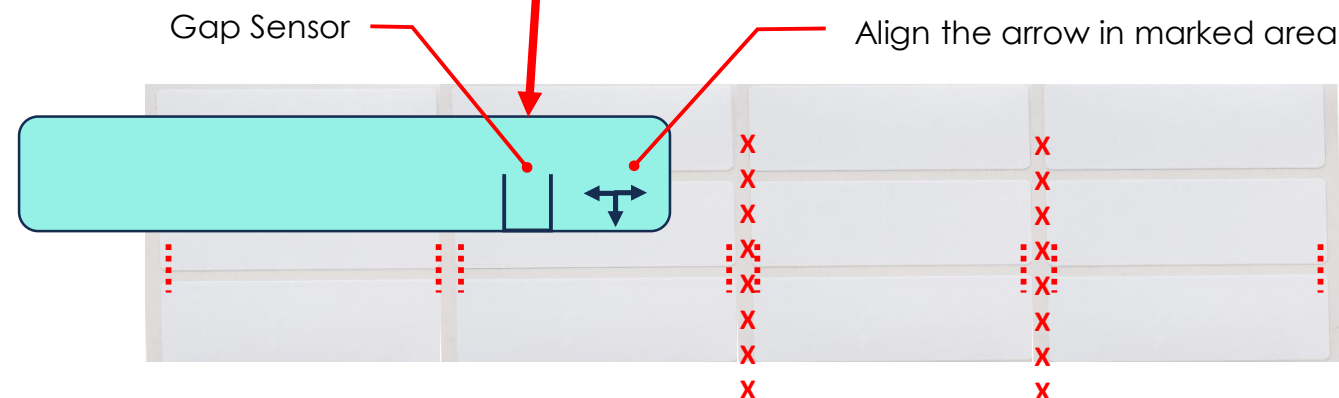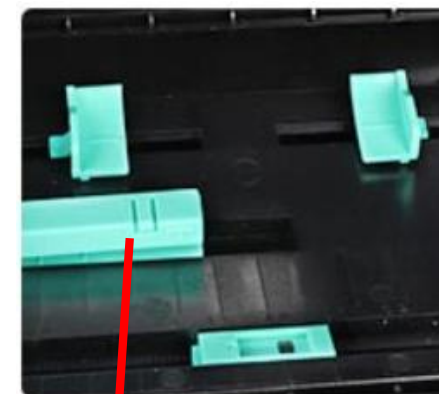

Xprinter XP-H500E

Hard Calibration:

- Turn off the printer power switch Hold on the printer calibration button then turn on the power switch then Release the button when LED indicates with different color for different functions.
- In our case, use **function 1** and **function 5** only. (First try function 1 and then function 5 to check either printer print correctly or not)

Black thermal Ribbon and
gap sensors calibration



Gap sensor calibration

Power on utilities	The LED color will be changed as following pattern:						
LED color	Amber	Red (5 blinks)	Amber (5 blinks)	Green (5 blinks)	Green/Amber (5 blinks)	Red/Amber (5 blinks)	Solid green
Functions							
1. Ribbon sensor calibration and gap / black mark sensor calibration		Release					
2. Gap / black mark sensor calibration, Self-test and enter dump mode			Release				
3. Printer initialization				Release			
4. Set black mark sensor as media sensor and calibrate the black mark sensor					Release		
5. Set gap sensor as media sensor and calibrate the gap sensor						Release	
6. Skip AUTO.BAS							Release

Xprinter XP-H500E

Soft Calibration:

- Open/ Run the printer calibration software [Diagnostic Tool1.zip](#)
- Follow the steps (as shown in image) also check other properties e.g media sensor > gap, Peel-off etc.
- Select the media type Gap and click on the Calibrate button
- Printer will print some blank stickers to calibrate

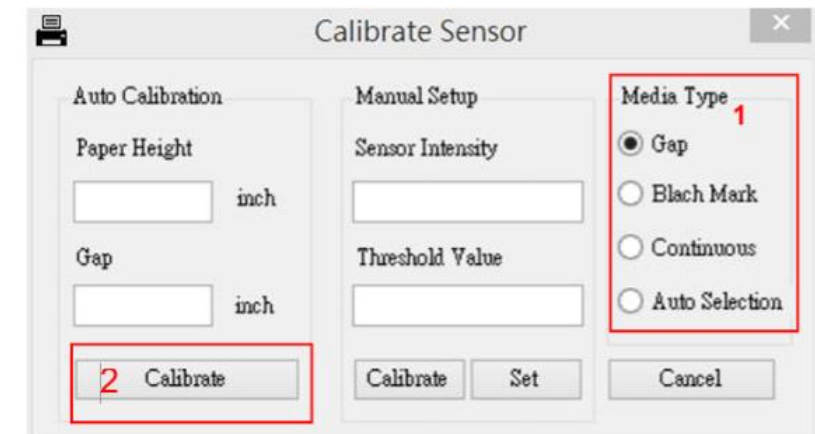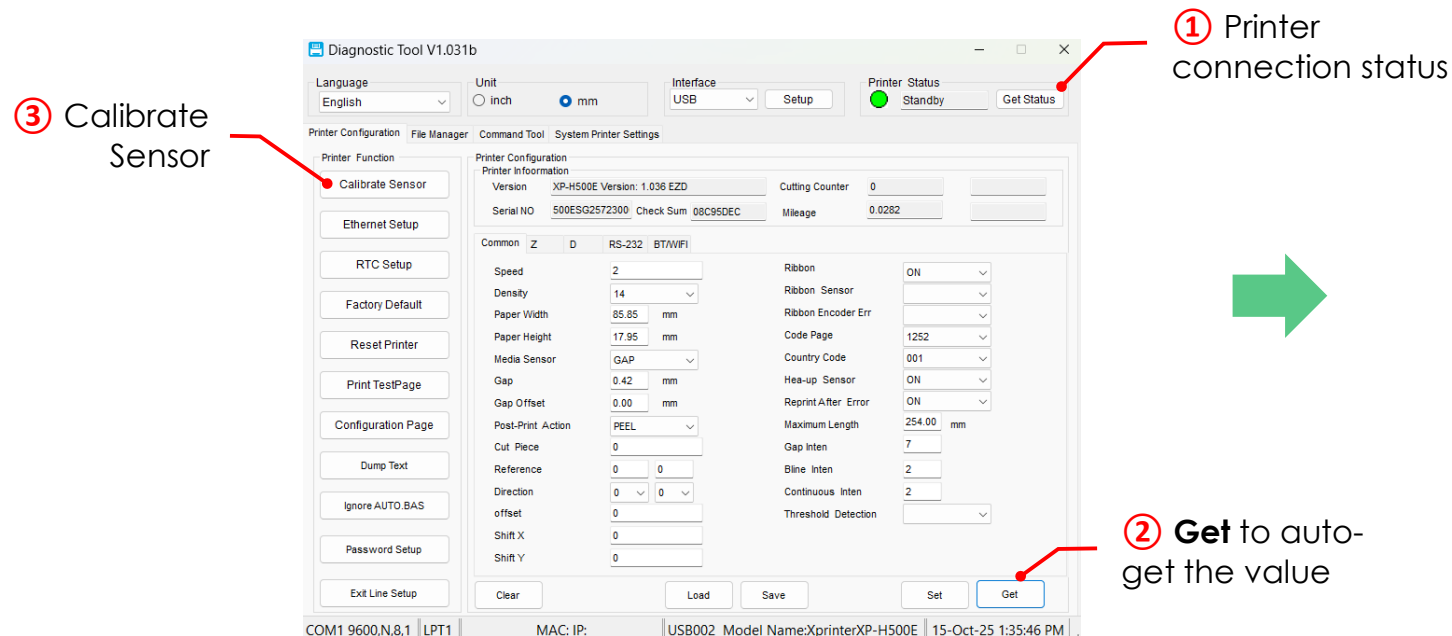

Xprinter XP-H500E

Label/ sticker size identification:



- We have these size of labels/ stickers
 - 25mm x 15mm
 - 20mm x 10mm
 - 20mm x 8mm
 - 20mm x 5mm



Xprinter XP-H500E

How to create small size label sticker template



- Our Printer have label **height limitation** of minimum **10mm**. So, if need to print on small size **5mm** or **8mm** label sticker then.
- **For example:**
20mm x 8mm
- I create **20mm x 18mm** size of label template
 - Width > 20mm
 - Height > 18mm (8mm + 8mm + 2mm gap)
- **For example:**
25mm x 5mm
- I create **25mm x 12mm** size of label template
 - Width > 25mm
 - Height > 12mm (5mm + 5mm + 2mm gap)

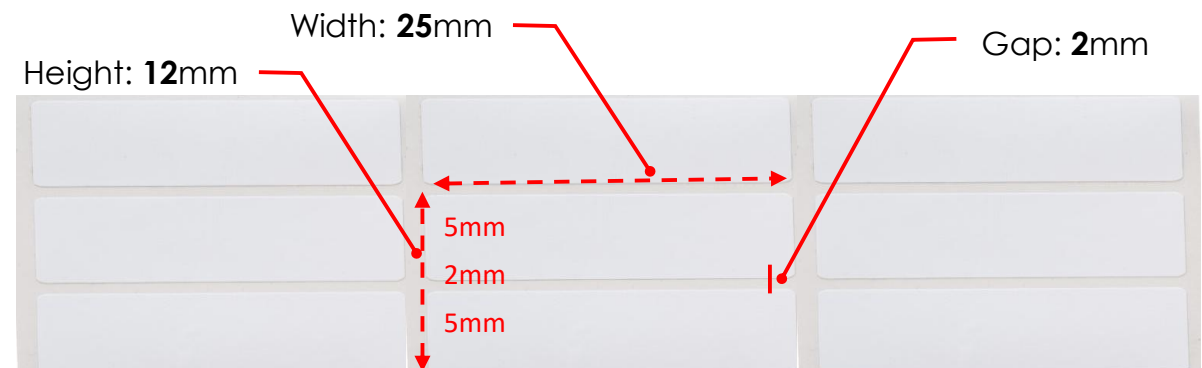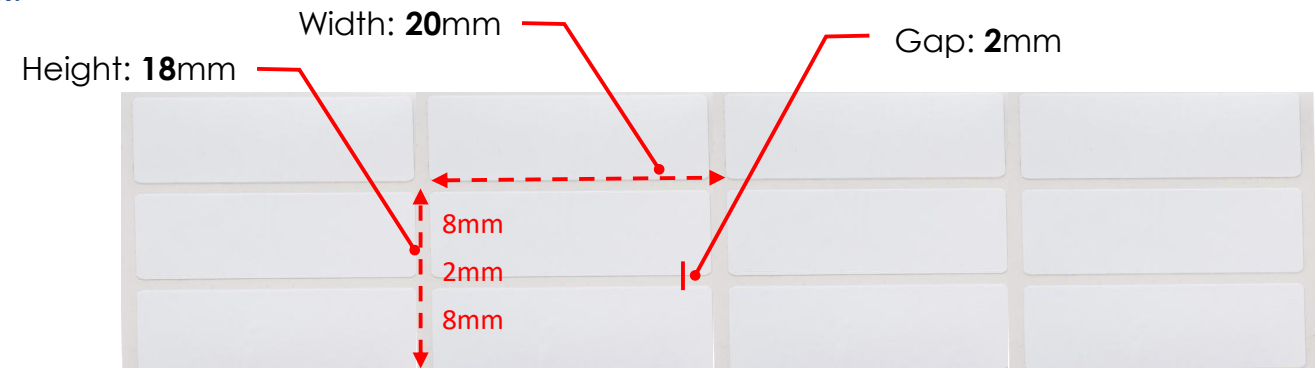

Xprinter XP-H500E

Add the Label/ sticker page size in printer:

- Go to **Control panel > hardware and sound > View devices and printer > Printer and scanner > select the Xprinter > Printing Preference**
- Select **Page setup > New > write the name of template > Die-Cut labels > Width of label (whole width of sticker) > Height of label > sides exposed width > orientation Portrait > Apply**

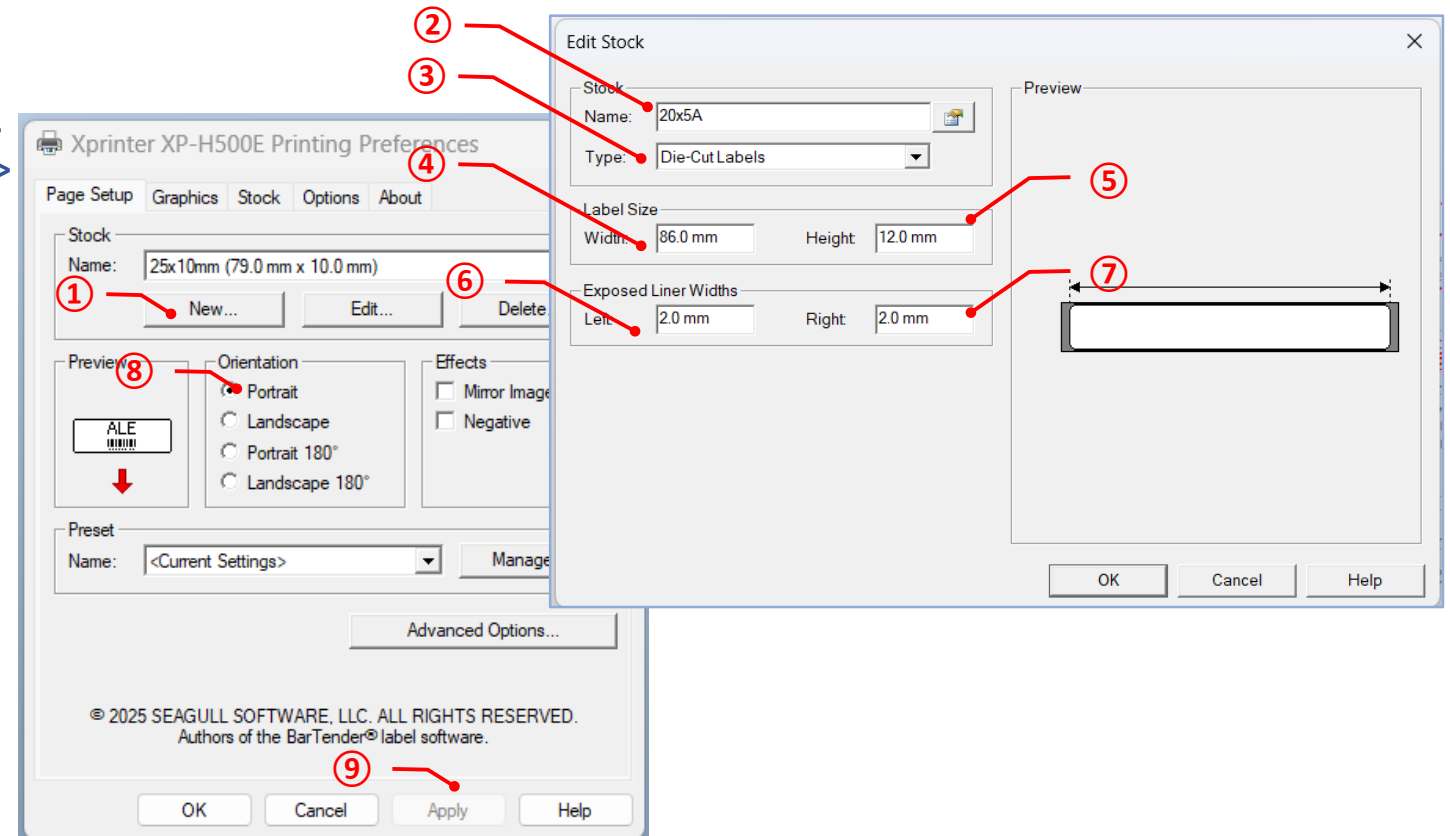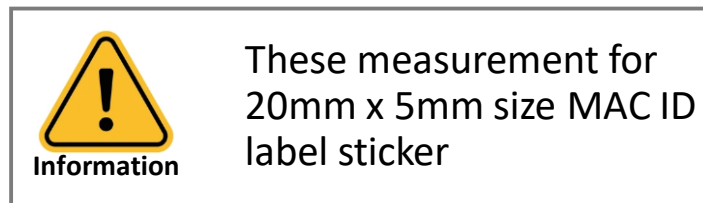

Xprinter XP-H500E

Create Label/ sticker template in Bartender:

- We use BarTender Designer software to design and print serial bar labels and MAC ID labels.
- In this section we will learn about
 - **20mm x 5mm** size MAC ID label sticker



Information

These measurements only
for 20mm x 5mm size MAC ID
label sticker




Xprinter XP-H500E

Create Label/ sticker template in Bartender:

- In BarTender Designer software, you will see a welcome window
 - To create new **custom template document** > select first option
 - To open **existing template document** > select second option

Create new template


Open existing template

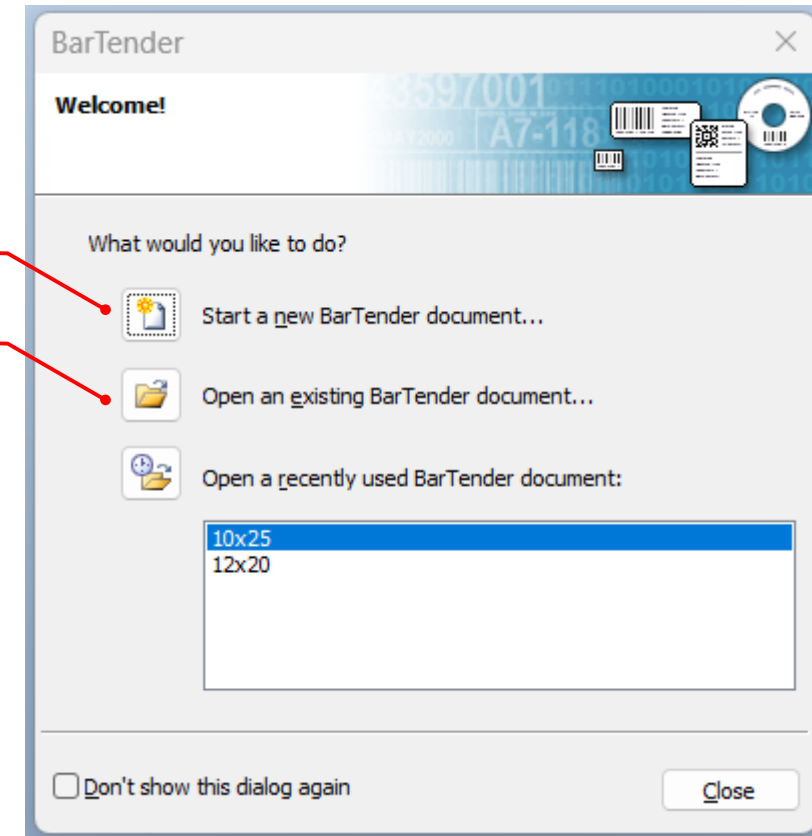

Xprinter XP-H500E

Create Label/ sticker template in Bartender:


- Select the **Blank template** then **Next**
- Select the **Xprinter** (If not shown in list, then install the Xprinter driver from bartender official website, already linked in upper slide)
- Select the **Specify custom settings**

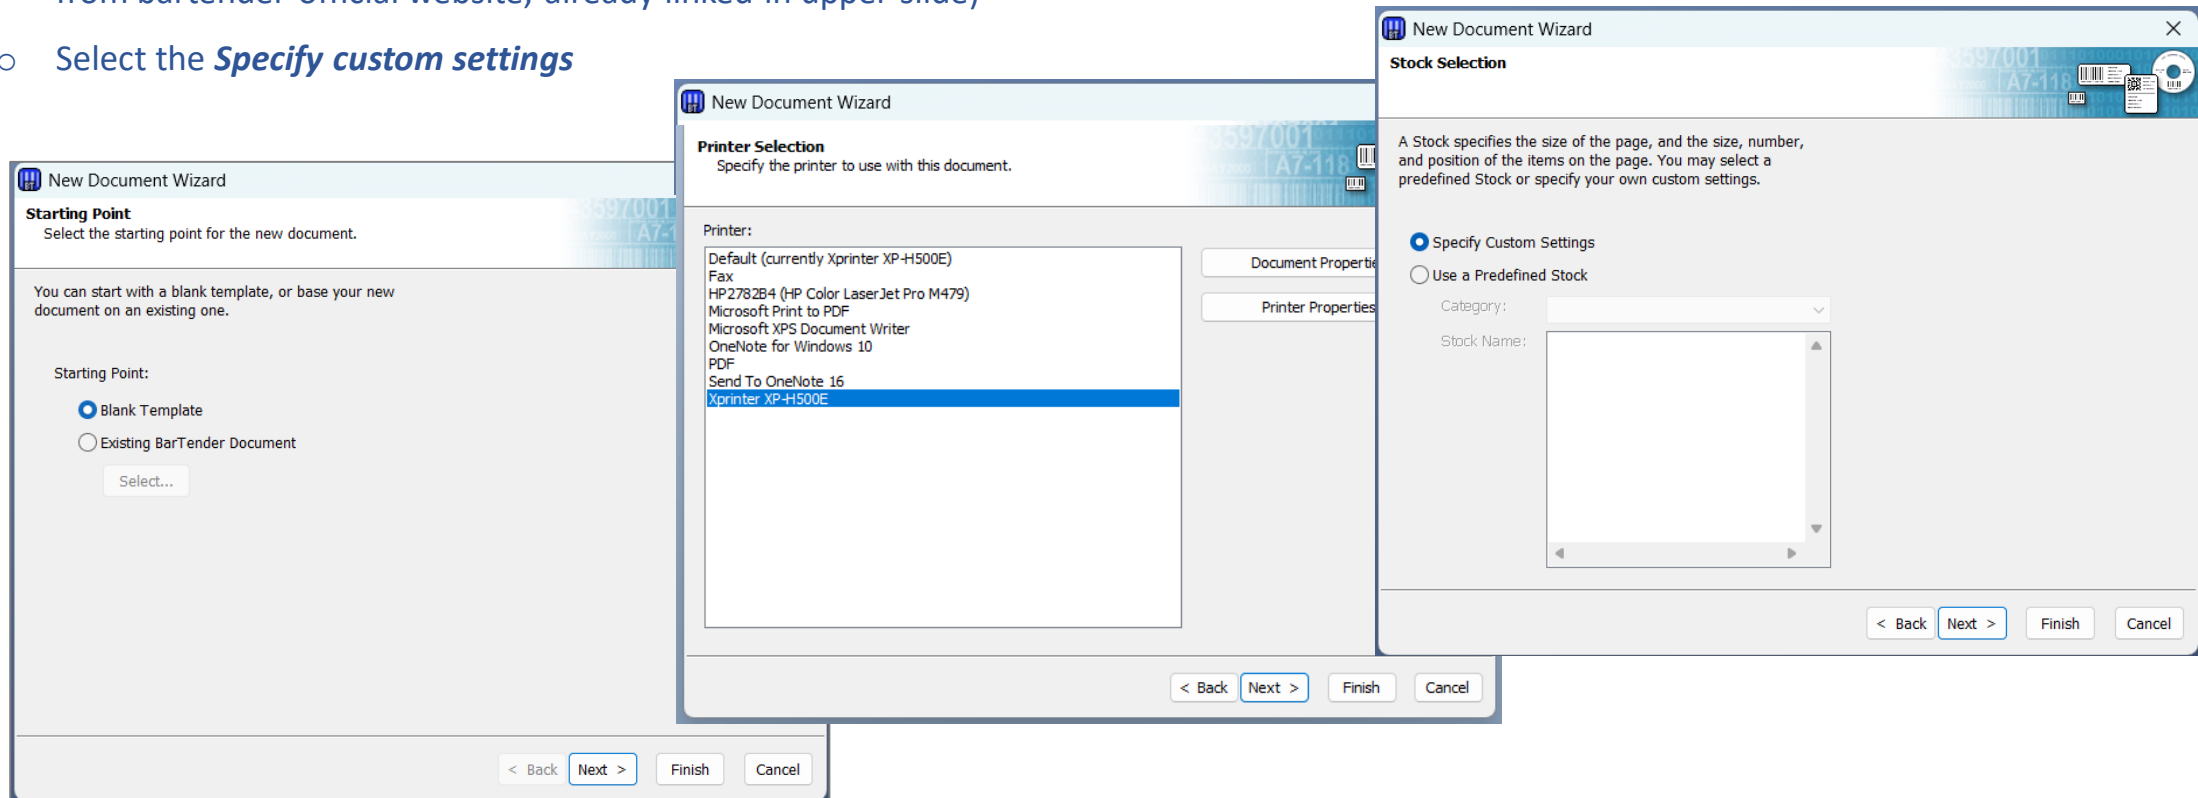

Xprinter XP-H500E

Create Label/ sticker template in Bartender:


- Select the **Multiple columns and rows** and add number and rows
- Select **Yes, it does have some unused material on the sides** > add the side gap value **2mm** or **0.078 inch** (unit will set in mm after complete of setup)
- Select your label size which you have created in printer preference

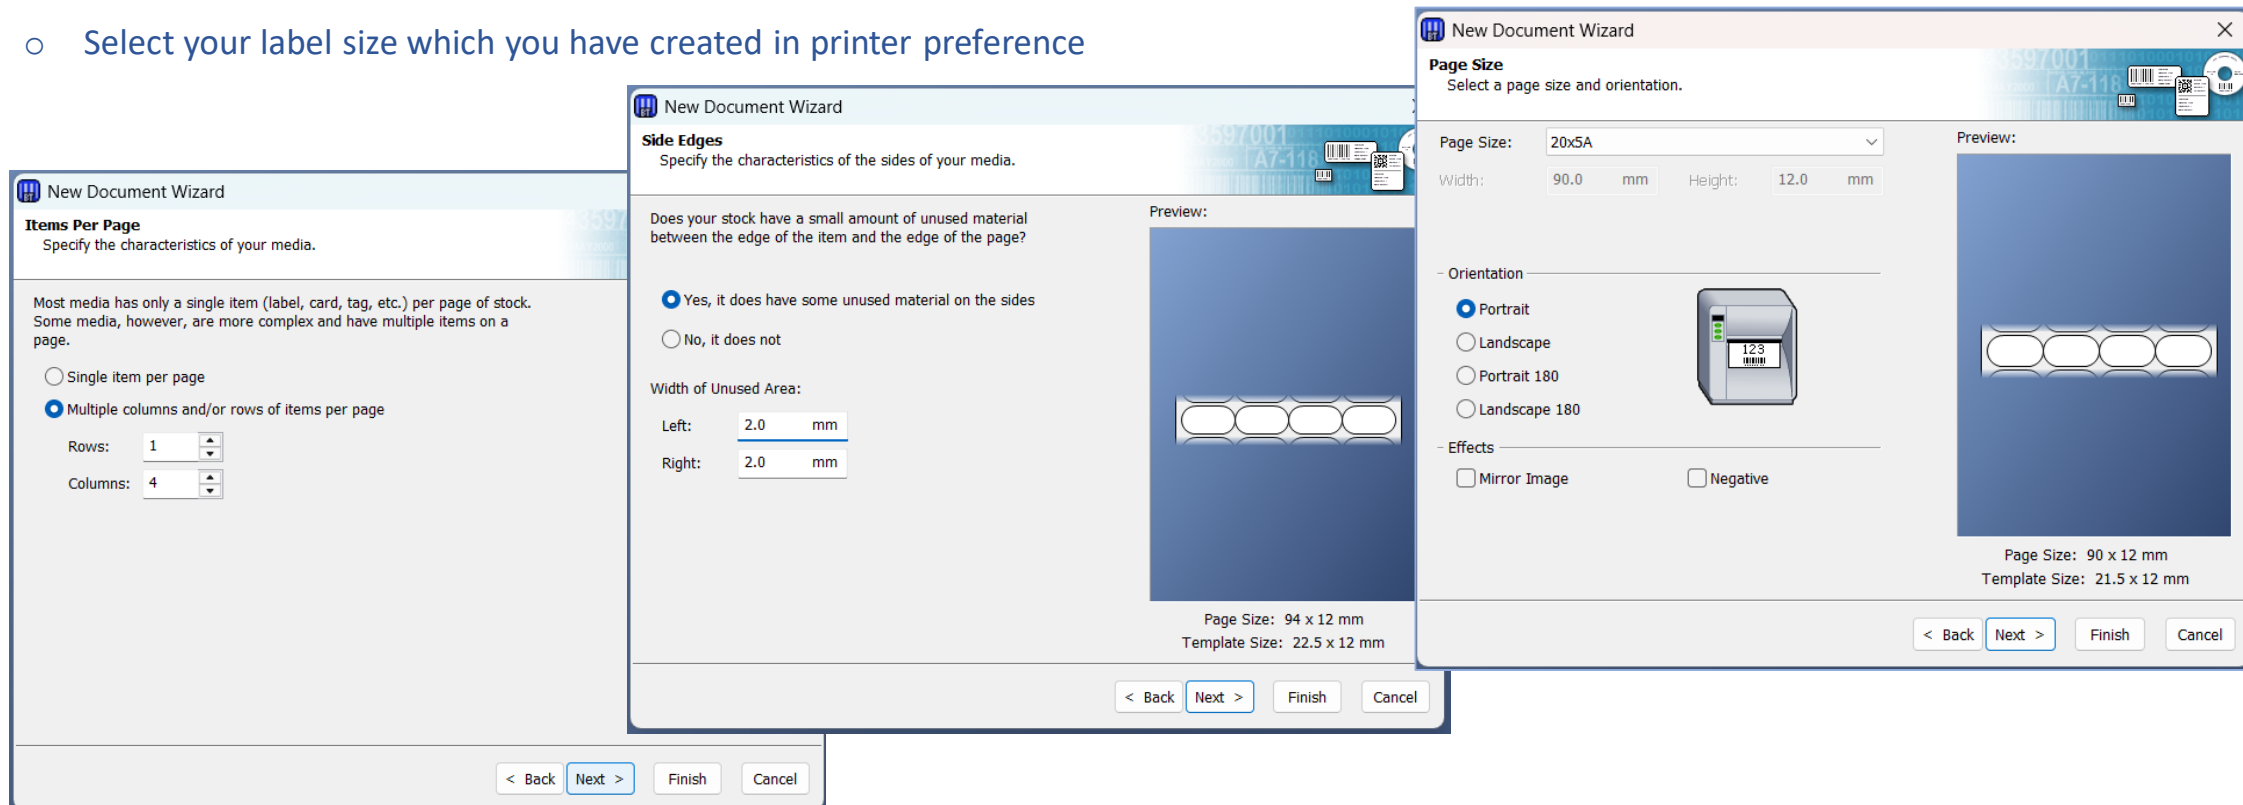

Xprinter XP-H500E

Create Label/ sticker template in Bartender:


- Select the shape *Rectangle* > *Template (label) width and height* > *horizontal gap* > *printing order*

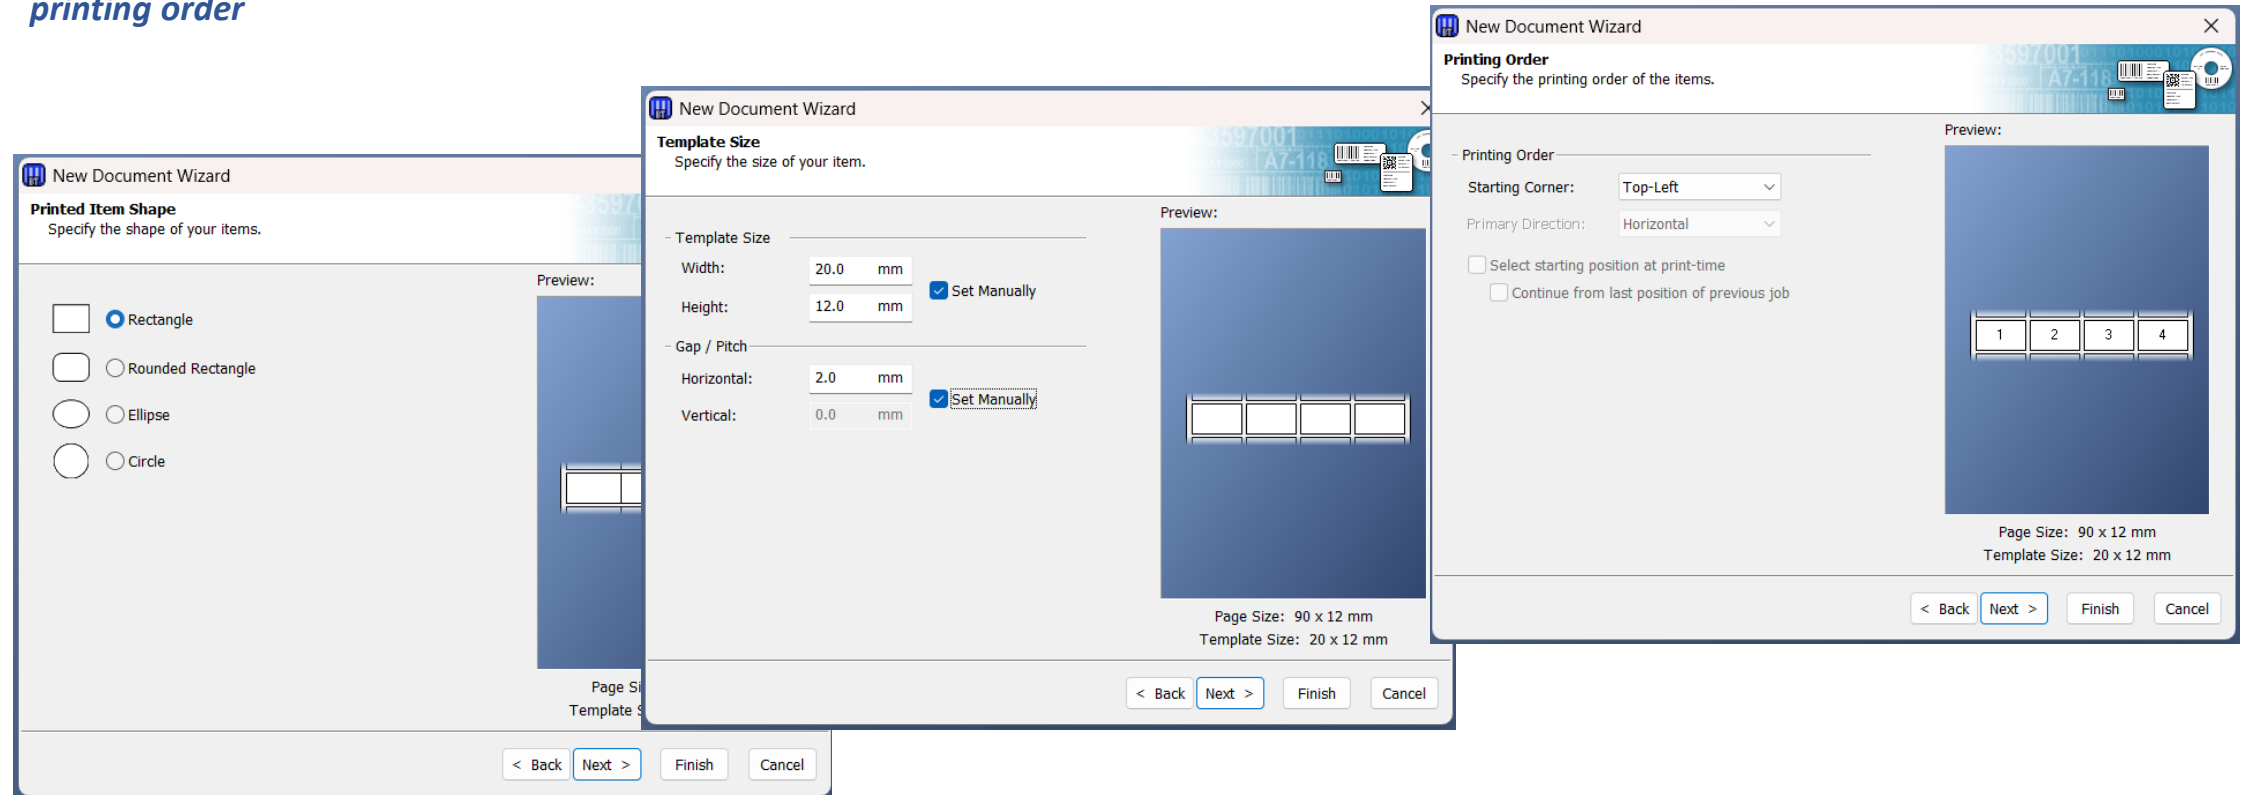

Xprinter XP-H500E

Create Label/ sticker template in Bartender:


- Uncheck all option if you not want to add background color > **review** your set values > **finished**

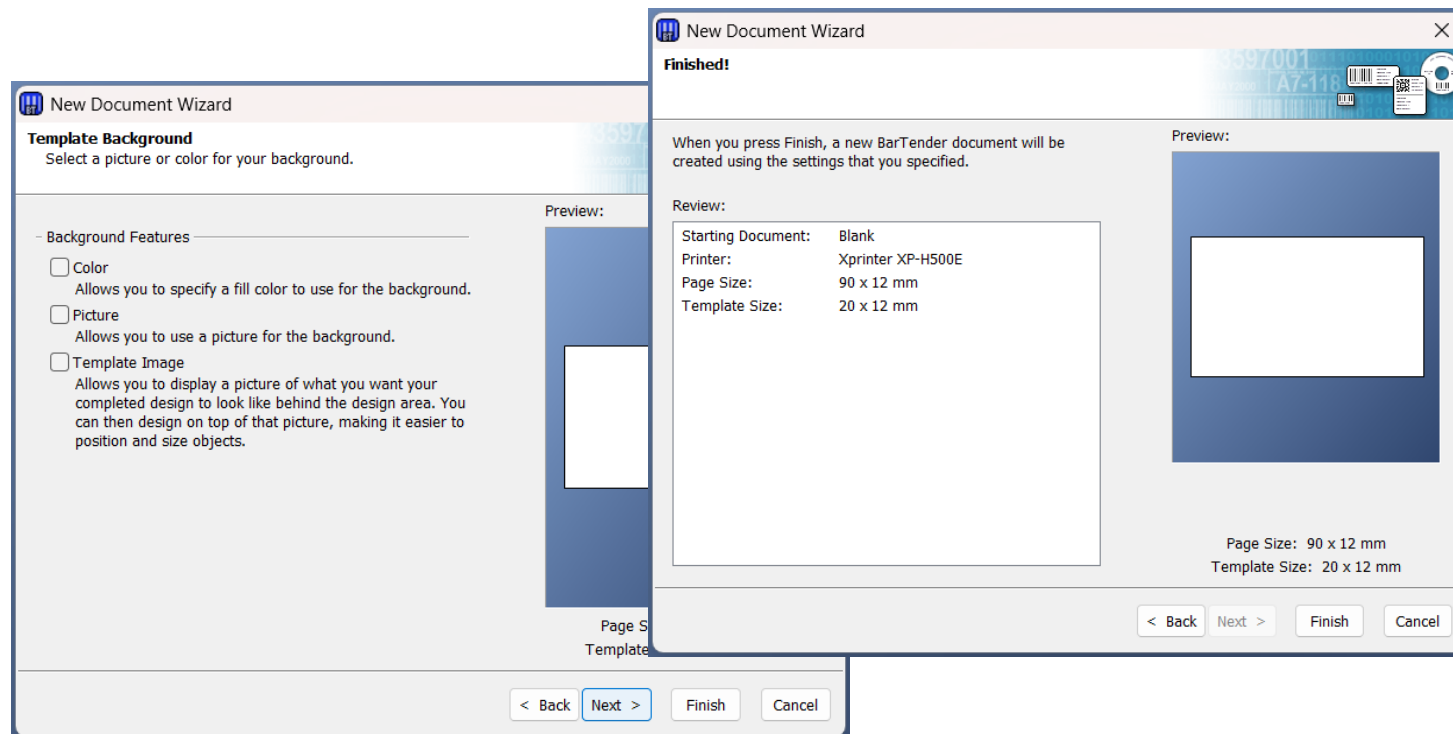

Xprinter XP-H500E

Print on Custom template:




- Add you **Text**, **bar code** or **image** > Save the template document, It will save in **.btw** extension
- To print your custom design label template, press the **Ctrl + P** or select print option
 - Select your template from **Document properties** > **20x5A** or other
 - In option select the **print speed** and **Darkness** as shown

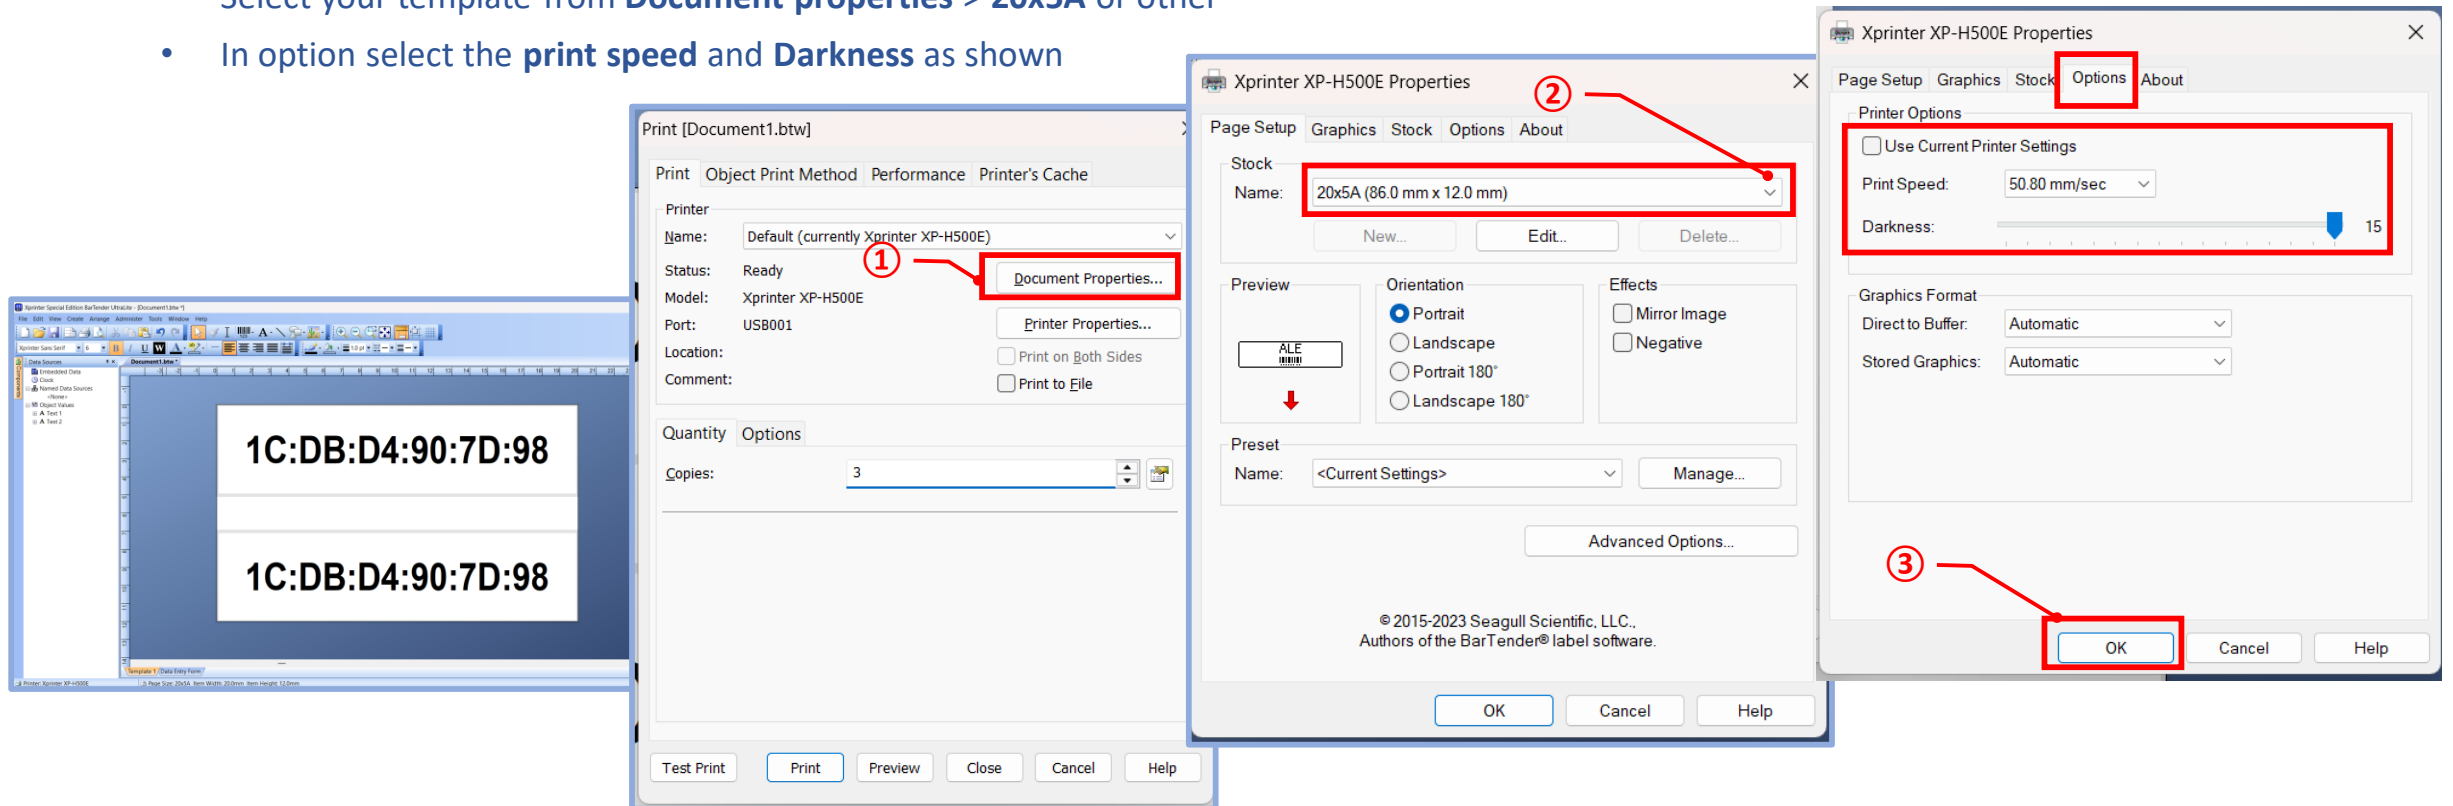

Xprinter XP-H500E

Print on Custom template:

- Select your number of copies for example I write 3
- Before printing, press the **Preview** button to review your document view then print it

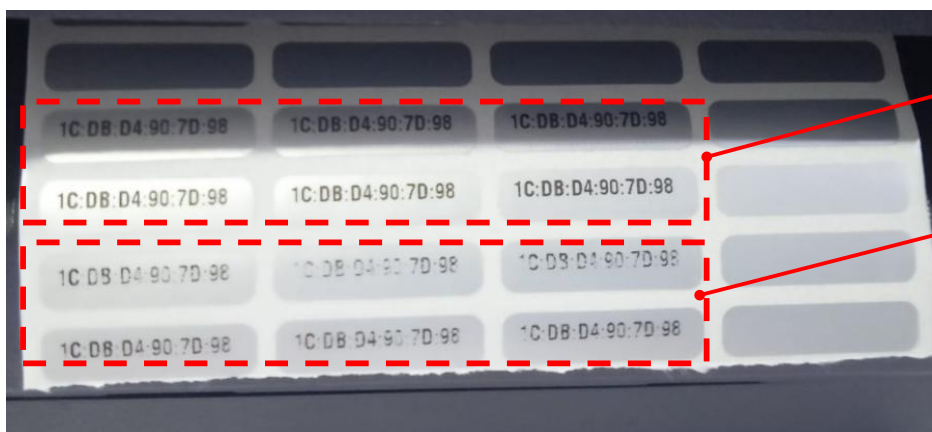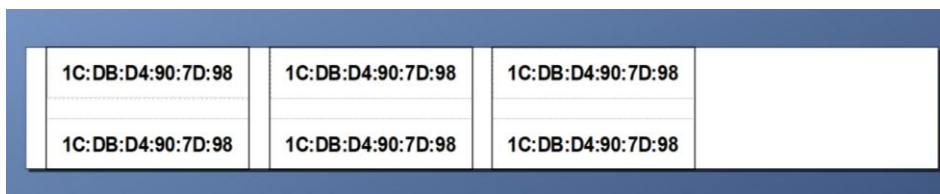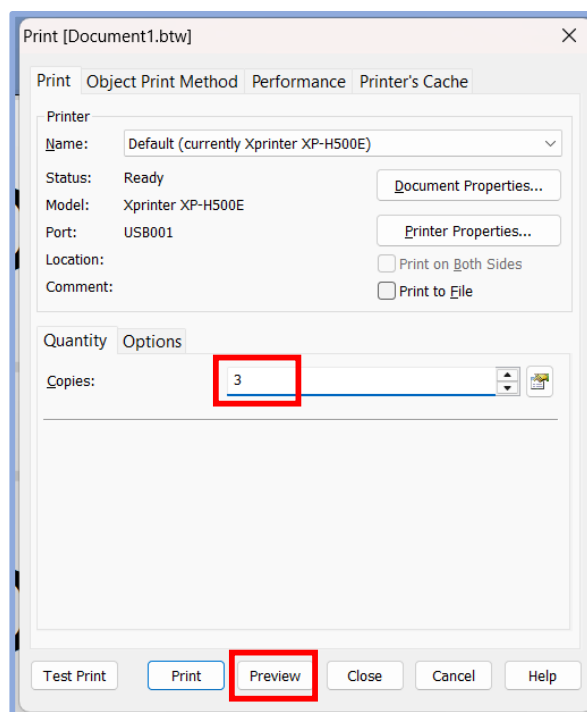

Xprinter XP-H500E

Help or further information:

- Material resource in market (**Rex City**) for Resin Ribbon

HafizPrinter
HAFIZ PRINTERS

Shop # 34 G, 3rd Gallery, Ground Floor, Rex City Faisalabad. Tel: 0336-6667139

No. **1679** **INVOICE** Date: **31-12-25**

M/S: Mob:

S#	Qty	Particulars	Rate	Amount
1)	1)	Risen Ribbon 110 x 300	2800/-	2800/-
			Total	2800/-
			Received	f
			Balance	

NO WARRANTY


Signature: 

BC-110300PRR Premium Resin Ribbon 110mm X 300m
Available at MB Communication



Product Information:
Black Copper Thermal Transfer Label
Ribbon Premium Resin 110mm by 300Meter
Resin ribbon use for glossy PET, Vinyl label roll printing
Compatible Printers: TSC TTP-244 Pro, TA210, ME240
Zebra GT820, ZT410, ZT420

BLACK COPPER
Upgrades network

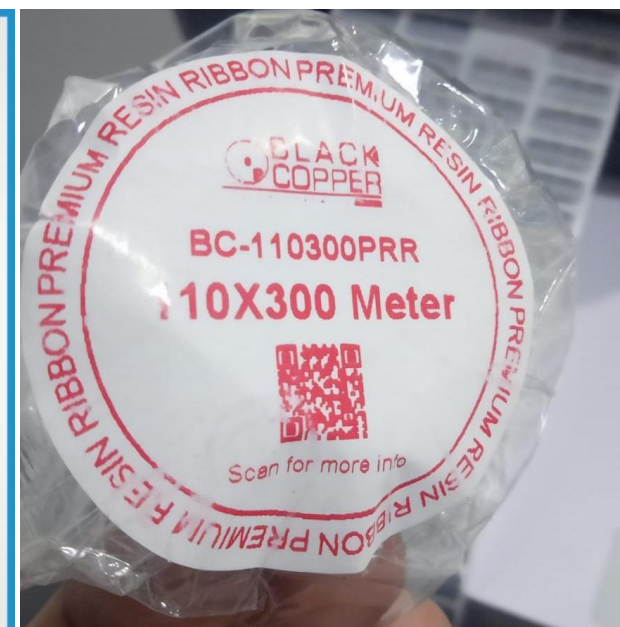

Xprinter XP-H500E

Help or further information:

If you face problem in printing or need help/more info

- Check out some label printing tutorials on YouTube
- Visit to market **REX city** resources for material use in printing

Thanks