

## Four Problems in Solid Geometry

Fix three non-coplanar rays from the origin in Cartesian 3-space,  $\vec{r}_1$ ,  $\vec{r}_2$  and  $\vec{r}_3$ . Let  $\alpha$  be the angle between  $\vec{r}_2$  and  $\vec{r}_3$ , let  $\beta$  be the angle between  $\vec{r}_3$  and  $\vec{r}_1$ , and let  $\gamma$  be the angle between  $\vec{r}_1$  and  $\vec{r}_2$ . The angles  $\alpha$ ,  $\beta$  and  $\gamma$  are each strictly between 0 and  $\pi$  (radians), and satisfy these four evident inequalities:  $\alpha + \beta + \gamma < 2\pi$ ,  $\alpha < \beta + \gamma$ ,  $\beta < \gamma + \alpha$  and  $\gamma < \alpha + \beta$ . Now, extend the three rays to obtain three lines,  $l_1$ ,  $l_2$  and  $l_3$ . Also fix three angles  $\angle A$ ,  $\angle B$  and  $\angle C$ , each strictly between 0 and  $\pi$ , whose sum is  $\pi$ . Consider the following two related problems:

**The Lines Problem:** Do there exist points  $A, B, C$  on  $l_1, l_2, l_3$ , respectively, such that the interior angles of the triangle  $ABC$  are  $\angle CAB = \angle A$ ,  $\angle ABC = \angle B$ ,  $\angle BCA = \angle C$ ?

**The Rays Problem:** (The same question, but further restrict  $A, B, C$  to be on the rays  $\vec{r}_1$ ,  $\vec{r}_2$  and  $\vec{r}_3$ , respectively.)

For each of these problems, we seek a system of relationships between the six quantities  $\angle A$ ,  $\angle B$ ,  $\angle C$ ,  $\alpha$ ,  $\beta$  and  $\gamma$  that provides necessary and sufficient conditions for answering the question. It turns out that these problems lead to quite different solutions depending on whether the triangle  $ABC$  is acute or obtuse. (Right triangles will be ignored here but can be dealt with as continuous limits in the acute triangle case.) Accordingly, let us divide the original two problems into four problems as follows:

**LA:** the Lines Problem when  $\angle A$ ,  $\angle B$ ,  $\angle C$  are all less than  $\pi/2$ .

**LO:** the Lines Problem when one of  $\angle A$ ,  $\angle B$ ,  $\angle C$  is greater than  $\pi/2$ .

**RA:** the Rays Problem when  $\angle A$ ,  $\angle B$ ,  $\angle C$  are all less than  $\pi/2$ .

**RO:** the Rays Problem when one of  $\angle A$ ,  $\angle B$ ,  $\angle C$  is greater than  $\pi/2$ .

By symmetry, for **LO** and **RO**, there is no loss in generality in assuming that  $\angle A$  is the obtuse angle. The **LA** problem has a trivial solution: there are no restrictions concerning the six quantities beyond those mentioned above. For each of the other three problems, a system is presented below that extensive experiments (using Mathematica and C++) strongly suggest solves the problem. Each such system is a logical combination of inequalities involving the six quantities. The system for **RA** has been proven to be necessary in order to obtain an affirmative answer, though it has not yet been proven to be sufficient. The systems presented for **LO** and **RO**, though based on considerable analysis, have not yet been rigorously established. Some preliminaries are needed before specifying the proposed system for each of the problems. Throughout, it will be helpful to let  $c_1 = \cos \alpha$ ,  $c_2 = \cos \beta$ ,  $c_3 = \cos \gamma$ ,  $C_0 = c_1 c_2 c_3$ ,  $C_1 = c_1^2$ ,  $C_2 = c_2^2$  and  $C_3 = c_3^2$ .

1. Consider a triangle  $A'B'C'$  in the Cartesian plane, having its vertices on the unit circle, and such that  $\angle C'A'B' = \angle A$ ,  $\angle A'B'C' = \angle B$ ,  $\angle B'C'A' = \angle C$ . Such a triangle is guaranteed to exist. Rotating this

triangle about the origin does not affect these properties, and we will assume that it is rotated in order to achieve the following additional property. Denote the coordinates of  $A'$ ,  $B'$  and  $C'$  by  $(x_1, y_1)$ ,  $(x_2, y_2)$  and  $(x_3, y_3)$ , respectively, with  $x_j = \cos \phi_j$  and  $y_j = \sin \phi_j$  for angles  $\phi_j$  ( $j = 1, 2, 3$ ). The extra requirement is that  $\phi_1 + \phi_2 + \phi_3 = 0$ . This is always possible, in several ways, in fact, and which of these is used is unimportant. Now define the following quantities:

$$\begin{aligned} L &= 2 [ (y_1 + y_2 + y_3)(1 - C_0) + (1 - x_1)y_1(C_1 - 1) + (1 - x_2)y_2(C_2 - 1) + (1 - x_3)y_3(C_3 - 1) ], \\ R &= 2 [ (1 + x_1 + x_2 + x_3)(1 - C_0) + (1 + x_1)x_1(C_1 - 1) + (1 + x_2)x_2(C_2 - 1) + (1 + x_3)x_3(C_3 - 1) ], \\ H &= 1 + 2C_0 - C_1 - C_2 - C_3, \quad K = -H - R, \\ D &= (K^2 + L^2 + 12HK + 9H^2)^2 - 4H(2K + 3H)^3. \end{aligned}$$

(The quantity  $D$  plays a crucial role in the analysis, and there are other ways to compute it.)

2. Still using the above notation, define the following quantities for the **LO** and **RO** problems:

$$\begin{aligned} j_2 &= (1 - C_2)(1 - C_3) x_2, \\ k_2 &= (1 - C_2)(1 - C_3) y_2, \\ m_2 &= (1 - C_3)(C_2 - \cos 2\angle B), \\ j_3 &= (1 - C_2)(1 - C_3) x_3, \\ k_3 &= (1 - C_2)(1 - C_3) y_3, \\ m_3 &= (1 - C_2)(C_3 - \cos 2\angle C), \\ q &= j_2^2 m_3^2 + k_2^2 m_3^2 + j_3^2 m_2^2 + k_3^2 m_2^2 - j_2^2 k_3^2 - j_3^2 k_2^2 \\ &\quad + 2j_2 k_2 j_3 k_3 - 2j_2 m_2 j_3 m_3 - 2k_2 m_2 k_3 m_3 \end{aligned}$$

(Note:  $\cos 2\angle B = \cos(\phi_1 - \phi_3)$  and  $\cos 2\angle C = \cos(\phi_1 - \phi_2)$ .)

3. Define these additional quantities for the **RO** problem:

$$\begin{aligned} \hat{c}_2 &= \text{sign}(c_1) \{ ( [ \cos(\phi_1 - \phi_2) - \cos(\phi_1 - \phi_3) ] C_1 + \cos(\phi_1 - \phi_3) - \cos(\phi_1 - \phi_2) \cos(\phi_2 - \phi_3) \\ &\quad + | \sin((\phi_2 - \phi_3)/2) | \sin(\phi_1 - \phi_2) [ 2 ( 1 + \cos(\phi_2 - \phi_3) - 2 C_1 ) ]^{1/2} ) \\ &\quad / ( 1 - C_1 + \cos(\phi_1 - \phi_2) C_1 - \cos(\phi_1 - \phi_2) \cos(\phi_2 - \phi_3) \\ &\quad + | \sin((\phi_2 - \phi_3)/2) | \sin(\phi_1 - \phi_2) [ 2 ( 1 + \cos(\phi_2 - \phi_3) - 2 C_1 ) ]^{1/2} ) \}^{1/2}, \end{aligned}$$

$$\begin{aligned}
\hat{c}_3 &= \{ ([\cos(\phi_1 - \phi_3) - \cos(\phi_1 - \phi_2)] C_1 + \cos(\phi_1 - \phi_2) - \cos(\phi_1 - \phi_3) \cos(\phi_2 - \phi_3) \\
&\quad + |\sin((\phi_2 - \phi_3)/2)| \sin(\phi_1 - \phi_3) [2(1 + \cos(\phi_2 - \phi_3) - 2C_1)]^{1/2}) \\
&\quad / (1 - C_1 + \cos(\phi_1 - \phi_3) C_1 - \cos(\phi_1 - \phi_3) \cos(\phi_2 - \phi_3) \\
&\quad + |\sin((\phi_2 - \phi_3)/2)| \sin(\phi_1 - \phi_3) [2(1 + \cos(\phi_2 - \phi_3) - 2C_1)]^{1/2}) \}^{1/2}, \\
\check{c}_2 &= \{ ([\cos(\phi_1 - \phi_2) - \cos(\phi_1 - \phi_3)] C_1 + \cos(\phi_1 - \phi_3) - \cos(\phi_1 - \phi_2) \cos(\phi_2 - \phi_3) \\
&\quad - |\sin((\phi_2 - \phi_3)/2)| \sin(\phi_1 - \phi_2) [2(1 + \cos(\phi_2 - \phi_3) - 2C_1)]^{1/2}) \\
&\quad / (1 - C_1 + \cos(\phi_1 - \phi_2) C_1 - \cos(\phi_1 - \phi_2) \cos(\phi_2 - \phi_3) \\
&\quad - |\sin((\phi_2 - \phi_3)/2)| \sin(\phi_1 - \phi_2) [2(1 + \cos(\phi_2 - \phi_3) - 2C_1)]^{1/2}) \}^{1/2}, \\
\check{c}_3 &= \text{sign}(c_1) \{ ([\cos(\phi_1 - \phi_3) - \cos(\phi_1 - \phi_2)] C_1 + \cos(\phi_1 - \phi_2) - \cos(\phi_1 - \phi_3) \cos(\phi_2 - \phi_3) \\
&\quad - |\sin((\phi_2 - \phi_3)/2)| \sin(\phi_1 - \phi_3) [2(1 + \cos(\phi_2 - \phi_3) - 2C_1)]^{1/2}) \\
&\quad / (1 - C_1 + \cos(\phi_1 - \phi_3) C_1 - \cos(\phi_1 - \phi_3) \cos(\phi_2 - \phi_3) \\
&\quad - |\sin((\phi_2 - \phi_3)/2)| \sin(\phi_1 - \phi_3) [2(1 + \cos(\phi_2 - \phi_3) - 2C_1)]^{1/2}) \}^{1/2}.
\end{aligned}$$

(When these quantities are required, it will always be possible to select a non-negative real radical whenever a radical is required, and this should always be done.)

Here now are the proposed solutions to each of the proposed problems, excluding the trivial **LA** problem. It is tacitly assumed here that the six quantities  $\angle A$ ,  $\angle B$ ,  $\angle C$ ,  $\alpha$ ,  $\beta$  and  $\gamma$  satisfy the properties indicated in the first paragraph of this document. Note that the four inequalities concerning  $\alpha$ ,  $\beta$  and  $\gamma$  are together equivalent to the single condition that  $H > 0$ .

### Proposed solution system for RA:

The question has an affirmative answer if and only if

$$\begin{aligned}
&[ \alpha < \angle A \rightarrow \cos \angle C \, c_2 + \cos \angle B \, c_3 > 0 ] \wedge \\
&[ \beta < \angle B \rightarrow \cos \angle A \, c_3 + \cos \angle C \, c_1 > 0 ] \wedge \\
&[ \gamma < \angle C \rightarrow \cos \angle B \, c_1 + \cos \angle A \, c_2 > 0 ] \wedge \\
&[ (\alpha < \angle A \wedge \beta > \angle B \wedge \gamma > \angle C) \rightarrow D < 0 ] \wedge \\
&[ (\alpha > \angle A \wedge \beta < \angle B \wedge \gamma > \angle C) \rightarrow D < 0 ] \wedge \\
&[ (\alpha > \angle A \wedge \beta > \angle B \wedge \gamma < \angle C) \rightarrow D < 0 ].
\end{aligned}$$

*Note:* the arrows mean logical implication and, of course,  $p \rightarrow q$  is logically equivalent to  $\neg p \vee q$ .

### Proposed solution system for LO:

The question has a negative answer if and only if

$$D < 0 \wedge [ q < 0 \vee ( 2 C_2 < 1 + \cos 2\angle B \wedge (1 + \cos 2\angle A) C_3 < \cos 2\angle A + \cos 2\angle C ) \vee \\ ( 2 C_3 < 1 + \cos 2\angle C \wedge (1 + \cos 2\angle A) C_2 < \cos 2\angle A + \cos 2\angle B ) ] .$$

### Proposed solution system for RO:

The question has a negative answer if and only if the **LO** question has a negative answer or one of the following hold:

- (i)  $c_1 < \cos \angle A \wedge [ c_2 > \cos \angle B \vee c_3 > \cos \angle C ] ;$
- (ii)  $c_1 > -\cos \angle A \wedge [ (c_2 < 0 \wedge c_3 < \cos \angle C) \vee (c_3 < 0 \wedge c_2 < \cos \angle B) \\ \vee (c_2 < \cos \angle B \wedge c_3 < \cos \angle C \wedge D > 0) ] ;$
- (iii)  $\cos \angle A < c_1 < -\cos \angle A \wedge [ ( \cos \angle C c_2 + \cos \angle B c_3 < 0 ) \vee ( c_2 < \hat{c}_2 \wedge c_3 < \hat{c}_3 ) \vee \\ ( c_2 < \check{c}_2 \wedge c_3 < \check{c}_3 ) \vee ( c_2 < \hat{c}_2 \wedge c_3 < \cos \angle C \wedge D > 0 ) \vee \\ ( c_3 < \check{c}_3 \wedge c_2 < \cos \angle B \wedge D > 0 ) ] .$

The next few pages contain some figures that show typical experimental results, using Mathematica. Each figure deals with one of the non-trivial problems, using some chosen triangle angles  $\angle A$ ,  $\angle B$  and  $\angle C$ , together with a chosen value of  $\gamma$  (and corresponding value of  $c_3$ ). Two regions are plotted in the  $(c_1, c_2)$  – plane. The first of these regions (blue) is produced by generating pairs/points  $(c_1, c_2)$  that correspond to the values of  $\alpha$  and  $\beta$  that occur when a suitable triangle  $ABC$  is fit into three lines (or rays) using the given  $\gamma$ . Two of these lines (or rays) stay fixed, while the other one varies. An extension of the method of John Sullivan, as discussed by John Wetzel\*, is used here to generate these points. The second of the two region (yellow) is where the proposed solution system for the problem yields a negative answer. Together, these two regions always appear to partition the interior of the ellipse given by  $H > 0^\dagger$  (for fixed  $c_3$ ), except possibly for a set of measure zero. Many such plots have been generated, lending support for the claim that the proposed solutions to **LO**, **RA** and **RO** are correct.

After laboring for quite a long time on these three problems, I will be very surprised if any fundamental flaw is discovered in the proposed solutions, or if any significantly simpler solution is discovered that does not involve solving polynomial equations of degree greater than two (as in the P3P problem). Notice that the proposed solutions to **LO** and **RA** can be expressed as logical combinations of polynomial inequalities in  $c_1$ ,  $c_2$  and  $c_3$ , without explicit mention of  $\alpha$ ,  $\beta$  and  $\gamma$ . There is no need to extract roots in these systems. On the other hand, the proposed solution to **RO** does require computing square roots. However, it might be possible to find a different solution that avoids this.


\* “An Ancient Elliptic Locus”

<sup>†</sup> which is equivalent to  $(\alpha + \beta + \gamma < 2\pi) \wedge (\alpha < \beta + \gamma) \wedge (\beta < \gamma + \alpha) \wedge (\gamma < \alpha + \beta)$


*Note:*  $\gamma$  is called  $\phi$  in the figures (due to my notation for extending Sullivan's method). Also, the different shades of blue are unimportant for our purposes here. The red curves are the  $D = 0$  curves.

### Examples of RA


side lengths: 2.74 2.00 3.00  
 interior angles:  $0.349\pi$   $0.225\pi$   $0.426\pi$   
 acute,  $\phi = 0.377\pi$ ,  $\cos \phi = 0.377$

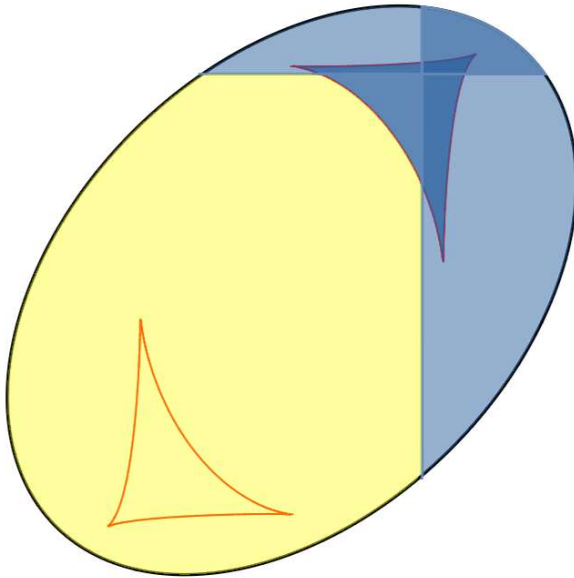


side lengths: 2.74 2.00 3.00  
 interior angles:  $0.349\pi$   $0.225\pi$   $0.426\pi$   
 acute,  $\phi = 0.420\pi$ ,  $\cos \phi = 0.250$

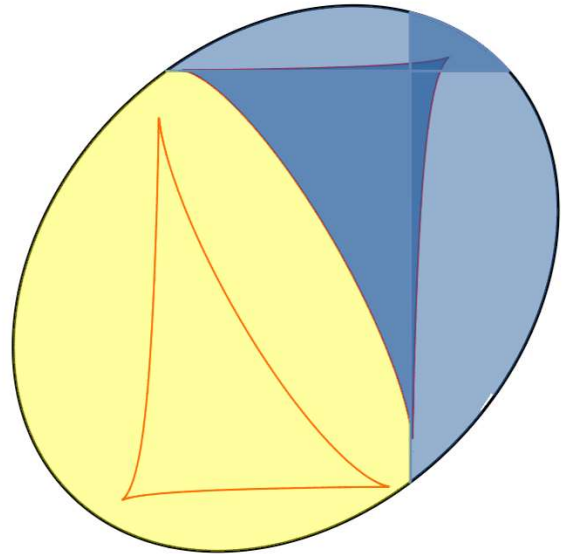

side lengths: 2.74 2.00 3.00  
 interior angles:  $0.349\pi$   $0.225\pi$   $0.426\pi$   
 acute,  $\phi = 0.462\pi$ ,  $\cos \phi = 0.121$

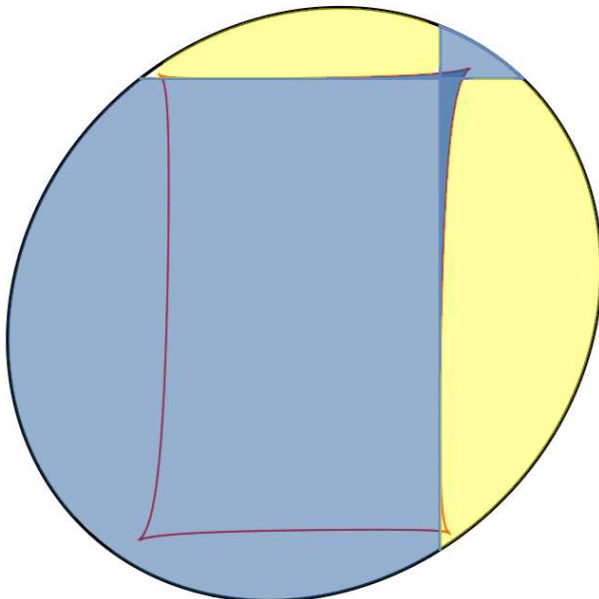


side lengths: 2.74 2.00 3.00  
 interior angles:  $0.349\pi$   $0.225\pi$   $0.426\pi$   
 acute,  $\phi = 0.608\pi$ ,  $\cos \phi = -0.333$

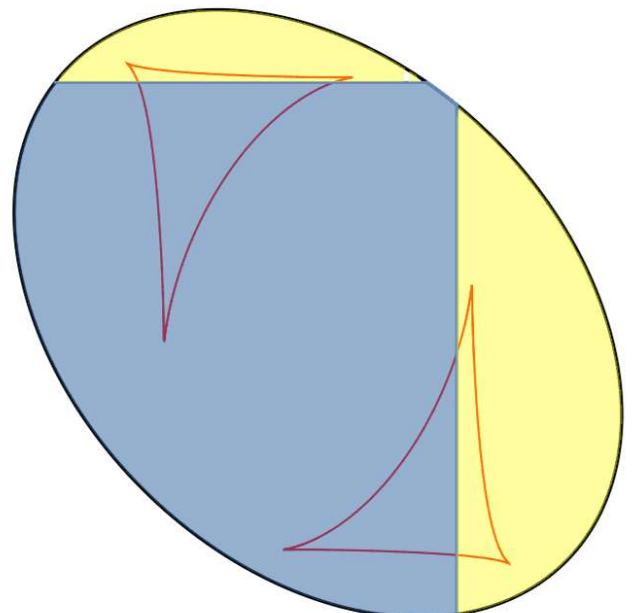


## Examples of LO


side lengths: 1.81 2.00 3.00  
interior angles:  $0.200\pi$   $0.224\pi$   $0.576\pi$   
obtuseC,  $\phi = 0.425\pi$ ,  $\cos \phi = 0.235$

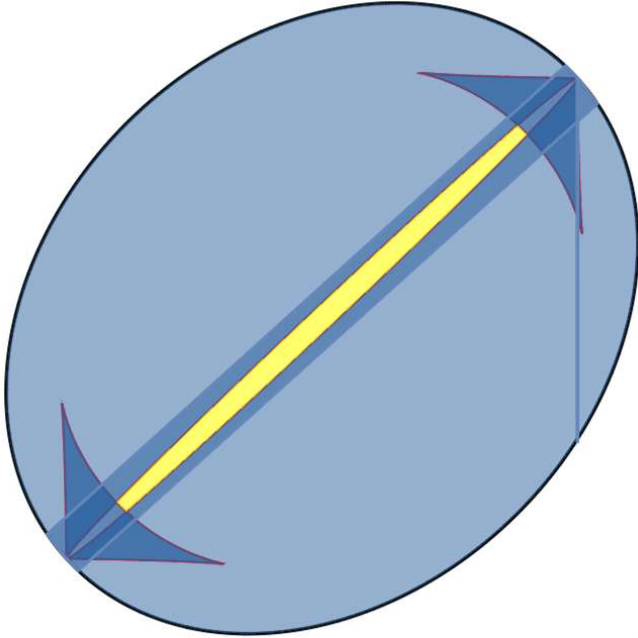


side lengths: 1.81 2.00 3.00  
interior angles:  $0.200\pi$   $0.224\pi$   $0.576\pi$   
obtuseC,  $\phi = 0.500\pi$ ,  $\cos \phi = 0$

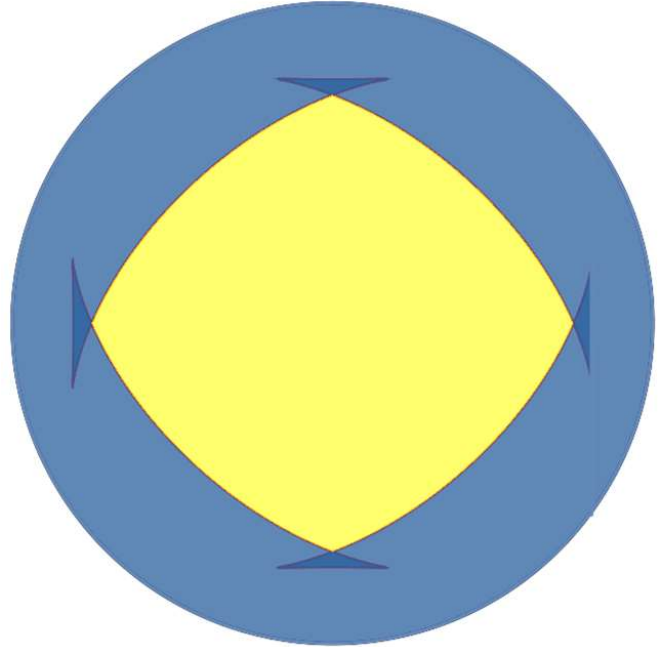

side lengths: 1.27 2.00 3.00  
interior angles:  $0.101\pi$   $0.165\pi$   $0.734\pi$   
obtuseC,  $\phi = 0.379\pi$ ,  $\cos \phi = 0.372$

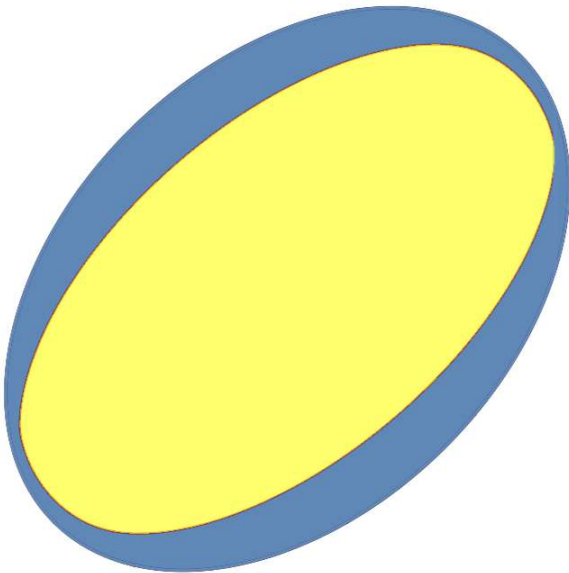


side lengths: 3.88 2.00 3.00  
interior angles:  $0.554\pi$   $0.170\pi$   $0.276\pi$   
obtuseA,  $\phi = 0.379\pi$ ,  $\cos \phi = 0.372$

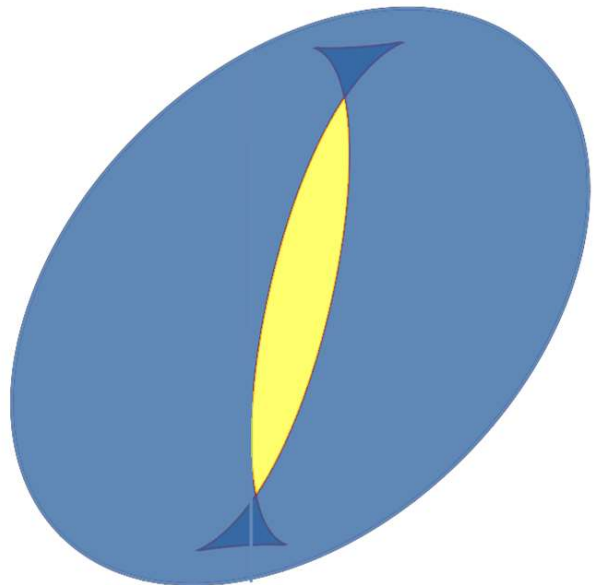


## Examples of RO


side lengths: 1.81 2.00 3.00  
 interior angles:  $0.200\pi$   $0.224\pi$   $0.576\pi$   
 obtuseC ,  $\phi = 0.430\pi$ ,  $\cos \phi = 0.217$

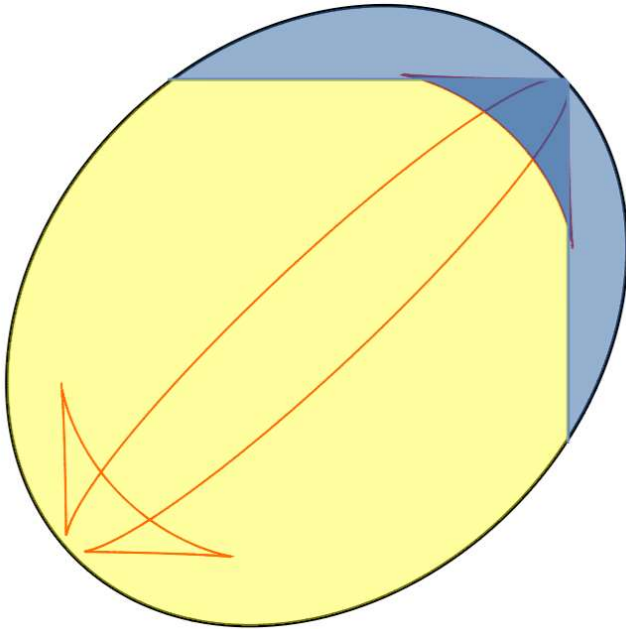

side lengths: 1.81 2.00 3.00  
 interior angles:  $0.200\pi$   $0.224\pi$   $0.576\pi$   
 obtuseC ,  $\phi = 0.500\pi$ ,  $\cos \phi = 0$

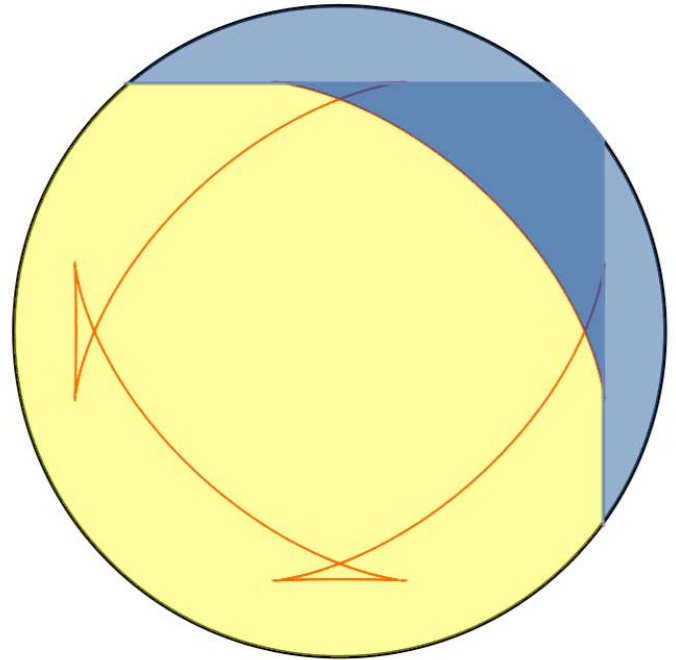

side lengths: 1.81 2.00 3.00  
 interior angles:  $0.200\pi$   $0.224\pi$   $0.576\pi$   
 obtuseC ,  $\phi = 0.575\pi$ ,  $\cos \phi = -0.233$

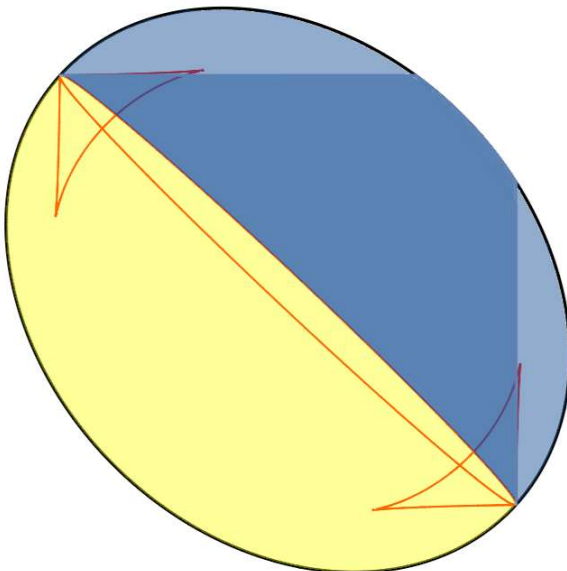

side lengths: 1.81 2.00 3.00  
 interior angles:  $0.200\pi$   $0.224\pi$   $0.576\pi$   
 obtuseC ,  $\phi = 0.598\pi$ ,  $\cos \phi = -0.304$

