## ALM-32220

1.7GHz - 2.7GHz

2 Watt High Linearity Amplifier

# AVAGO

# **Data Sheet**

## **Description**


Avago Technologies' ALM-32220 is a high linearity 2 Watt PA with good OIP3 performance and exceptionally good PAE at 1dB gain compression point, achieved through the use of Avago Technologies' proprietary 0.25um GaAs Enhancement-mode pHEMT process.

All matching components are fully integrated within the module. This makes the ALM-32220 extremely easy to use. The adjustable temperature-compensated internal bias circuit allows the device to be operated at either class A or class AB operation. The ALM-32220 is housed inside a miniature 7.0 x 10.0 x 1.1 mm<sup>3</sup> 20-lead multiple-chips-on-board (MCOB) module package.

## **Component Image**

7.0 x 10.0 x 1.1 mm<sup>3</sup> 20-Lead MCOB Package

#### 7.0 x 10.0 x 1.1 mm<sup>3</sup> 20-Lead MCOB Package



**Top View** 

**Bottom View** 

#### Notes:

Package marking provides orientation and identification "32220" = Device Part Number "WWYY" = Work week and year of manufacture

"XXXX" = Last 4 digit of lot number

#### **Features**

- Fully matched, input and output
- High linearity and P1dB
- Unconditionally stable across load condition
- Built-in adjustable temperature compensated internal bias circuitry
- GaAs E-pHEMT Technology<sup>[1]</sup>
- 5V supply
- Excellent uniformity in product specifications
- Tape-and-Reel packaging option available
- MSL-3 and Lead-free
- High MTTF for base station application

#### **Specifications**

2GHz; 5V, 800mA (typical)

- 14.8 dB Gain
- 50.0 dBm Output IP3
- 34.4 dBm Output Power at 1dB gain compression
- 47.5% PAE at P1dB
- 3.5dB Noise Figure

#### **Applications**

- Class A driver amplifier for GSM/PCS/W-CDMA/WiMAX Base Stations.
- General purpose gain block.

#### Note

 Enhancement mode technology employs positive gate voltage, thereby eliminating the need of negative gate voltage associated with conventional depletion mode devices.



Attention: Observe precautions for handling electrostatic sensitive devices.

ESD Machine Model = 200 V ESD Human Body Model = 1000 V Refer to Avago Application Note A004R: Electrostatic Discharge, Damage and Control.

## Absolute Maximum Rating [1] T<sub>A</sub>=25°C

Symbol	Parameter	Units	Absolute Max.
$V_{dd,max}$	Device Voltage, RF output to ground	V	5.5
I <sub>ds,max</sub>	Device Drain Current	mA	1500
V <sub>ctrl,max</sub>	Control Voltage	V	5.5
P <sub>in,max</sub>	CW RF Input Power	dBm	28
P <sub>diss</sub>	Total Power Dissipation [3]	W	8.25
T <sub>j, max</sub>	Junction Temperature	°C	150
T <sub>STG</sub>	Storage Temperature	°C	-65 to 150

# Thermal Resistance [2] $\theta_{jc} = 14 \text{ °C/W}$ (Vdd=5, Ids=800mA, Tc=85°C)

#### Notes:

- 1. Operation of this device in excess of any of these limits may cause permanent damage.
- 2. Thermal resistance measured using Infra-Red measurement technique.
- 3. This is limited by maximum Vdd and lds. Derate 71.4mW/ °C for Tc> 34.5 °C.

## Product Consistency Distribution Charts<sup>[4]</sup>




Figure 1. Ids; LSL = 690mA, nominal = 800mA, USL = 910mA




Figure 3. P1dB; LSL = 33dBm, nominal = 34.4dBm

LSL



CPK = 2.943 Std Dev = 0.147

15 15.5

USL

16 16.5

Figure 5. Gain; LSL=13.5dB, Nominal = 14.8dB, USL=16.8dB

14 14.5




Figure 2. OIP3; LSL = 48dBm, nominal = 50dBm




Figure 4. PAE at P1dB; nominal = 47.5%

#### Note:

13 13.5

- 4. Distribution data sample size is 500 samples taken from 3 different wafer lots.  $T_A = 25^{\circ}C$ ,  $V_{A} = 5V$ ,
- 5. Measurements are made on a production test board. Input trace losses have not been de-embedded from actual measurements.

17

# Electrical Specifications [1]

 $T_A = 25$  °C, Vdd =5V, Vctrl =5V, RF performance at 2GHz, measured on demo board (see Figure 7) unless otherwise specified.

Parameter and Test Condition	Units	Min.	Тур.	Max.
Quiescent current	mA	690	800	910
Vctrl current	mA	-	11	-
Gain	dB	13.5	14.8	16.8
Output Third Order Intercept Point	dBm	48	50	-
Output Power at 1dB Gain Compression	dBm	33.0	34.4	-
Power Added Efficiency	%	-	47.5	-
Noise Figure (Typ.Vctrl=5.0V)	dB	-	3.5	-
Input Return Loss, 50Ω source	dB	-	-9.0	-
Output Return Loss, $50\Omega$ load	dB	-	-9.0	-
Reverse Isolation	dB	-	-30	-
	Quiescent current  Vctrl current  Gain  Output Third Order Intercept Point  Output Power at 1dB Gain Compression  Power Added Efficiency  Noise Figure (Typ.Vctrl=5.0V)  Input Return Loss, 50Ω source  Output Return Loss, 50Ω load	Quiescent current       mA         Vctrl current       mA         Gain       dB         Output Third Order Intercept Point       dBm         Output Power at 1dB Gain Compression       dBm         Power Added Efficiency       %         Noise Figure (Typ.Vctrl=5.0V)       dB         Input Return Loss, 50Ω source       dB         Output Return Loss, 50Ω load       dB	Quiescent current       mA       690         Vctrl current       mA       -         Gain       dB       13.5         Output Third Order Intercept Point       dBm       48         Output Power at 1dB Gain Compression       dBm       33.0         Power Added Efficiency       %       -         Noise Figure (Typ.Vctrl=5.0V)       dB       -         Input Return Loss, 50Ω source       dB       -         Output Return Loss, 50Ω load       dB       -	Quiescent current       mA       690       800         Vctrl current       mA       -       11         Gain       dB       13.5       14.8         Output Third Order Intercept Point       dBm       48       50         Output Power at 1dB Gain Compression       dBm       33.0       34.4         Power Added Efficiency       %       -       47.5         Noise Figure (Typ.Vctrl=5.0V)       dB       -       3.5         Input Return Loss, 50Ω source       dB       -       -9.0         Output Return Loss, 50Ω load       dB       -       -9.0

#### Notes:

- 1. Measurements at 2GHz obtained using demo board described in Figure 6 and 7.
- 2. OIP3 test condition:  $F_{RF1} F_{RF2} = 10 MHz$  with input power of -5dBm per tone measured at worst side band
- 3. Use proper biasing, heat sink and de-rating to ensure maximum channel temperature is not exceeded. See absolute maximum ratings and application note (if applicable) for more details.

S-Parameter [1] (Vdd = 5V, Vctrl = 5V, T = 25°C, matched  $50\Omega$ )


Freq (GHz)	S11 (dB)	S11 (ang)	S21 (dB)	S21 (ang)	S12 (dB)	S12 (ang)	S22 (dB)	S22 (ang)
0.1	-0.12	167.05	-72.88	-39.59	-71.31	25.90	-0.14	-175.93
0.2	-0.17	154.51	-66.14	-158.67	-81.47	113.84	-0.21	162.14
0.3	-0.22	141.94	-54.09	133.83	-83.30	142.58	-0.27	144.44
0.4	-0.27	129.27	-42.75	82.54	-82.65	25.72	-0.32	128.65
0.5	-0.31	116.37	-36.01	46.13	-81.29	-2.31	-0.37	113.24
0.6	-0.36	103.12	-30.60	22.23	-77.95	-26.99	-0.42	97.62
0.7	-0.40	89.42	-24.80	-0.29	-74.29	-51.86	-0.49	81.41
0.8	-0.46	75.11	-19.48	-23.43	-69.46	-78.75	-0.58	64.21
0.9	-0.52	59.95	-14.26	-47.47	-64.39	-104.61	-0.72	45.51
1.0	-0.62	43.63	-9.03	-73.73	-58.93	-131.78	-0.99	24.59
1.1	-0.79	25.71	-3.80	-103.65	-53.26	-160.90	-1.52	0.54
1.2	-1.09	5.58	1.30	-138.69	-47.63	165.38	-2.60	-27.56
1.3								
	-1.63	-17.59	5.96	-179.54	-42.41	126.02	-4.63	-59.95
1.4	-2.80	-49.13	10.24	128.61	-37.50	76.05	-8.36	-101.83
1.5	-4.88	-85.12	12.97	79.36	-34.22	28.25	-12.17	-149.98
1.6	-8.64	-135.16	14.60	29.33	-32.08	-20.60	-13.91	147.00
1.7	-12.43	151.26	15.17	-18.76	-31.04	-67.80	-12.65	83.78
1.8	-12.86	72.48	15.03	-62.58	-30.80	-110.89	-10.60	35.03
.9	-10.82	15.65	14.63	-101.86	-30.88	-149.49	-9.50	-2.71
2.0	-9.55	-22.12	14.24	-137.94	-30.97	175.02	-9.24	-35.61
2.1	-9.33	-53.81	13.97	-172.34	-30.97	141.10	-9.53	-66.92
2.2	-9.87	-84.59	13.80	153.80	-30.88	107.62	-10.13	-98.77
2.3	-11.08	-117.80	13.66	119.80	-30.77	73.84	-10.81	-132.83
2.4	-12.82	-157.62	13.49	85.33	-30.69	39.45	-11.26	-170.10
2.5	-14.28	151.74	13.20	50.34	-30.73	4.36	-11.15	150.06
2.6	-14.07	94.58	12.75	15.04	-30.94	-31.18	-10.40	109.90
2.7	-12.18	42.86	12.12	-20.16	-31.33	-66.74	-9.27	71.72
2.8	-10.02	1.82	11.35	-54.87	-31.85	-101.95	-8.11	36.49
2.9	-8.46	-31.95	10.53	-88.93	-32.42	-136.65	-7.17	3.96
3.0	-7.63	-62.00	9.76	-122.65	-32.93	-171.22	-6.53	-26.60
3.1	-7.58	-90.50	9.15	-156.82	-33.29	153.55	-6.23	-56.10
3.2	-8.60	-119.31	8.74	167.14	-33.44	116.26	-6.32	-85.65
3.3	-12.27	-151.73	8.45	127.18	-33.46	74.80	-6.90	-117.01
3.4	-18.53	116.33	7.94	81.10	-33.69	26.96	-8.15	-154.18
3.5	-16.10	1.49	6.52	28.43	-34.77	-27.86	-10.02	152.45
3.6	-7.18	-65.40	3.48	-27.36	-34.77	-86.28	-10.02	77.07
3.7	-3.72	-97.57		-79.83	-41.67			
			-1.29 -7.21		-46.96	-141.89	-8.12	1.80
3.8	-2.28	-123.55		-124.21		170.25	-5.17	-51.70
3.9	-1.56	-147.17	-14.31	-163.92	-53.10	126.90	-3.22	-92.25
1.0	-1.24	-164.84	-20.56	167.75	-58.09	96.38	-2.32	-119.49
1.1	-1.06	179.56	-26.60	143.99	-62.44	71.41	-1.80	-141.97
1.2	-0.94	165.36	-32.42	123.38	-66.05	50.40	-1.48	-161.39
1.3	-0.86	152.19	-38.05	104.98	-68.88	33.27	-1.27	-178.69
1.4	-0.80	139.80	-43.54	88.20	-71.02	19.99	-1.13	165.54
1.5	-0.76	127.98	-48.92	72.49	-72.27	9.22	-1.03	150.91
4.6	-0.73	116.61	-54.23	57.03	-73.27	-0.11	-0.96	137.18
1.7	-0.71	105.59	-59.32	40.69	-74.09	-11.00	-0.90	124.15
4.8	-0.69	94.84	-64.09	21.68	-73.99	-23.90	-0.86	111.68
1.9	-0.68	84.29	-68.17	-0.97	-73.51	-35.51	-0.83	99.66
5.0	-0.68	73.89	-71.08	-27.44	-73.12	-50.12	-0.81	87.99
5.1	-0.68	63.60	-72.64	-52.75	-73.02	-64.79	-0.79	76.60
5.2	-0.68	53.36	-72.71	-75.04	-72.84	-75.81	-0.78	65.42
5.3	-0.68	43.12	-72.21	-93.36	-72.23	-87.59	-0.77	54.39
5.4	-0.69	32.87	-71.69	-109.91	-71.73	-103.98	-0.77	43.48
5.5	-0.70	22.57	-70.99	-123.52	-71.21	-118.95	-0.77	32.63
5.6	-0.72	12.17	-70.50	-136.61	-70.94	-133.97	-0.78	21.79
5.7	-0.74	1.67	-70.30	-151.08	-70.62	-145.93	-0.78	10.94
5.8	-0.76	-8.98	-69.59	-161.98	-70.28	-156.21	-0.79	0.04
5.9	-0.78	-19.79	-68.40	-173.74	-69.09	-169.51	-0.79	-10.92
		-30.78	-67.44			173.43		-10.92
6.0	-0.80	-3U./ő	-07.44	170.18	-67.88	1/3.43	-0.82	-21.98

#### Notes:

<sup>1.</sup> S-parameter is measured with reference plane at SMA end launch using demo board shown in Figure 7.

<sup>2.</sup> Demo board  $50\Omega$  transmission line is CPWG with W = 21.7 mils, G = 19.2 mils, L = 615.5 mils, 10 mils Rogers RO4350, 0.5oz Cu.

<sup>3.</sup> Demo board SMA end launch is Johnson 142-0701-851.

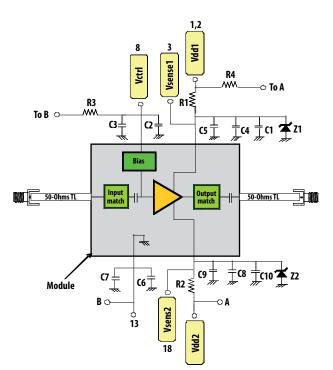

Circuit Symbol	Size	Value	Description
C1, C10	0805	2.2uF	Ceramic Chip Capacitor
C2, C4, C9	0402	0.1uF	Ceramic Chip Capacitor
C3, C5, C8	0402	10nF	Ceramic Chip Capacitor
C6, C7	0402	Not Used	N/A
R1, R2	1206	0 Ohm	Chip Resistor
R3	0402	Not Used	N/A
R4	0805	0 Ohm	Chip Resistor
Z1, Z2	0805	Optional	Zener Diode 5.6V (Optional)

Note:

To supply Vdd1 and Vdd2 individually, remove R4 and supply Vdd1 from pin 1,2 and Vdd2 from pin 19,20  $\,$ 

Figure 6. Demo board application schematics and components table

# DC Pin Configuration of 20-pin Connector

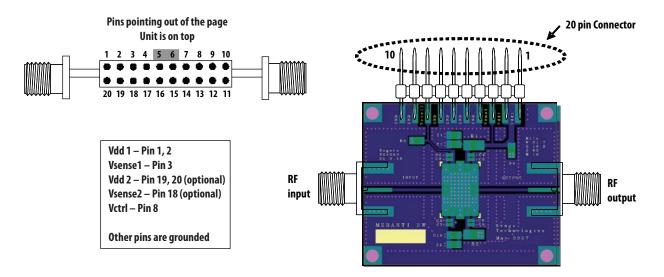



Figure 7. Demo board Layout

- 1. Recommended PCB material is 10 mils Rogers RO4350, with FR4 backing for mechanical strength.
- 2. Suggested component values may vary according to layout and PCB material.

## **ALM-32220 Typical Over-Temperature Performance**

Vdd = 5V, Vctrl = 5V, Input Signal = CW unless stated otherwise.







Figure 8. Over temperature lds

Figure 9. Over temperature OIP3 vs Frequency







Figure 10. Over temperature P1dB vs Frequency

Figure 11. Over temperature Gain vs Frequency






Figure 12. Over temperature S11 vs Frequency

Figure 13. Over temperature S22 vs Frequency




Figure 14. Over temperature S12 vs Frequency




Figure 15. Over temperature WiMAX EVM vs Output Power @ 2.5GHz




Figure 16. Over temperature WCDMA ACPR vs Channel Power @ 2.14GHz




Figure 17. Over temperature WCDMA ACPR vs Channel Power @ 2.5GHz




Figure 18. Over temperature WCDMA ACPR vs Channel Power @ 2.6GHz






Figure 19. Over temperature WCDMA ACPR vs Channel Power @ 2.7GHz

## **PCB Layout and Stencil Design**

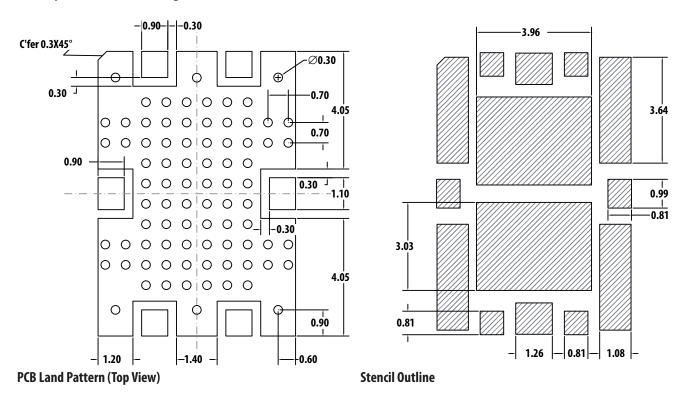

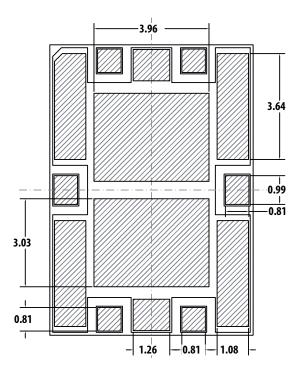



Combined PCB and stencil layout Land Pattern (Top View)


Note:

All dimensions are in millimeters.

# MCOB 7 x 10 Package Dimensions

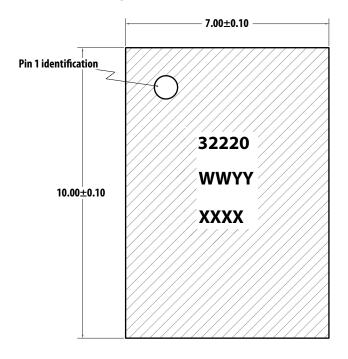



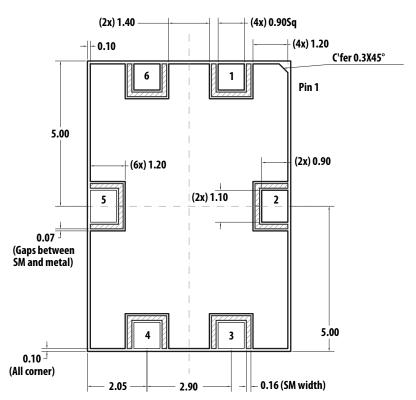

#### Notes:

- 1. All dimensions are in milimeters
- 2. Dimensions are inclusive of plating
- 3. Dimensions are exclusive of mold flash and metal burr


## **Part Number Ordering Information**

Part Number	No. of Devices	Container
ALM-32220-TR1G	1000	13"Reel
ALM-32220-TR2G	3000	13"Reel
ALM-32220-BLKG	100	antistatic bag


### **Product Family**


Output	Frequency Band					
Power	700MHz-1GHz	1.7- 2.7GHz	3.3-3.9GHz			
0.5W	MGA-30116	MGA-30216	MGA-30316			
1W	ALM-31122	ALM-31222	ALM-31322			
2W	ALM-32120	ALM-32220	ALM-32320			

## **Device Orientation**

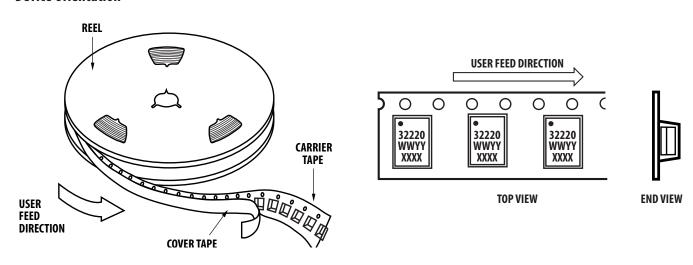


# **Tape Dimensions**

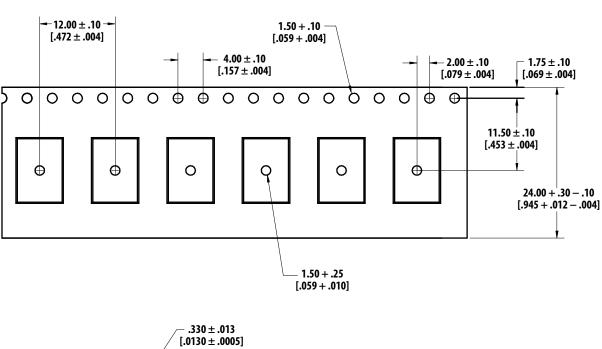

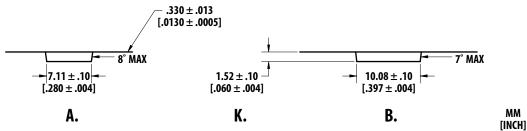

## Reel Dimensions - 13 Inch

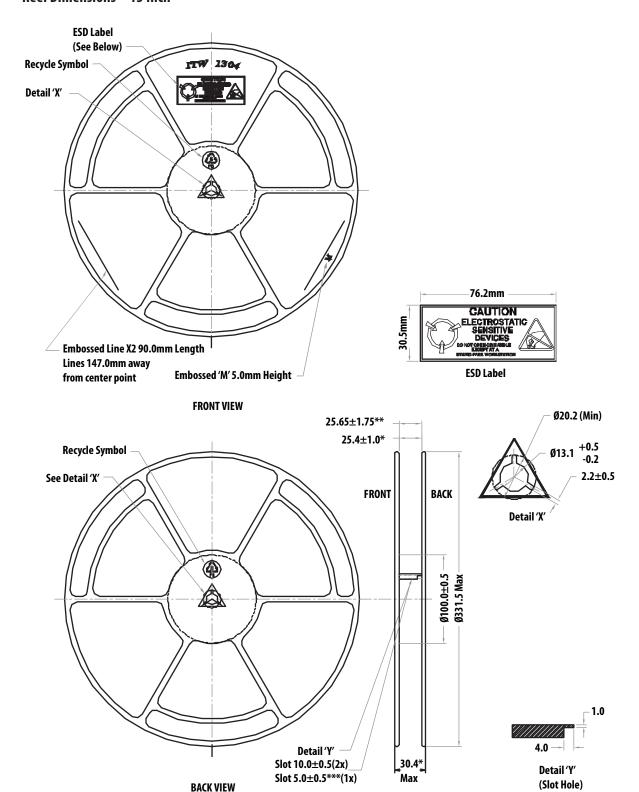

For product information and a complete list of distributors, please go to our web site: **www.avagotech.com** 

