



Quick Start Guide

CONTENT

Introduction

What's in the box

- Ezlo Smart Home Package Content 1
- Product Specification 2

EZLO Controller at Glance

- EZLO LED Indicators 3

Set up: Pairing connecting

- How to Setup EZLO Smart Home 5
- Account Creation & Registration 7
- Controller to your Account 8
- Adding Smart Devices on EZLO 9
- Removing Smart Devices on EZLO 11

Technical Support

16

WHAT'S IN THE BOX?

PACKAGE CONTENT

The possibilities seem endless, find out all you need to know about EZLO Smart Home and get ready to create an efficient and a smarter home. Let's get started!



ezlo Hub Controller



Power Adapter



Ethernet Cable

WHAT'S IN THE BOX?

PRODUCT SPECIFICATION


GENERAL	
Model	EZ0001-1
ENVIRONMENT	
Operating Temperature	-20 → 70 °C
POWER	
Power Requirements	5V@2A (AC voltage, DC input)
Power Consumption	7.5W/2W (Max/Idle in watts)
I/O INTERFACE	
Ethernet	10Base-T, 100Base-TX, 1000 Base-T IEEE802.3 Standards
Wi-Fi	Compatible w/ IEEE 802.11b/g/n Standard
Bluetooth	BT2.1+EDR BT3.0 BT4.0
Z-wave	ZM5202 (865.2MHz-926.3MHz)
USB Port	2x USB 2.0 Host
Display	7x Status LEDs

ezLO Controller at glance



ezLO LED Controllers

ezLO Controller at glance

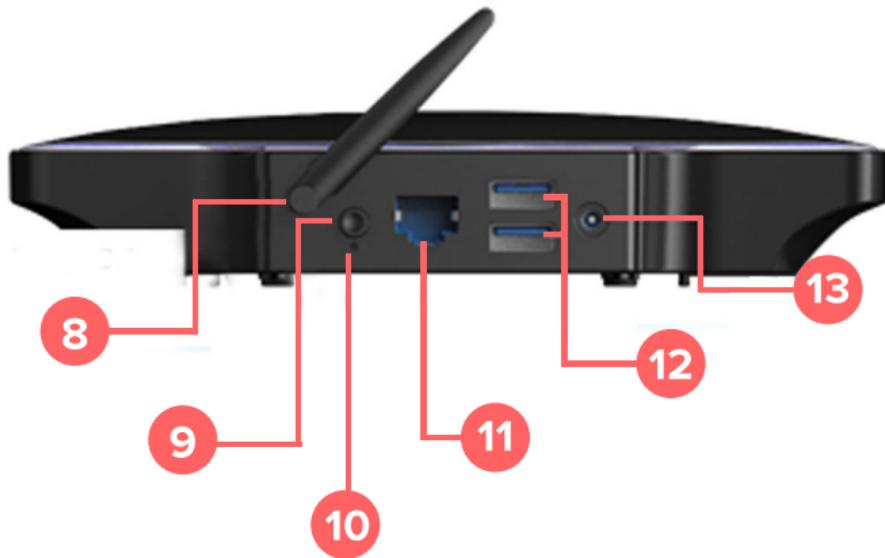

- | | |
|-----------------------|--------------------------|
| 1. Power Indicator | 8. Antenna |
| 2. Ethernet Indicator | 9. Soft Reset Button |
| 3. Wireless Indicator | 10. Factory Reset Button |
| 4. Ready Indicator | 11. LAN Port |
| 5. Error Indicator | 12. USB Port |
| 6. Message Indicator | 13. AC/DC Input |
| 7. Z-Wave Indicator | |

SET UP: Pairing & Connecting


To setup your eZLO Smart Home controller, you'll need a power outlet nearby, an Ethernet (or Wi-Fi) connection, and the mobile/tablet application.

How to set up eZLO




STEP 1:

Plug in eZLO home controller to the power outlet and wait until backlight LED blinks blue; it should take about 2 minutes.



STEP 2:

Connect the Ethernet cable from the eZLO controller to your router. Wait until the backlight LED stays steady with light blue and the ready front LED (#4) is on.



STEP 3:

Download the eZLO App to your smartphone or tablet from App Store/Google Play.



STEP 4:

Connect your device(s) using smartphone app.

Account Creation & Registration on ezLO

From web browser visit: <https://my.ezlo.com/web/>

For new user

Step 1

To create new account, tap on “New User” button and provide the necessary information.

Step 2.

Press the “Sign up” button.

Step 3.

That;s it! You can now start your own smarter home.



Account Creation & Registration on ezLO

Existing User

Step 1


Simply type in your email address and password.

Step 2.

Tap “Login” button.

Step 3.

That's it!

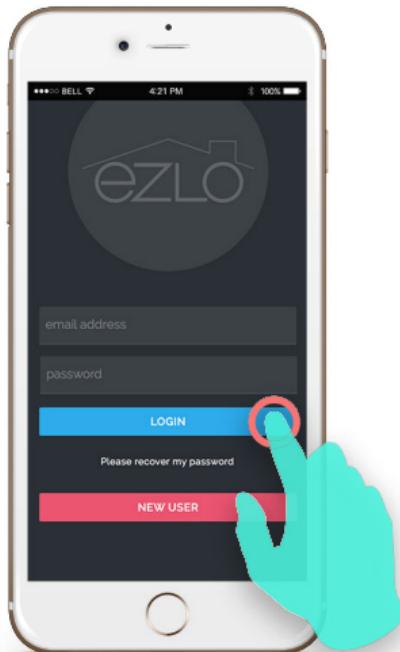


In the event you happen to forget your password, simply click the “Please recover my password” and a link will be sent straight to your registered email address.

Adding ezLO Controller to Your Account


I. Make sure that the power indicator light, ethernet indicator light and ready indicator light is ON.




II. From dashboard click on the + sign

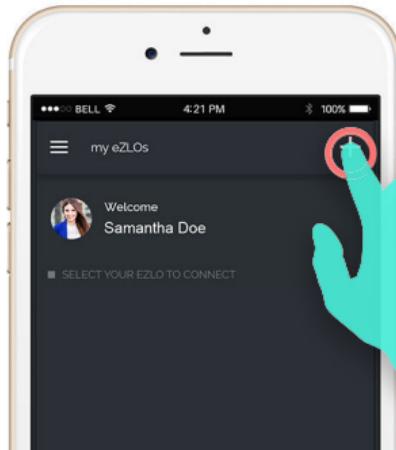

III. Enter the serial number and click add

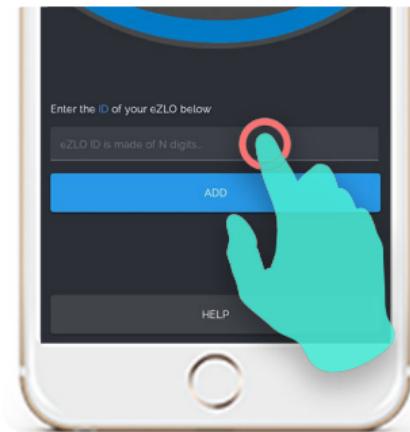


IV. Then it will be successfully added to your dashboard

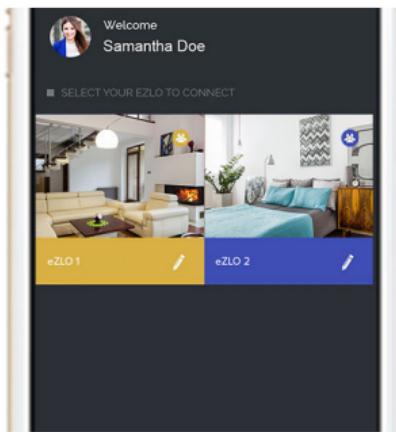


Adding Devices to your ezLO Controller


I. Simply type in your e-mail address and password.

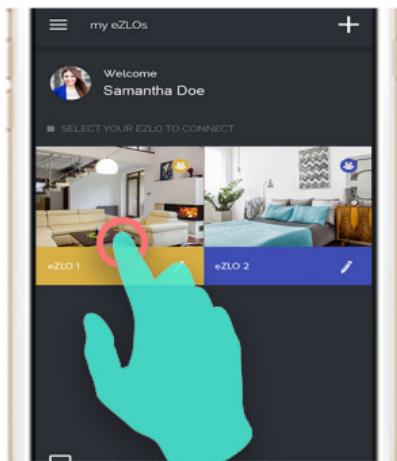


II. From the Dashboard, select your ezLO

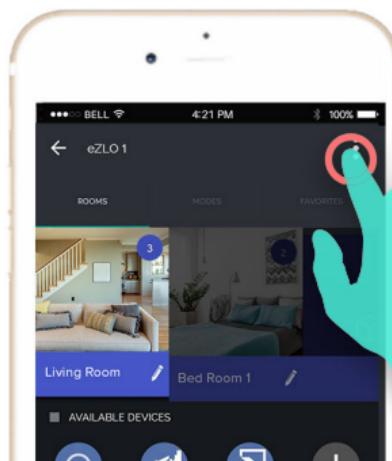

III. Click on the icon and select devices

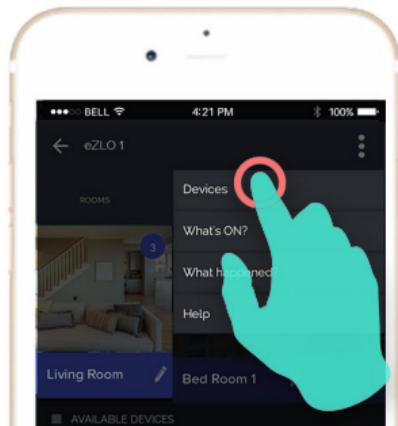


IV. Select Add a New Device

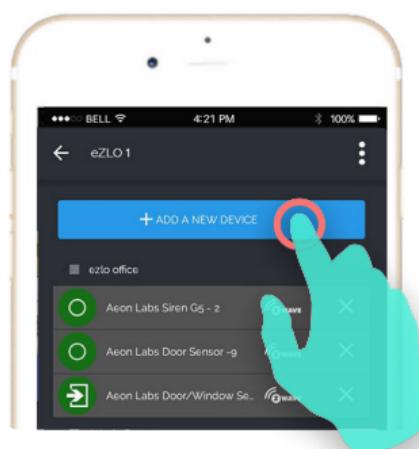


Adding Devices to your ezLO Controller


V. Select z-wave quick add

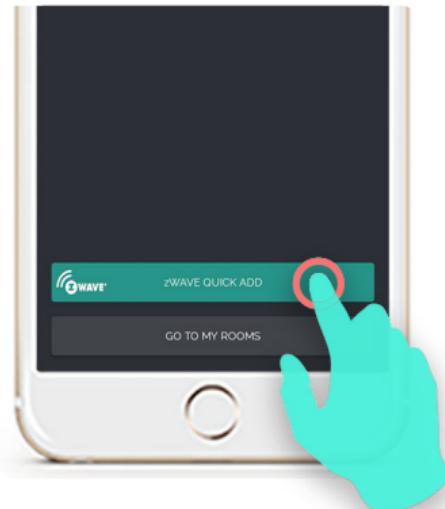


VII. After the device is successfully added, select go to my rooms

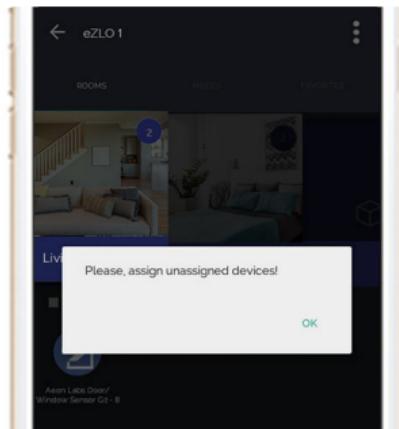

VI. Click on the device three times.

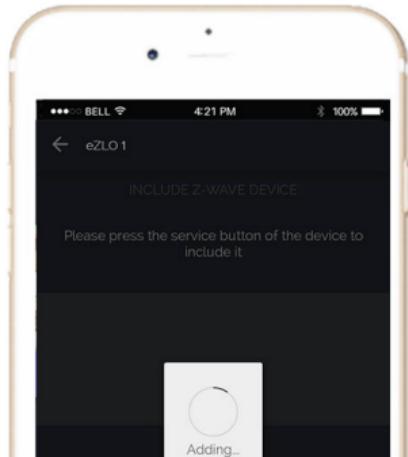


IV. The devices needs to be assigned to a specific room. Drag the device to the desired room.

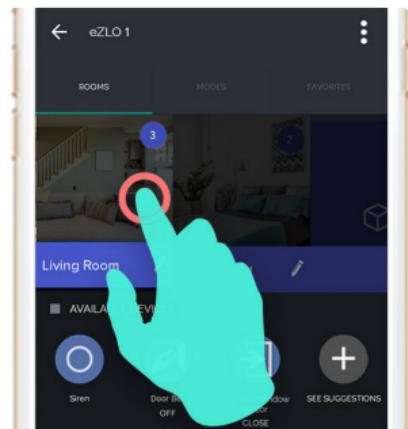


How to remove devices


I. Go to rooms interface and click the specific

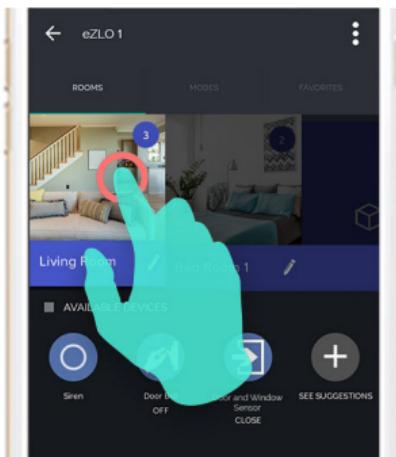


II. Click on the icon and select the device

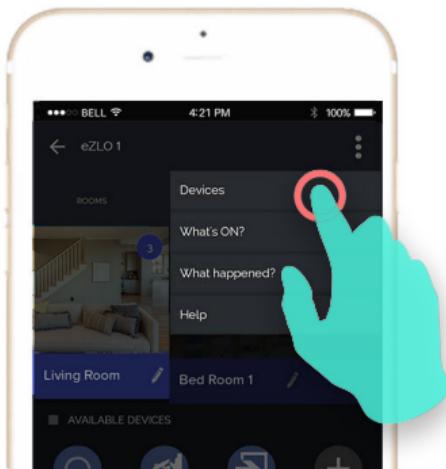

III. Select the name of the device you want to remove. Click on the "X" icon.


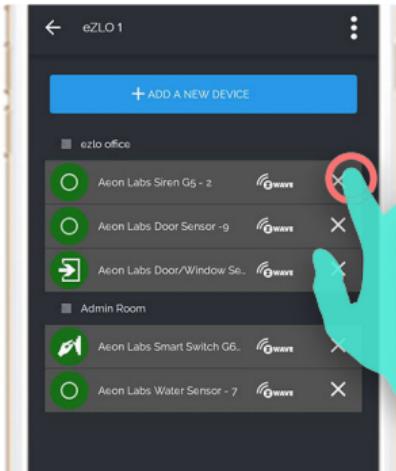


IV. Select Continue

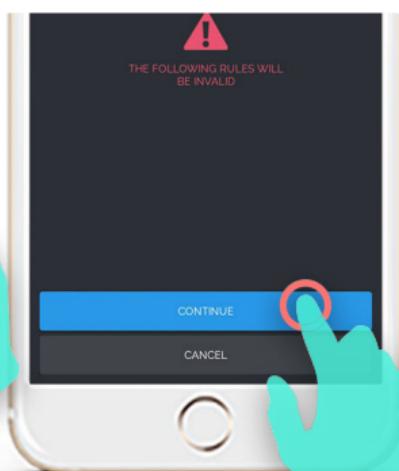


How to remove devices

V. Click on the device three times. The device will be successfully removed.

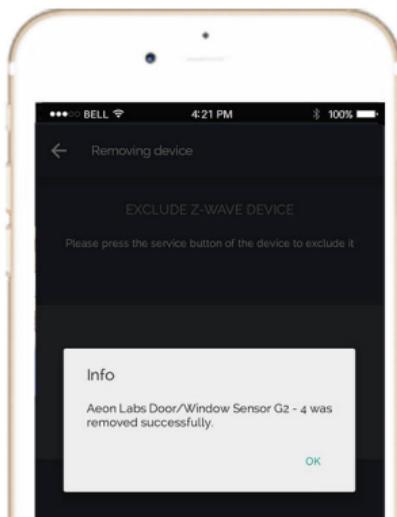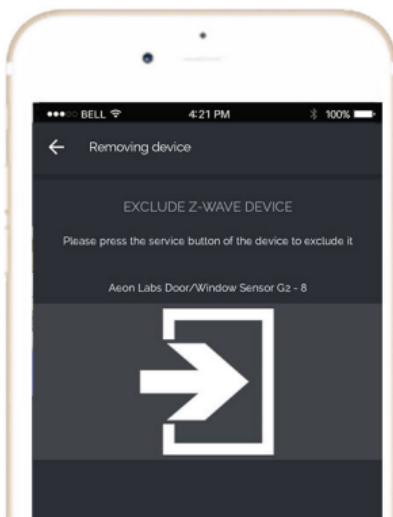


Use Rooms and Rules



I. Click the pencil icon at the bottom part of the room image.

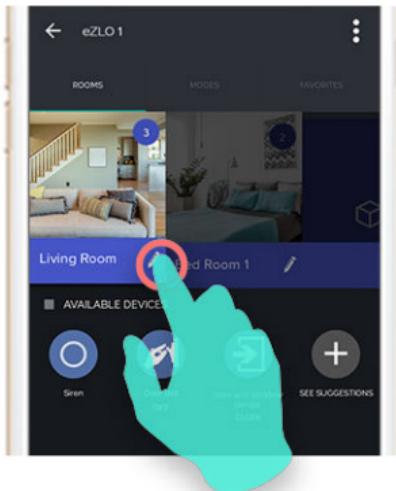

II. Click on the Add Rule


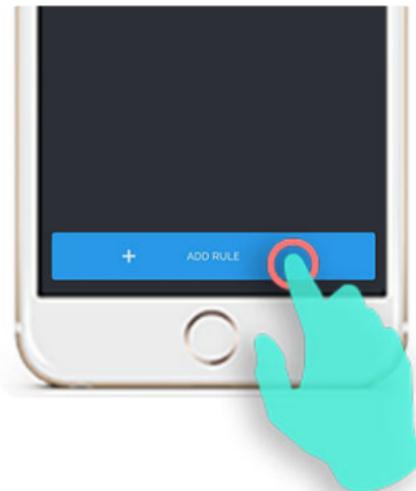


III. Type the Rule Name. Select When and Sensor Status. Then select the room and select the device you want to add rule. Select the status of the device. Then select.

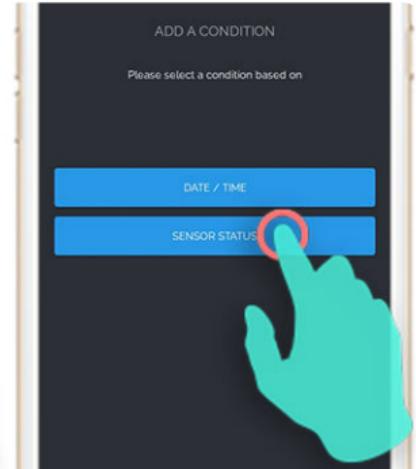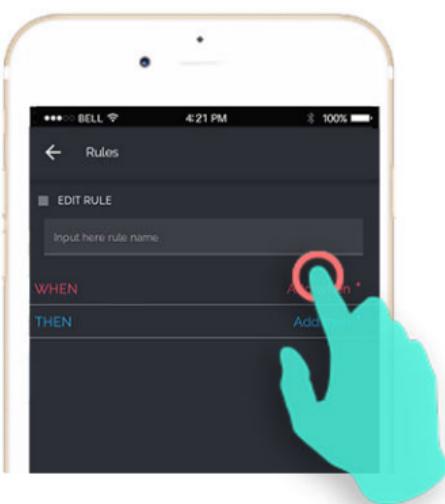


Use Rooms and Rules

III. Type the Rule Name. Select When and Sensor Status. Then select the room and select the device you want to add rule. Select the status of the device. Then select.

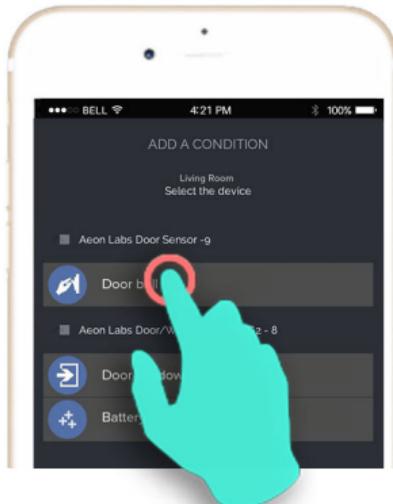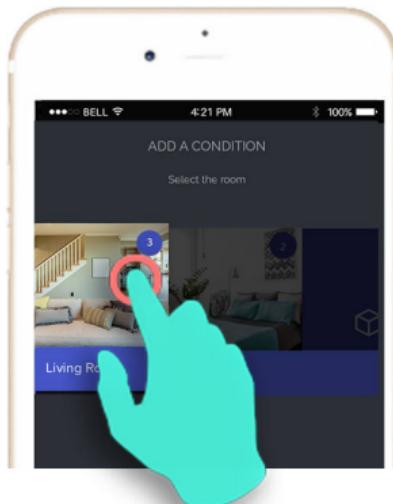


Share eZLO via e-mail/existing users



I. From the dashboard click on the desired eZLO you want to share.

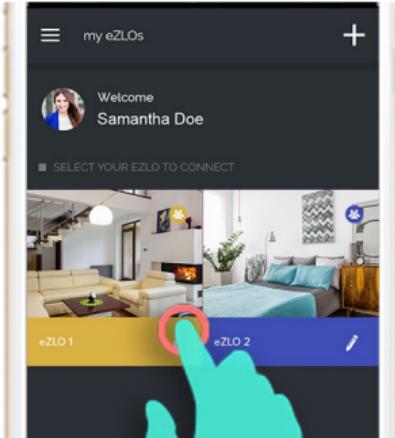

II. Select Share tab and then select share via e-mail

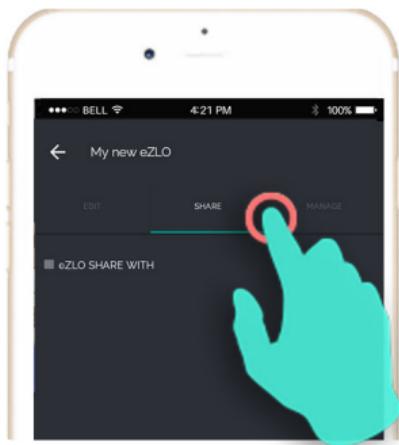

III. Type the email address and click send

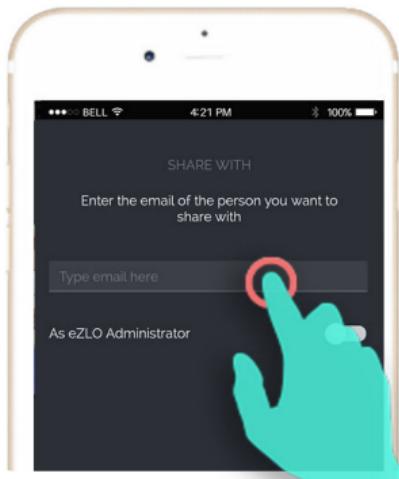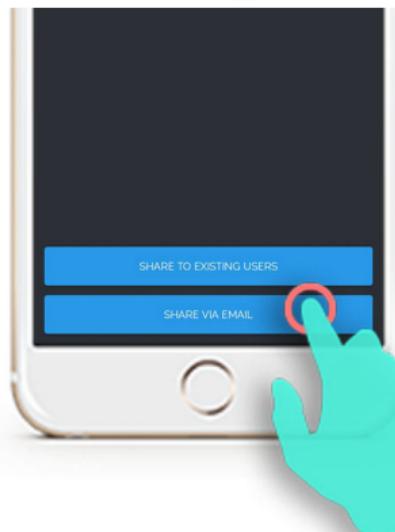

Technical Support

Need Help? We're here for you!

While we strive to create the smartest home possible, you may still need a little assistance every now and then. We encourage you to share your ideas and improvements with us. Contact us and let us know.

Email: support@ezlo.com

Operating Hours:

Monday-Friday | 10:00 am to 5:00 pm (Pacific Time)

If you have time-sensitive questions regarding our products, please feel free to contact our 24/7 Online Support.

NOTICE

This One (1) Year Limited Warranty shall be governed by the laws of the State of New Jersey and by the laws of the United States, excluding their conflicts of laws principles. Some states do not have limitations on how long an implied warranty lasts, allow exclusion or limitation of consequential or incidental damages; thus, the foregoing limitations and exclusions may not apply. This limited warranty provides specific legal rights and the product owner may also have other rights which vary from state to state.

TRADEMARKS

EZLO Smart Home is a registered trademark of EZLO Inc. Other brands and product names are trademarks or registered trademarks and are the property of their respective manufacturers or

COPYRIGHT

No part of this documentation or publication, accompanying this product, may be reproduced or transmitted in any form or by any means, without prior written consent from EZLO Inc, as provisioned by United States copyright law governed by the Federal.

Copyright Act of 1976. 2016 EZLO Inc. All Rights Reserved.

ONE YEAR LIMITED WARRANTY

This “One Year Limited Warranty” represents the sole warranty terms between EZLO Smart Home and your pertaining to purchase of the enclosed EZLO Smart Home System with which warranty is included. Any applicable warranties or disclaimers related to any other EZLO service or offering, including those services related to the use of smart devices, are found in the Terms of Service related to that particular service or offering.

You should only use the smart devices in accordance with the recommendations and specifications in the EZLO Smart Home User Manual and Technical Specifications (the “Compatible Devices”) available at www.ezlo.com. Please keep your dated sales receipt as it is required for all warranty.

PRODUCT REFUND

The following explains how to exchange defective products and whether EZLO Smart Home or the manufacturer must be contacted.

- Your return must be within 30 days of shipped date, in new condition and in the original packaging (refunds exclude shipping fees).

- Within 30 days of purchase. You may request a return shipping label from EZLO Smart Home and refund by sending e-mail to support.ezlo.com
- After 30 days of shipped date, no refund will be processed by EZLO Smart Home – if the product is defective, requires an exchange or falls under warranty. EZLO Smart Home will direct you to the manufacturer for further information.
- EZLO Smart Home does not in any way imply that the manufacturer will provide a refund, exchange or warranty claim.

INTERNATIONAL RETURNS

Our return guarantee does not include freight charges for international returns. If for any reason you choose to return a product from outside the United States, international shipping charges must be pre-paid.

WHAT THE WARRANTY DOES NOT COVER

Repair service, transport neglect, damage due to misuse, abuse, negligence or casualty (e.g., fire, flood, earthquake) are not covered by this warranty. Unauthorized service or modification of the product or of any furnished component will void this warranty in its entirety. This warranty does not include reimbursement for inconvenience, installation, loss of use, unauthorized service, or return shipping charges. In addition, this warranty does not cover any losses, injuries to persons, loss of property or general damages.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY, REPRESENTATION OR CONDITION OF MERCHANTABILITY OR THAT THE PRODUCTS ARE FIT FOR ANY PARTICULAR PURPOSE OR USE, AND SPECIFICALLY IN LIEU OF ALL SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

REPAIR OR REPLACEMENT SHALL BE THE SOLE REMEDY OF THE CUSTOMER AND THERE SHALL BE NO LIABILITY ON THE PART OF EZLO SMART HOME. FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO ANY LOSS OF BUSINESS OR PROFITS, WHETHER OR NOT FORESEEABLE.