Nadav Friedman

TECHNICAL RIDER · PERCUSSION SET

Nadav Friedman · percussion
+972 54-499-1332 · nadaveron@gmail.com
www.nadavfriedman.com

Nadav's standard setup: hand percussion joined with a drum set. Please send any questions or changes before the show day.

01 Input list

CH	SOURCE	MICROPHONE	STAND	NOTES
1	Bass drum (bombo)	Shure Beta 52A or AKG D112 (alt. Audix D6, Sennheiser e602)	Short boom	NO PORT No port hole in the front head: mic outside the front head.
2	Snare	Shure SM57 or similar	None	Nadav brings a drum clip.
3	Darbuka · frame drum · riq	AKG C535 (Nadav's own)	Medium-height boom	**+48V phantom power required.**
4	Bombo 1 (hand drum)	Shure SM57 or similar	Low / short	From underneath the drum.
5	Bombo 2 (hand drum)	Shure SM57 or similar	Low / short	From underneath. Alternative to ch 4–5: one condenser under both drums.
6	Overhead 1 · cymbals	Condenser (e.g. AKG C414, Neumann KM184, Rode NT5)	Tall boom	Right side.
7	Overhead 2 · bells & sounds	Condenser (as ch 6)	Tall boom	Right side, over the hanging bells.
8	Hi-hat · foot bell	Shure SM81, AKG C451 or similar	Short boom	

02 Backline & stage

- 1 drum rug
- 1 drum chair (throne)
- 1 snare stand
- 1 hi-hat stand
- At least 3 cymbal stands with boom arms. **One with a long boom arm** to hang bells and sounds.
- 1 small stool or table for sticks, on Nadav's right

03 Monitor

- 1 monitor wedge on Nadav's **left** side, own mix if possible.

04 Power

- 1 electrical outlet (230V) by the darbuka, for its light (has a dimmer).

05 Nadav brings

- Percussion instruments, AKG C535 microphone, snare mic clip, darbuka light.


Stage plot on page 2

Stage plot

PERCUSSION SET · SEEN FROM ABOVE

Drawn from the player's seat:
audience at the top, Nadav's right on the right.

AUDIENCE · FRONT OF STAGE

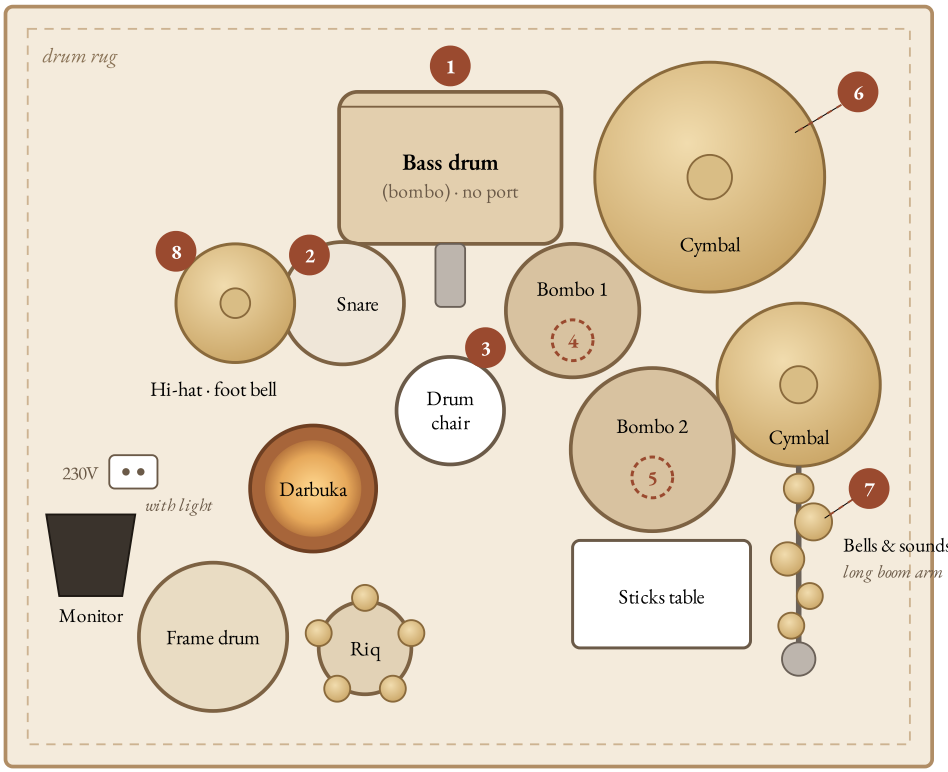

Nadav's left ← → Nadav's right

1. Bass drum · Beta 52A / D112 · short boom, outside front head
2. Snare · SM57 on Nadav's clip
3. Darbuka · frame · riq · AKG C535 (own) · +48V
4. Bombo 1 · SM57 from below · low stand
5. Bombo 2 · SM57 from below · low stand
6. Overhead 1 · cymbals · tall boom
7. Overhead 2 · bells & sounds · tall boom
8. Hi-hat · foot bell · SM81 / C451 · short boom

Dashed markers (4, 5): microphones placed underneath the drums. Darbuka, frame drum and riq are played on the lap and miked by the C535 (3) between the snare and Bombo 1.

Nadav Friedman · +972 54-499-1332 · nadaveron@gmail.com
www.nadavfriedman.com