Station Owner Onboarding Guide

Oct 18, 2026 · @Jagan


Overview

A new station owner goes live in seven steps in the Zappo dashboard at app.zappoevcharging.com: location, station, owner account, assignment, charger connection, pricing, then a test charge. It takes about 30 minutes once you have the details below. This guide is for Zappo staff with a Super Admin login.

Collect before you start


What	Why you need it
Site name, full address, GPS coordinates	Creates the location drivers see on the map
Charger's OCPP ID (the charge point ID set inside the charger)	Must match the station name exactly, or the charger can't connect
Owner's name, email, phone, company	Creates their Zappo Hub login
Agreed price per kWh and Zappo's commission	Sets what drivers pay and what the owner earns
Owner's GSTIN, if GST-registered	Adds GST to driver bills

Where things are. Every step uses the left sidebar. Click the arrow at its top to show the labels.

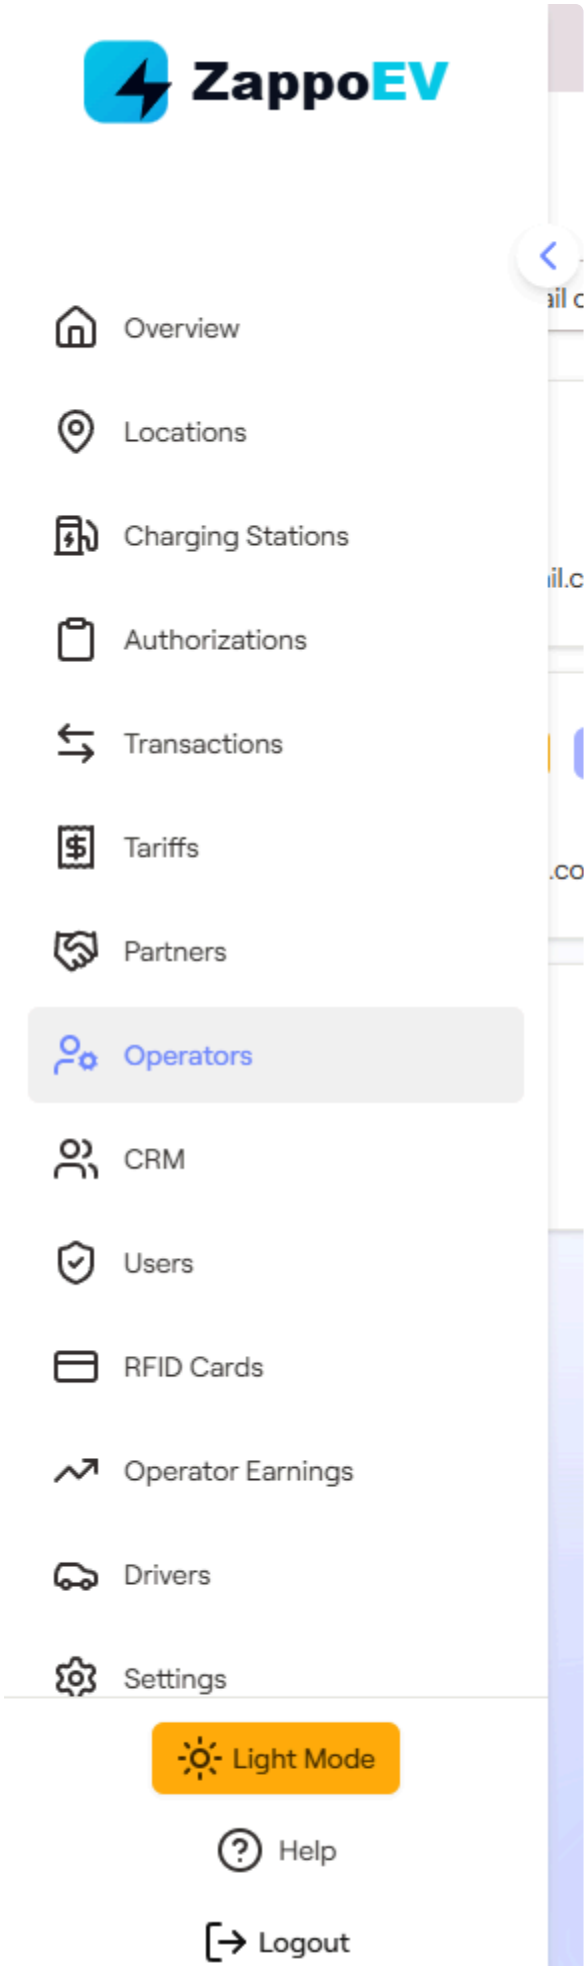
ZappoEV
Overview
Locations
Charging Stations
Authorizations
Transactions
Tariffs
Partners
Operators
CRM
Users
RFID Cards
Operator Earnings
Drivers
Settings
Light Mode
Help
Logout

Step 1 — Add the location

The location is the site drivers find on the map; every station belongs to one. Go to **Locations → + Add Location**.

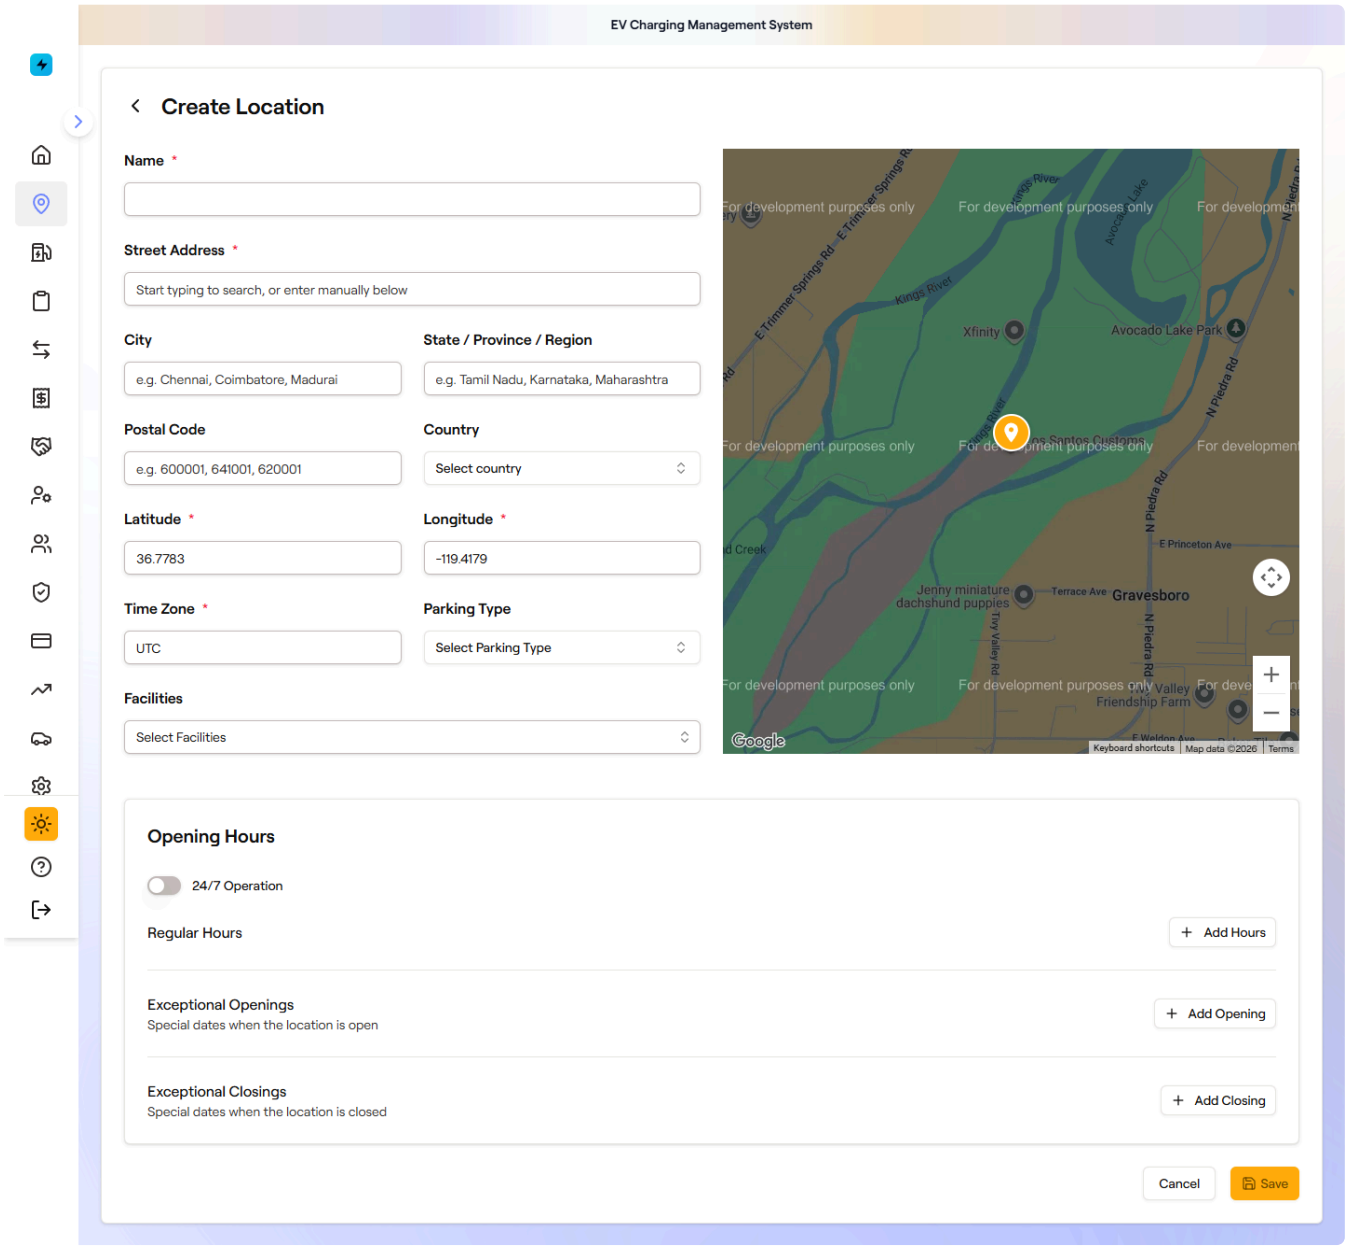


1. **Name**: the name drivers will see, e.g. "Zappo Charging Point, Musiri".
2. **Street Address**, **City**, **State**, **Postal Code**, **Country** (India).
3. **Latitude** and **Longitude**: replace the defaults. The form starts at 36.7783, -119.4179, which is California. Copy the real point from Google Maps (right-click the site → click the coordinates).
4. **Time Zone**: change `UTC` to `Asia/Kolkata`.
5. **Parking Type** and **Facilities**: optional, but they help drivers choose.
6. **Opening Hours**: switch on **24/7 Operation**, or add the regular hours.

7. Click **Save**.

> **Address search and the map don't work right now.** Google Maps shows "This page can't load Google Maps correctly", so typing an address won't autofill. Fill every field by hand, and double-check the coordinates: a wrong point puts the station in the wrong place in the driver app.

Step 2 — Add the charging station

One station = one physical charger. Go to **Charging Stations → + Add Charging Station**.

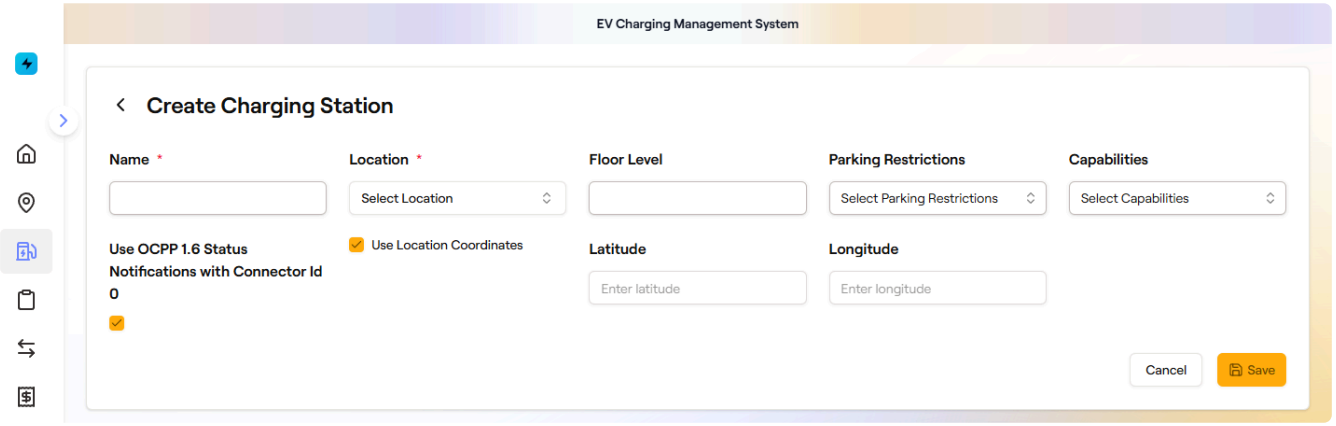


1. **Name**: the charger's OCPP ID, typed **exactly** as it is set inside the charger, same capitals, no extra characters (e.g. `L2001983`). Don't add the gun number: L2002337, not L2002337-1. This is the station's identity on the network, not a display name. If it doesn't match, the charger can't connect (Step 5).
2. **Location**: pick the location from Step 1.
3. **Floor Level**, **Parking Restrictions**, **Capabilities**: optional.
4. **Use OCPP 1.6 Status Notifications with Connector Id 0**: leave ticked.
5. **Use Location Coordinates**: leave ticked, unless this charger stands far from the site's point.
6. Click **Save**.

You don't add connectors (guns) here. They appear on the station's page by themselves within a few minutes of the charger first connecting.

Step 3 — Create the owner account

The owner account is the station owner's login to the **Zappo Hub** app; the dashboard calls owners "Operators". Go to **Operators → New Operator**.

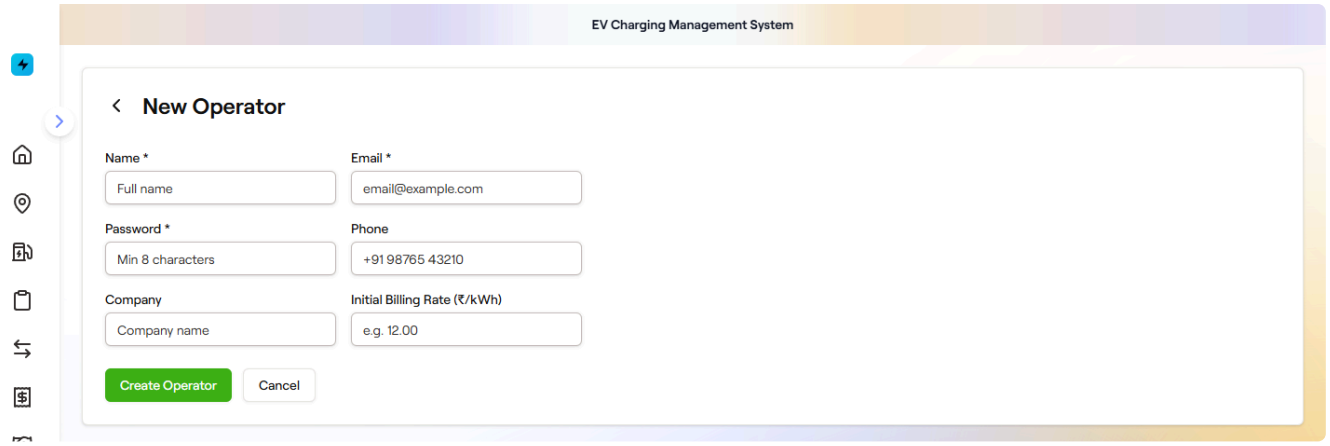


1. **Name** and **Email** (required). The email is their Zappo Hub username. Email and phone must each be unique; the form refuses one already used by another owner.
2. **Password** (required, 8+ characters): set a temporary one and share it privately with the owner, never in a group chat.
3. **Phone** and **Company**: fill both.
4. **Initial Billing Rate (₹/kWh)**: the price drivers pay per kWh at all of this owner's stations, as agreed with the owner.
5. Click **Create Operator**.

If the owner already has an account (a second site, for example), skip this step and go to Step 4.

Step 4 — Assign the station to the owner

Assignment gives the station its price and puts it in the owner's app. Until it is assigned, the station's price is ₹0, so drivers charge there for free and nobody earns. Go to **Operators**, find the owner, and click **Assign Station**.

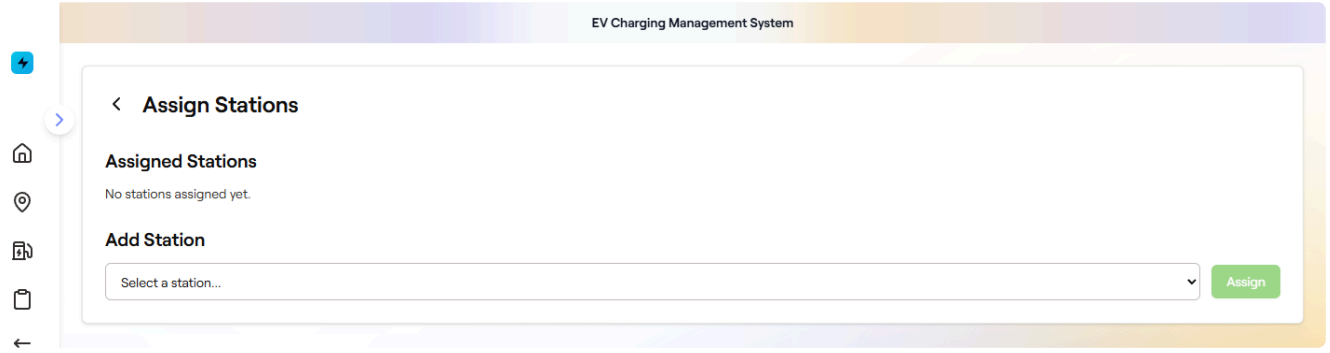

1. Under **Add Station**, pick the station from Step 2 by its OCPP ID.
2. Click **Assign**. It moves up into **Assigned Stations**.

> **Assign each station to one owner only.** The list shows every station, including ones already assigned to other owners, and nothing stops a double assignment. Check the station isn't already listed under another owner first.

Step 5 — Connect the charger

The charger talks to Zappo over OCPP. Open the charger's network or OCPP settings (its local web page or the vendor's app) and enter:

Charger setting	Value
Central system / OCPP server URL	`ws://65.0.157.6:8081/`
Charge point ID	The OCPP ID you used as the station **Name** in Step 2
Protocol	OCPP 1.6J, or 2.0.1 if the charger supports it
Security / password	None


Some chargers want the ID typed onto the end of the URL (`ws://65.0.157.6:8081/L2001983`) and have no separate ID field. Use whichever the charger asks for.

Check it came online. Within about a minute of the charger rebooting, open **Charging Stations**. The station should show as online with its protocol filled in, and its connectors appear on its page shortly after.

> Use port **8081** for chargers. Port 8080 is an internal API and won't accept them.

Step 6 — Set pricing, commission and GST

Check the money settings before the first driver charges, because each bill is calculated and frozen at the moment the session ends. Go to **Operators**, find the owner, and click **Edit**.

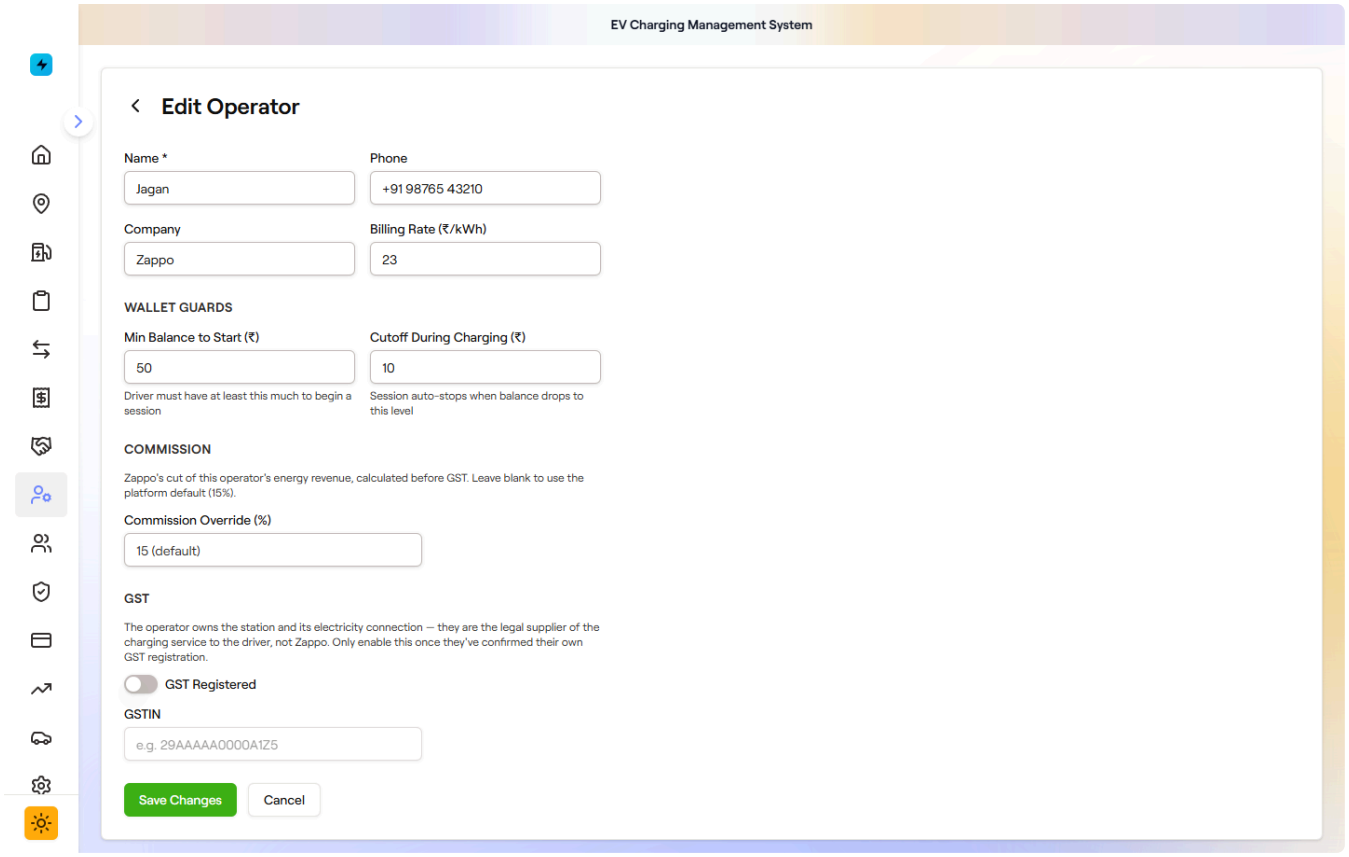

Field	What it does	Typical value
Billing Rate (₹/kWh)	Price drivers pay at all this owner's stations. A change applies to sessions from then on, and the old rate is kept in history.	As agreed, e.g. 23
Min Balance to Start (₹)	A driver with less in their wallet can't start a session.	50
Cutoff During Charging (₹)	The session stops by itself when the driver's balance falls to this.	10
Commission Override (%)	Zappo's share of the energy revenue, worked out before GST. Leave blank for the platform default (15%).	Blank, unless agreed otherwise
GST Registered + GSTIN	Adds GST to driver bills. The owner is the legal supplier and keeps the GST to pay it, so switch this on only after they confirm their own GST registration.	Off, until confirmed

Click **Save Changes**. The owner's payout is the bill total minus Zappo's commission, so any GST collected passes through to them.

Step 7 — Hand over and run a test charge

The site is live only after one real charge has gone through end to end, with the owner watching. Do it on site, with the owner logged in.

- [ ] Owner installs **Zappo Hub** and signs in with the email and temporary password from Step 3.
- [ ] The station appears in the owner's app as online.
- [ ] In the **Zappo EV Charging** driver app, the station shows on the map at the right spot.
- [ ] Start a charge from the driver app, run it for a few minutes, then stop it from the app.
- [ ] The session appears in the dashboard under **Transactions**, with kWh and cost at the agreed rate.
- [ ] The same session shows in the owner's Zappo Hub earnings.

Wallet top-ups in the driver app currently add test credit, not real money, so use any test driver account.

Optional — RFID cards

An RFID card lets a driver charge by tapping, without the app; it works at all of one owner's stations and no others. Use **RFID Cards** in the sidebar, never the Authorizations page: a card added there works at every station on the network and is never billed.

1. On **RFID Cards**, pick the owner and enter the card number as the charger reads it, without colons: `33:33:52:07` on the card becomes `33335207`.
2. The driver who will pay claims the card: enter their phone number in the **link your driver identity** box, then the OTP, then click **Claim**. The charger refuses the card until it is claimed.
3. Tap the card on the charger. If it's refused, the charger may read the number in reverse byte order (`07523333`); ask the tech team to check what the charger actually sent.

No card has been tapped on a live charger yet, so the first one is also a test of the card path.

Troubleshooting

Problem	Check
Charger never comes online	The charge point ID matches the station **Name** exactly (capitals, no `-1` or spaces); the URL uses port **8081** and `ws://`, not `wss://`; the charger has internet (SIM data or Wi-Fi).
Station is online but has no connectors	Wait a few minutes. Connectors appear once the charger reports its status; if they don't, reboot the charger.
Station shows in the wrong place in the driver app	The location's latitude and longitude are wrong or still the California defaults. Edit the location.
Owner can't see the station in Zappo Hub	The station isn't assigned to them (Step 4).
Owner can't log in	On **Operators**, click **Reset Password** on their card and share the new one privately.
"Email already registered" or "Phone number already registered"	That owner already has an account. Use it, or check for a typo.
Address search and map don't load	Known issue with the Google Maps key. Type the address and coordinates by hand.

Still stuck? Send the station's OCPP ID and the time you tried to the tech team; the server logs show every connection attempt.