
Revisions

Rev.	Date	Author	Description
A	21/01/2018	Florent de Labarre	Creation
B	15/06/2020	Florent de Labarre	Replaced FBA_03 by KE_01 on keybox engine connector label
C	08/09/2020	P.L.P	Modifs nom étiquette

Main_MC42

Cavity	To	Conductor	Color	Gauge	Length
1	CanBus_Main_to_MC4_10.B	W22.White		0,75 mm²	≥ 1,7 m
2	Engine.B	W23.White		0,75 mm²	≥ 1,7 m
3	Can_Drive.B	W57.White		0,75 mm²	≥ 0,7 m
4	IDTAG_1.2	W50.White		0,75 mm²	≥ 0,1 m
7	Vref_Plus	W59.White		0,75 mm²	
8	R8.POS	W16.White		0,75 mm²	
9	Pressure_block.2	W17.White		0,75 mm²	
10	Pressure_tracks.2	W19.White		0,75 mm²	
14	Splice_Right	W45.White		0,75 mm²	
15	Splice_Left	W48.White		0,75 mm²	
17	CanBus_Main_to_MC4_10.A	W21.White		0,75 mm²	≥ 1,7 m
18	Engine.A	W24.White		0,75 mm²	≥ 1,7 m
19	Can_Drive.A	W56.White		0,75 mm²	≥ 0,7 m
20	IDTAG_1.1	W49.White		0,75 mm²	≥ 0,1 m
23	Vref_Minus	W60.White		0,75 mm²	
25	Temp_Oil.2	W8.White		0,75 mm²	
26	Pump_State.2	W9.White		0,75 mm²	
39	Right_Pump_1.1	W46.White		0,75 mm²	
40	Left_pump_1.1	W63.White		0,75 mm²	
41	ByPass.2	W1.White		0,75 mm²	
42	Landing_DOWN.2	W3.White		0,75 mm²	
43	Landing_Unblock.2	W5.White		0,75 mm²	
44	Brake.2	W7.White		0,75 mm²	
46	Splice_C1_46	W14.White		0,75 mm²	
47	Splice_C1_47	W15.White		0,75 mm²	
55	Right_pump_2.1	W47.White		0,75 mm²	
56	Left_Pump_2.1	W64.White		0,75 mm²	
57	Landing_UP.2	W2.White		0,75 mm²	
58	Track_Tension.2	W4.White		0,75 mm²	
59	Landing_Block.2	W6.White		0,75 mm²	
65	12V	W43.Red		2,5 mm²	
66	Supply.B	W44.Black		2,5 mm²	≥ 2 m

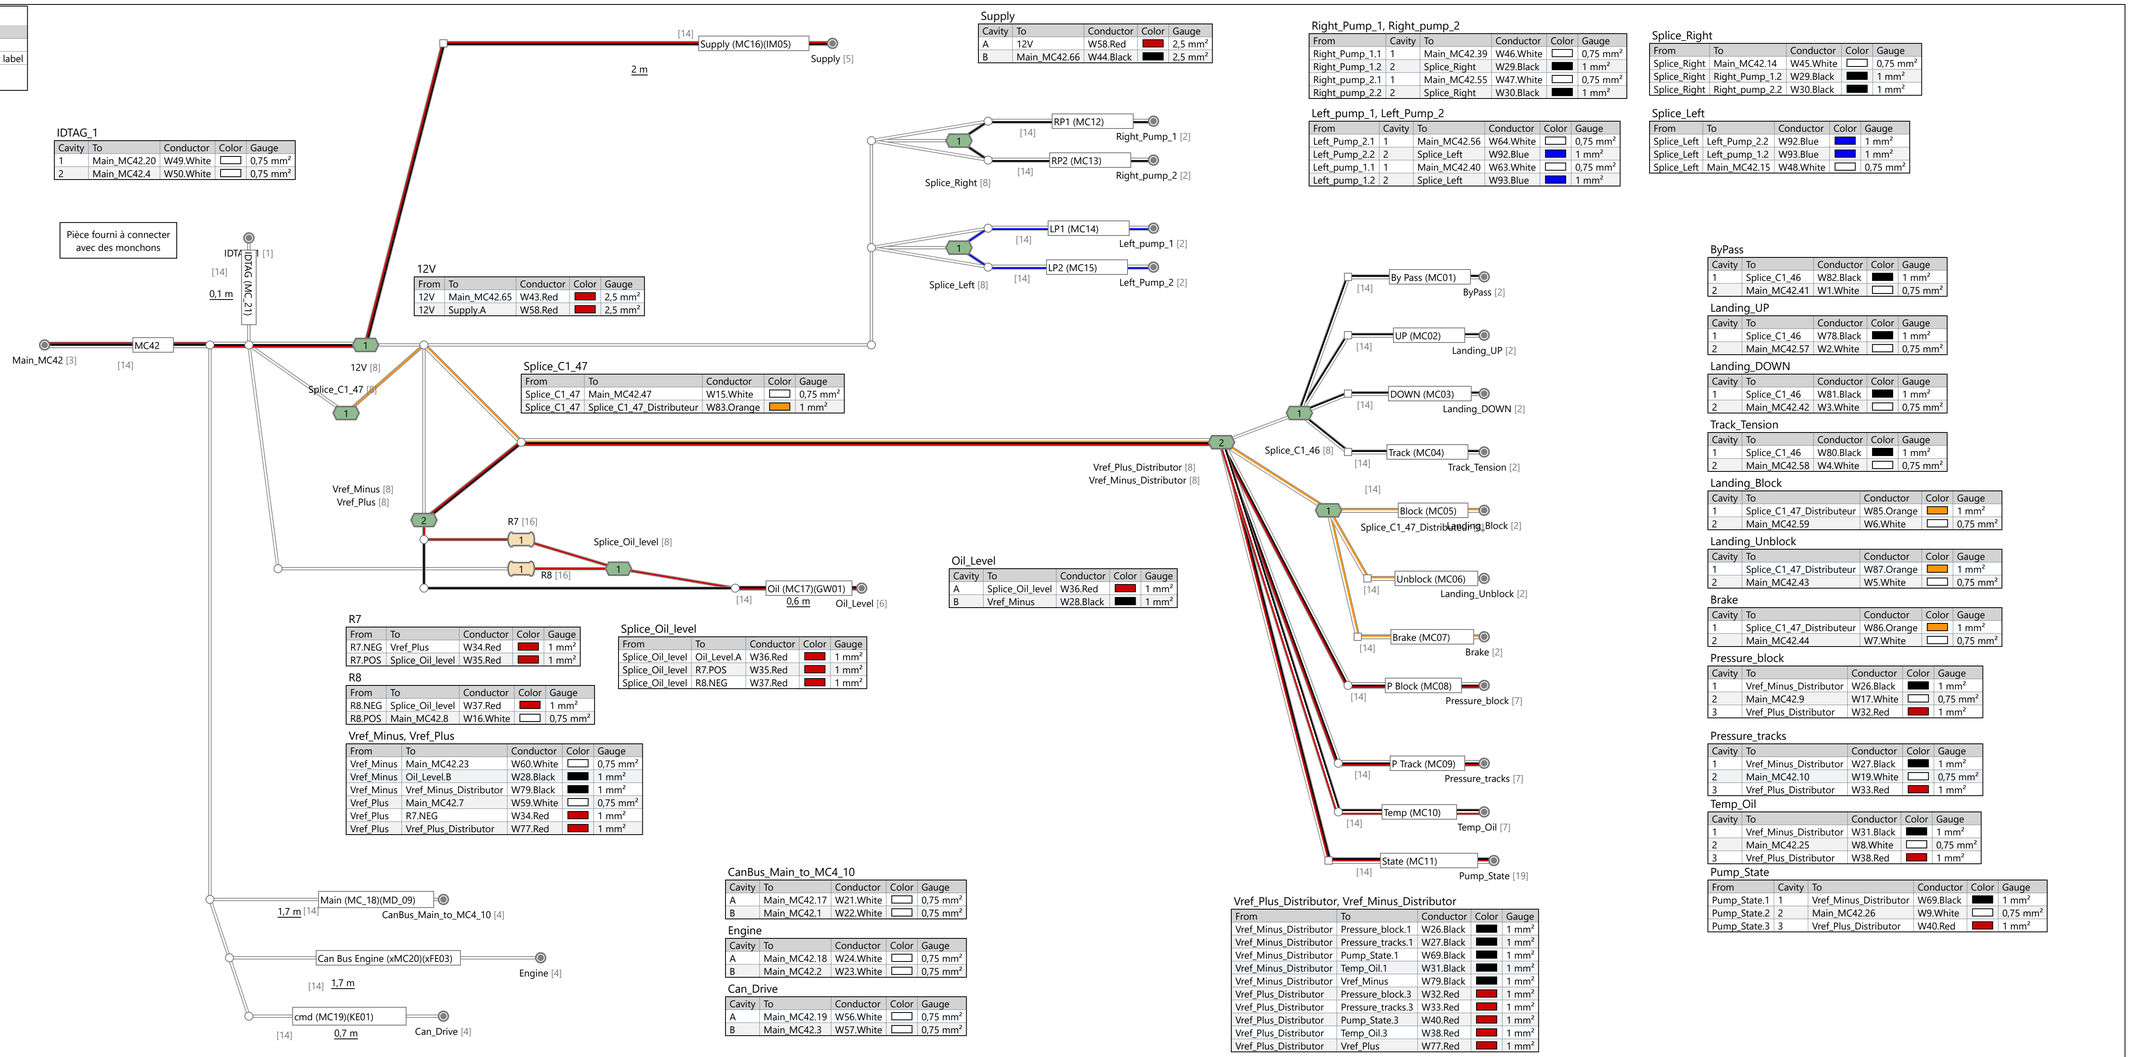

Supply

Cavity	To	Conductor	Color	Gauge
A	12V	W58.Red		2,5 mm²
B	Main_MC42.66	W44.Black		2,5 mm²

12V

From	To	Conductor	Color	Gauge
12V	Main_MC42.65	W43.Red		2,5 mm²
12V	Supply.A	W58.Red		2,5 mm²

Splice_C1_47

From	To	Conductor	Color	Gauge
Splice_C1_47	Main_MC42.47	W15.White		0,75 mm²
Splice_C1_47	Splice_C1_47_Distributeur	W83.Orange		1 mm²

Oil_Level

Cavity	To	Conductor	Color	Gauge
A	Splice_Oil_level	W36.Red		1 mm²
B	Vref_Minus	W28.Black		1 mm²

R7

From	To	Conductor	Color	Gauge
R7.NEG	Vref_Plus	W34.Red		1 mm²
R7.POS	Splice_Oil_level	W35.Red		1 mm²

Splice_Oil_level

From	To	Conductor	Color	Gauge
Splice_Oil_level	Oil_Level.A	W36.Red		1 mm²
Splice_Oil_level	R7.POS	W35.Red		1 mm²
Splice_Oil_level	R8.NEG	W37.Red		1 mm²

R8

From	To	Conductor	Color	Gauge
R8.NEG	Splice_Oil_level	W37.Red		1 mm²
R8.POS	Main_MC42.8	W16.White		0,75 mm²

Vref_Minus, Vref_Plus

From	To	Conductor	Color	Gauge
Vref_Minus	Main_MC42.23	W60.White		0,75 mm²
Vref_Minus	Oil_Level.B	W28.Black		1 mm²
Vref_Minus	Vref_Minus_Distributor	W79.Black		1 mm²
Vref_Plus	Main_MC42.7	W59.White		0,75 mm²
Vref_Plus	R7.NEG	W34.Red		1 mm²
Vref_Plus	Vref_Plus_Distributor	W77.Red		1 mm²

CanBus_Main_to_MC4_10

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.17	W21.White		0,75 mm²
B	Main_MC42.1	W22.White		0,75 mm²

Engine

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.18	W24.White		0,75 mm²
B	Main_MC42.2	W23.White		0,75 mm²

Can_Drive

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.19	W56.White		0,75 mm²
B	Main_MC42.3	W57.White		0,75 mm²

Right_Pump_1, Right_pump_2

From	Cavity	To	Conductor	Color	Gauge
Right_Pump_1.1	1	Main_MC42.39	W46.White		0,75 mm²
Right_Pump_1.2	2	Splice_Right	W29.Black		1 mm²
Right_pump_2.1	1	Main_MC42.55	W47.White		0,75 mm²
Right_pump_2.2	2	Splice_Right	W30.Black		1 mm²

Left_pump_1, Left_Pump_2

From	Cavity	To	Conductor	Color	Gauge
Left_Pump_2.1	1	Main_MC42.56	W64.White		0,75 mm²
Left_Pump_2.2	2	Splice_Left	W92.Blue		1 mm²
Left_pump_1.1	1	Main_MC42.40	W63.White		0,75 mm²
Left_pump_1.2	2	Splice_Left	W93.Blue		1 mm²

Splice_Right

From	To	Conductor	Color	Gauge
Splice_Right	Main_MC42.14	W45.White		0,75 mm²
Splice_Right	Right_Pump_1.2	W29.Black		1 mm²
Splice_Right	Right_pump_2.2	W30.Black		1 mm²

Splice_Left

From	To	Conductor	Color	Gauge
Splice_Left	Left_Pump_2.2	W92.Blue		1 mm²
Splice_Left	Left_pump_1.2	W93.Blue		1 mm²
Splice_Left	Main_MC42.15	W48.White		0,75 mm²

ByPass

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W82.Black		1 mm²
2	Main_MC42.41	W1.White		0,75 mm²

Landing_UP

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W78.Black		1 mm²
2	Main_MC42.57	W2.White		0,75 mm²

Landing_DOWN

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W81.Black		1 mm²
2	Main_MC42.42	W3.White		0,75 mm²

Track_Tension

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W80.Black		1 mm²
2	Main_MC42.58	W4.White		0,75 mm²

Landing_Block

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_47_Distributeur	W85.Orange		1 mm²
2	Main_MC42.59	W6.White		0,75 mm²

Landing_Unblock

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_47_Distributeur	W87.Orange		1 mm²
2	Main_MC42.43	W5.White		0,75 mm²

Brake

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_47_Distributeur	W86.Orange		1 mm²
2	Main_MC42.44	W7.White		0,75 mm²

Pressure_block

Cavity	To	Conductor	Color	Gauge
1	Vref_Minus_Distributor	W26.Black		1 mm²
2	Main_MC42.9	W17.White		0,75 mm²
3	Vref_Plus_Distributor	W32.Red		1 mm²

Pressure_tracks

Cavity	To	Conductor	Color	Gauge
1	Vref_Minus_Distributor	W27.Black		1 mm²
2	Main_MC42.10	W19.White		0,75 mm²
3	Vref_Plus_Distributor	W33.Red		1 mm²

Temp_Oil

Cavity	To	Conductor	Color	Gauge
1	Vref_Minus_Distributor	W31.Black		1 mm²
2	Main_MC42.25	W8.White		0,75 mm²
3	Vref_Plus_Distributor	W38.Red		1 mm²

Pump_State

From	Cavity	To	Conductor	Color	Gauge
Pump_State.1	1	Vref_Minus_Distributor	W69.Black		1 mm²
Pump_State.2	2	Main_MC42.26	W9.White		0,75 mm²
Pump_State.3	3	Vref_Plus_Distributor	W40.Red		1 mm²

Vref_Plus_Distributor, Vref_Minus_Distributor

From	To	Conductor	Color	Gauge
Vref_Minus_Distributor	Pressure_block.1	W26.Black		1 mm²
Vref_Minus_Distributor	Pressure_tracks.1	W27.Black		1 mm²
Vref_Minus_Distributor	Pump_State.1	W69.Black		1 mm²
Vref_Minus_Distributor	Temp_Oil.1	W31.Black		1 mm²
Vref_Minus_Distributor	Vref_Minus	W79.Black		1 mm²
Vref_Plus_Distributor	Pressure_block.3	W32.Red		1 mm²
Vref_Plus_Distributor	Pressure_tracks.3	W33.Red		1 mm²
Vref_Plus_Distributor	Pump_State.3	W40.Red		1 mm²
Vref_Plus_Distributor	Temp_Oil.3	W38.Red		1 mm²
Vref_Plus_Distributor	Vref_Plus	W77.Red		1 mm²

Splice_C1_46

From	To	Conductor	Color	Gauge
Splice_C1_46	ByPass.1	W82.Black		1 mm²
Splice_C1_46	Landing_DOWN.1	W81.Black		1 mm²
Splice_C1_46	Landing_UP.1	W78.Black		1 mm²
Splice_C1_46	Main_MC42.46	W14.White		0,75 mm²
Splice_C1_46	Track_Tension.1	W80.Black		1 mm²


Splice_C1_47_Distributeur


From	To	Conductor	Color	Gauge
Splice_C1_47_Distributeur	Brake.1	W86.Orange		1 mm²
Splice_C1_47_Distributeur	Landing_Block.1	W85.Orange		1 mm²
Splice_C1_47_Distributeur	Landing_Unblock.1	W87.Orange		1 mm²
Splice_C1_47_Distributeur	Splice_C1_47	W83.Orange		1 mm²


Couper les Cable non tuilisé à 30 cm de la prise.


Supply = alimentation
Water = eau
Level = niveau
Splice = épissure
Seat = fauteil
hal captor = capteur de vitesse
Ladder = echelle
Oil = huile
Track = chenille
Pressure = pression

Wiring diagram



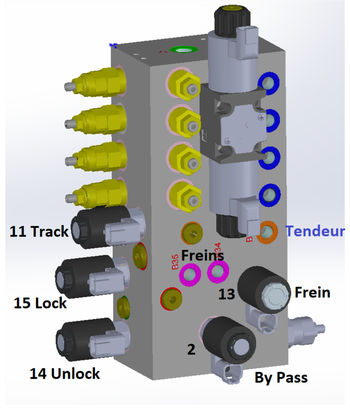

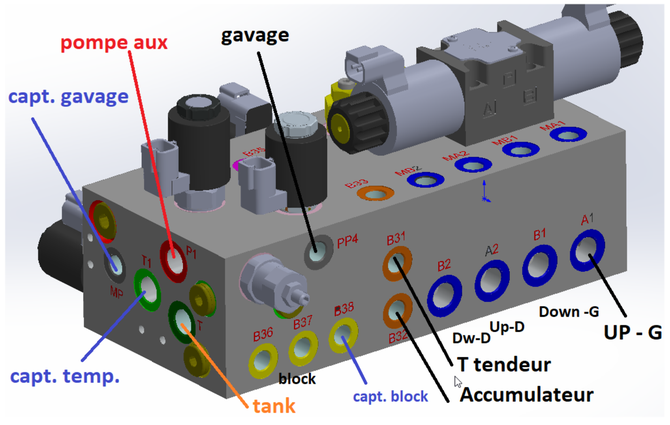

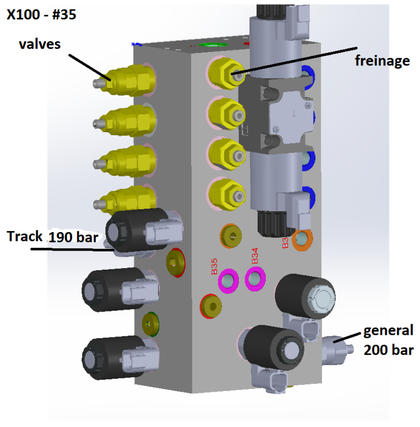

Bill of Materials

Id	Type	Manufacturer	Part Number	Quantity	Description
1	Connector		#21436 - Parker_IDTAG_1	1	5030061
2	Connector		#20694 - Phoenix_valve_2_way	11	651-1410723
3	Connector		#24679 - Parker_C1_66_way	1	
4	Connector	Delphi	#15215 - Delphi_150_2_way_male	3	829-12162000
5	Connector	Delphi	#17183 - Delphi_480_2_way_male	1	829-12065863
6	Connector	Delphi	#17351 - Delphi_280_2_way_female	1	829-15300027
7	Connector	TE	#12189 - Te_Timer_3_way_female	3	571-2821911
8	Splice		Generic Splice	11	Generic Splice
9	Wire		1mm² Black	≥ 0,6 m	
10	Wire		1mm² Red	≥ 0,6 m	
11	Wire		2.5mm² - Black	≥ 2 m	
12	Wire		2.5mm² - Red	≥ 2 m	
13	Wire		C1_Wire	≥ 8,4 m	
14	Label		Generic White Label	22	Generic Label
15	Wire		1 mm² - Orange		
16	Resistor		#21463 - 240 Ohm resistor	2	
17	Wire		1 mm² Orange		Generic Wire
18	Wire		1mm² - Blue		
19	Connector		#28977- AMP Superseal 3 ways	1	

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

Title: #22679 - MC42_X100 (xMC)- A1 - IND C
Description: Dernière modif le 08/09/20 - modifs étiquette
Revision: ----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.