Revisions

Rev.	Date	Author	Description
A	21/01/2018	Florent de Labarre	1028
B	21/01/2018	Florent de Labarre	1025
C	10/04/2018	Florent de Labarre	
D	19/02/2019	Maxime Bouyssou	add annotation
E	08/01/2020	Thomas Bouche	arrangement pour lecture
F	03/11/2020	P.L.P	Chgmt Supply Hall captor 5V-> 12V
G	07/01/2021	P.L.P	Ajout résistance pull-up Hall captor
H	24/02/2021	Pierre Edeline	Suppression : Contact_HT_BMW

Main_MC42

Cavity	To	Conductor	Color	Gauge	Length
1	CanBus_Main_to_MC4_10.B	W22.White		0,75 mm²	≥ 0,5 m
2	CanBus_ElectricDrive.B	W23.White		0,75 mm²	≥ 1,5 m
3	Can_Battery_HV.B	W57.White		0,75 mm²	≥ 0,5 m
4	IDTAG_1.2	W50.White		0,75 mm²	≥ 0,1 m
7	Vref_Plus	W59.White		0,75 mm²	
8	R8.POS	W16.White		0,75 mm²	
9	Pressure_block.2	W17.White		0,75 mm²	
10	Pressure_tracks.2	W19.White		0,75 mm²	
11	Output_A	W55.White		0,75 mm²	
12	Output_B	W61.White		0,75 mm²	
14	PWM_tension_tracks.1	W12.White		0,75 mm²	
17	CanBus_Main_to_MC4_10.A	W21.White		0,75 mm²	≥ 0,5 m
18	CanBus_ElectricDrive.A	W24.White		0,75 mm²	≥ 1,5 m
19	Can_Battery_HV.A	W56.White		0,75 mm²	≥ 0,5 m
20	IDTAG_1.1	W49.White		0,75 mm²	≥ 0,1 m
23	Vref_Minus	W60.White		0,75 mm²	
24	R10.POS	W18.White		0,75 mm²	
25	R11.POS	W73.White		1 mm²	
26	Accelerometre.D	W46.White		0,75 mm²	≥ 1 m
28	Remote_Power_Box.A	W25.White		0,75 mm²	≥ 1 m
29	Remote_Power_Box.B	W45.White		0,75 mm²	≥ 1 m
36	Accelerometre.E	W47.White		0,75 mm²	≥ 1 m
39	PWM_tension_tracks.2	W13.White		0,75 mm²	
41	ByPass.2	W1.White		0,75 mm²	
42	Landing_DOWN.2	W3.White		0,75 mm²	
43	Landing_Unblock.2	W5.White		0,75 mm²	
44	Electric_Drive_FuseBox_B1.A	W53.White		0,75 mm²	≥ 0,5 m
45	Seat_Control.B	W52.White		0,75 mm²	≥ 0,3 m
46	Splice_C1_46	W14.White		0,75 mm²	
47	Splice_C1_47	W15.White		0,75 mm²	
48	Seat_Control.A	W51.White		0,75 mm²	≥ 0,3 m
52	Accelerometre.F	W48.White		0,75 mm²	≥ 1 m
57	Landing_UP.2	W2.White		0,75 mm²	
58	Track_Tension.2	W4.White		0,75 mm²	
59	Landing_Block.2	W6.White		0,75 mm²	
60	Electric_Drive_FuseBox_B1.C	W54.White		0,75 mm²	≥ 0,5 m
65	12V	W43.Red		2,5 mm²	
66	Supply.B	W44.Black		2,5 mm²	≥ 2 m

R1

From	To	Conductor	Color	Gauge
R1.NEG	Output_A	W9.White		0,75 mm²
R1.POS	Vcc	W93.Red		1 mm²

R2

From	To	Conductor	Color	Gauge
R2.NEG	Output_B	W11.White		0,75 mm²
R2.POS	Vcc	W92.Red		1 mm²


Splice_C1_47

From	To	Conductor	Color	Gauge
Splice_C1_47	Electric_Drive_FuseBox_B1.B	W84.Orange		1 mm²
Splice_C1_47	Electric_Drive_FuseBox_B1.D	W86.Orange		1 mm²
Splice_C1_47	Main_MC42.47	W15.White		0,75 mm²
Splice_C1_47	Splice_C1_47_Distributeur	W83.Orange		1 mm²

IDTAG_1

Cavity	To	Conductor	Color	Gauge
1	Main_MC42.20	W49.White		0,75 mm²
2	Main_MC42.4	W50.White		0,75 mm²

Pièce fourni à connecter avec des monchons

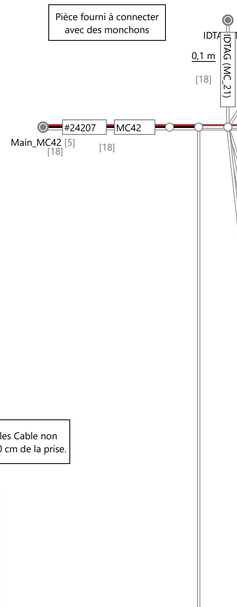

Supply

Cavity	To	Conductor	Color	Gauge
A	12V	W58.Red		2,5 mm²
B	Main_MC42.66	W44.Black		2,5 mm²

Vcc

From	To	Conductor	Color	Gauge
Vcc	12V	W94.Red		1 mm²
Vcc	Ladder_hal_captor.A	W65.Red		1 mm²
Vcc	R1.POS	W93.Red		1 mm²
Vcc	R2.POS	W92.Red		1 mm²

Output_A

From	To	Conductor	Color	Gauge
Output_A	Ladder_hal_captor.C	W20.White		0,75 mm²
Output_A	Main_MC42.11	W55.White		0,75 mm²
Output_A	R1.NEG	W9.White		0,75 mm²

Output_B

From	To	Conductor	Color	Gauge
Output_B	Ladder_hal_captor.D	W10.White		0,75 mm²
Output_B	Main_MC42.12	W61.White		0,75 mm²
Output_B	R2.NEG	W11.White		0,75 mm²

Ladder_hal_captor

Cavity	To	Conductor	Color	Gauge
A	Vcc	W65.Red		1 mm²
B	Vref_Minus	W69.Black		1 mm²
C	Output_A	W20.White		0,75 mm²
D	Output_B	W10.White		0,75 mm²

Remote_Power_Box

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.28	W25.White		0,75 mm²
B	Main_MC42.29	W45.White		0,75 mm²

Electric_Drive_FuseBox_B1

Cavity	To	Conductor	Color	Gauge	Notes
A	Main_MC42.44	W53.White		0,75 mm²	Battery Power
B	Splice_C1_47	W84.Orange		1 mm²	
C	Main_MC42.60	W54.White		0,75 mm²	Variator Cmd
D	Splice_C1_47	W86.Orange		1 mm²	

Seat_Control

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.48	W51.White		0,75 mm²
B	Main_MC42.45	W52.White		0,75 mm²

Accelerometre

Cavity	To	Conductor	Color	Gauge
A	12V	W42.Red		1 mm²
B	Vref_Minus	W30.Black		1 mm²
D	Main_MC42.26	W46.White		0,75 mm²
E	Main_MC42.36	W47.White		0,75 mm²
F	Main_MC42.52	W48.White		0,75 mm²

Oil_Level

Cavity	To	Conductor	Color	Gauge
A	Splice_Oil_level	W36.Red		1 mm²
B	Vref_Minus	W28.Black		1 mm²

Water_Level

Cavity	To	Conductor	Color	Gauge
A	Splice_Water_level1	W38.Red		1 mm²
B	Vref_Minus	W29.Black		1 mm²


Bilge_Captor

Cavity	To	Conductor	Color	Gauge
A	Splice_Bilge_Level	W74.Red		1 mm²
B	Vref_Minus	W31.Black		1 mm²

Passer les cables de masses (bleu) des pompes de cales (hors watermagament) la bobine.

Distributeur
Ne pas réduire la longueur des fils blanc, des cables préfait. Les prises doivent être à la même distance.

UP coté vérin.

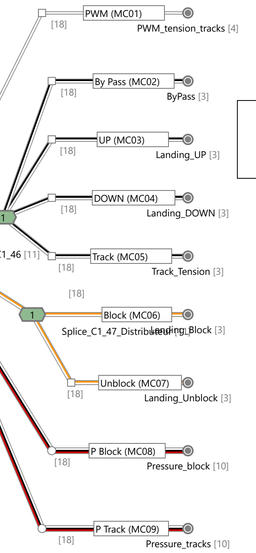

PWM_tension_tracks

Cavity	To	Conductor	Color	Gauge
1	Main_MC42.14	W12.White		0,75 mm²
2	Main_MC42.39	W13.White		0,75 mm²

ByPass

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W82.Black		1 mm²
2	Main_MC42.41	W1.White		0,75 mm²

Landing_UP

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W78.Black		1 mm²
2	Main_MC42.57	W2.White		0,75 mm²

Landing_DOWN

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W81.Black		1 mm²
2	Main_MC42.42	W3.White		0,75 mm²

Track_Tension

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_46	W80.Black		1 mm²
2	Main_MC42.58	W4.White		0,75 mm²

Landing_Block

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_47_Distributeur	W85.Orange		1 mm²
2	Main_MC42.59	W6.White		0,75 mm²

Landing_Unblock

Cavity	To	Conductor	Color	Gauge
1	Splice_C1_47_Distributeur	W87.Orange		1 mm²
2	Main_MC42.43	W5.White		0,75 mm²

Pressure_block

Cavity	To	Conductor	Color	Gauge
1	Vref_Minus_Distributor	W26.Black		1 mm²
2	Main_MC42.9	W17.White		0,75 mm²
3	Vref_Plus_Distributor	W32.Red		1 mm²

Pressure_tracks

Cavity	To	Conductor	Color	Gauge
1	Vref_Minus_Distributor	W27.Black		1 mm²
2	Main_MC42.10	W19.White		0,75 mm²
3	Vref_Plus_Distributor	W33.Red		1 mm²

12V

From	To	Conductor	Color	Gauge
12V	Accelerometre.A	W42.Red		1 mm²
12V	Main_MC42.65	W43.Red		2,5 mm²
12V	Supply.A	W58.Red		2,5 mm²
12V	Vcc	W94.Red		1 mm²

Couper les Cable non tuilisé à 30 cm de la prise.

Vref_Minus, Vref_Plus

From	To	Conductor	Color	Gauge
Vref_Minus	Accelerometre.B	W30.Black		1 mm²
Vref_Minus	Bilge_Captor.B	W31.Black		1 mm²
Vref_Minus	Ladder_hal_captor.B	W69.Black		1 mm²
Vref_Minus	Main_MC42.23	W60.White		0,75 mm²
Vref_Minus	Oil_Level.B	W28.Black		1 mm²
Vref_Minus	Vref_Minus_Distributor	W79.Black		1 mm²
Vref_Minus	Water_Level.B	W29.Black		1 mm²
Vref_Plus	Main_MC42.7	W59.White		0,75 mm²
Vref_Plus	R7.NEG	W34.Red		1 mm²
Vref_Plus	R9.NEG	W39.Red		1 mm²
Vref_Plus	R12.NEG	W76.Red		1 mm²
Vref_Plus	Vref_Plus_Distributor	W77.Red		1 mm²

R7

From	To	Conductor	Color	Gauge
R7.NEG	Vref_Plus	W34.Red		1 mm²
R7.POS	Splice_Oil_level	W35.Red		1 mm²

Splice_Oil_level

From	To	Conductor	Color	Gauge
Splice_Oil_level	Oil_Level.A	W36.Red		1 mm²
Splice_Oil_level	R7.POS	W35.Red		1 mm²
Splice_Oil_level	R8.NEG	W37.Red		1 mm²

R8

From	To	Conductor	Color	Gauge
R8.NEG	Splice_Oil_level	W37.Red		1 mm²
R8.POS	Main_MC42.8	W16.White		0,75 mm²

R9

From	To	Conductor	Color	Gauge
R9.NEG	Vref_Plus	W39.Red		1 mm²
R9.POS	Splice_Water_level1	W41.Red		1 mm²

Splice_Water_level1

From	To	Conductor	Color	Gauge
Splice_Water_level1	R9.POS	W41.Red		1 mm²
Splice_Water_level1	R10.NEG	W40.Red		1 mm²
Splice_Water_level1	Water_Level.A	W38.Red		1 mm²

R10

From	To	Conductor	Color	Gauge
R10.NEG	Splice_Water_level1	W40.Red		1 mm²
R10.POS	Main_MC42.24	W18.White		0,75 mm²

R12

From	To	Conductor	Color	Gauge
R12.NEG	Vref_Plus	W76.Red		1 mm²
R12.POS	Splice_Bilge_Level	W75.Red		1 mm²

Splice_Bilge_Level

From	To	Conductor	Color	Gauge
Splice_Bilge_Level	Bilge_Captor.A	W74.Red		1 mm²
Splice_Bilge_Level	R11.NEG	W68.Red		1 mm²
Splice_Bilge_Level	R12.POS	W75.Red		1 mm²

R11

From	To	Conductor	Color	Gauge
R11.NEG	Splice_Bilge_Level	W68.Red		1 mm²
R11.POS	Main_MC42.25	W73.White		1 mm²

Supply = alimentation
Water = eau
Level = niveau
Splice = épissure
Seat = fauteil
hal captor = capteur de vitesse
Ladder = echelle
Oil = huile
Track = chenille
Pressure = pression

CanBus_Main_to_MC4_10

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.17	W21.White		0,75 mm²
B	Main_MC42.1	W22.White		0,75 mm²

CanBus_ElectricDrive

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.18	W24.White		0,75 mm²
B	Main_MC42.2	W23.White		0,75 mm²

Can_Battery_HV

Cavity	To	Conductor	Color	Gauge
A	Main_MC42.19	W56.White		0,75 mm²
B	Main_MC42.3	W57.White		0,75 mm²

Vref_Plus_Distributor, Vref_Minus_Distributor


From	To	Conductor	Color	Gauge
Vref_Minus_Distributor	Pressure_block.1	W26.Black		1 mm²
Vref_Minus_Distributor	Pressure_tracks.1	W27.Black		1 mm²
Vref_Minus_Distributor	Vref_Minus	W79.Black		1 mm²
Vref_Plus_Distributor	Pressure_block.3	W32.Red		1 mm²
Vref_Plus_Distributor	Pressure_tracks.3	W33.Red		1 mm²
Vref_Plus_Distributor	Vref_Plus	W77.Red		1 mm²

Splice_C1_46


From	To	Conductor	Color	Gauge
Splice_C1_46	ByPass.1	W82.Black		1 mm²
Splice_C1_46	Landing_DOWN.1	W81.Black		1 mm²
Splice_C1_46	Landing_UP.1	W78.Black		1 mm²
Splice_C1_46	Main_MC42.46	W14.White		0,75 mm²
Splice_C1_46	Track_Tension.1	W80.Black		1 mm²


Splice_C1_47_Distributeur

From	To	Conductor	Color	Gauge
Splice_C1_47_Distributeur	Landing_Block.1	W85.Orange		1 mm²
Splice_C1_47_Distributeur	Landing_Unblock.1	W87.Orange		1 mm²
Splice_C1_47_Distributeur	Splice_C1_47	W83.Orange		1 mm²

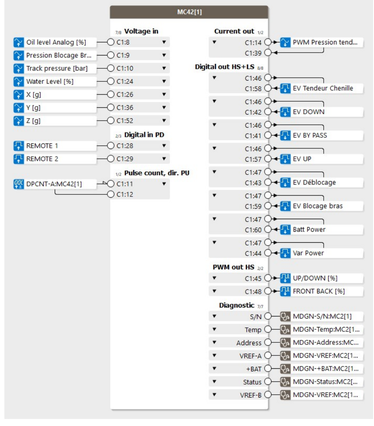

Wiring diagram





Bill of Materials

Id	Type	Manufacturer	Part Number	Quantity	Description
1	Connector		#21436 - Parker_IDTAG_1	1	5030061
2	Connector		#15960 - Delphi_150_6_way_female	1	829-12052848
3	Connector		#20694 - Phoenix_valve_2_way	6	651-1410723
4	Connector		#23554 - Phoenix_3_way_female	1	651-1402983
5	Connector		#24679 - Parker_C1_66_way	1	
6	Connector	Delphi	#15215 - Delphi_150_2_way_male	5	829-12162000
7	Connector	Delphi	#17183 - Delphi_480_2_way_male	1	829-12065863
8	Connector	Delphi	#17351 - Delphi_280_2_way_female	3	829-15300027
9	Connector	Delphi	#28050 - Delphi_150_4_way_female	2	829-12160482-B
10	Connector	TE	#12189 - Te_Timer_3_way_female	2	571-2821911
11	Splice		Generic Splice	14	Generic Splice
12	Wire		1mm² Black	≥ 2,8 m	
13	Wire		1mm² Red	≥ 2,8 m	
14	Wire		2.5mm² - Black	≥ 2 m	
15	Wire		2.5mm² - Red	≥ 2 m	
16	Wire		C1_Wire	≥ 11,8 m	
17	Wire		1mm² - White	≥ 0 in	
18	Label		Generic White Label	24	Generic Label
19	Wire		1 mm² - Orange		
20	Resistor		#21463 - 240 Ohm resistor	6	
21	Wire		1 mm² Orange	≥ 1 m	Generic Wire
22	Resistor		10 kOhm	2	

Title	#24207 - MC42_CAB (MC) - A1-Ind G		
Description		Revision	G

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.