Revisions			
Rev.	Date	Author	Description
A	21/01/2018	Florent de Labarre	
B	10/04/2018	Florent de Labarre	
C	25/05/2018	Florent de Labarre	
D	19/02/2019	Maxime Bouyssou	add annotation
E	20/08/2019	Florent de Labarre	add Interlock

MD4_C2_Black

Cavity	To	Conductor	Color	Gauge	From Contact PN	Length
1	Joystick_Left.3	W19.Orange		1 mm²	Contact deutsch DTMO6	0,5 m
2	Joystick_Right.3	W20.Orange		1 mm²	Contact deutsch DTMO6	0,5 m
3	Buzzer.Minus	W40.Black		1 mm²	Contact deutsch DTMO6	≥ 0,2 m
4	Button_ON_Cmd.D	W43.Black		1 mm²	Contact deutsch DTMO6	0,6 m
5	Button_OFF_Cmd.D	W42.Black		1 mm²	Contact deutsch DTMO6	0,6 m
6	Cabine_Button.B	W17.Orange		1 mm²	Contact deutsch DTMO6	1,6 m
7	Cabine_Button.D	W87.Green		1 mm²	Contact deutsch DTMO6	1,6 m
11	Supply_VREF	W55.Violet		1 mm²	Contact deutsch DTMO6	0,2 m
12	R1.POS	W51.Red		1 mm²	Contact deutsch DTMO6	≥ 0,1 m

Supply_VREF

From	To	Conductor	Color	Gauge
Supply_VREF	Joystick_Left.2	W53.Violet		1 mm²
Supply_VREF	Joystick_Right.2	W54.Violet		1 mm²
Supply_VREF	MD4_C2_Black.11	W55.Violet		1 mm²

From	To	Conductor	Color	Gauge
R1.NEG	Button_RTC_Power_Box.E	W57.Violet		1 mm²
R1.POS	MD4_C2_Black.12	W51.Red		1 mm²

From	To	Conductor	Color	Gauge
R2.NEG	Supply_0V	W44.Black		1 mm²
R2.POS	Button_RTC_Power_Box.F	W45.Black		1 mm²

From	To	Conductor	Color	Gauge
R3.NEG	Buzzer.Minus	W78.Black		1 mm²
R3.POS	Buzzer.Plus	W71.Red		1 mm²

Buzzer

Cavity	To	Conductor	Color	Gauge
Minus	MD4_C2_Black.3	W40.Black		1 mm²
Minus	R3.NEG	W78.Black		1 mm²
Plus	R3.POS	W71.Red		1 mm²
Plus	Supply_12V	W34.Red		1 mm²

Joystick_Left

Cavity	To	Conductor	Color	Gauge
1	Supply_0V	W41.Black		1 mm²
2	Supply_VREF	W53.Violet		1 mm²
3	MD4_C2_Black.1	W19.Orange		1 mm²

Joystick_Right

Cavity	To	Conductor	Color	Gauge
1	Supply_0V	W37.Black		1 mm²
2	Supply_VREF	W54.Violet		1 mm²
3	MD4_C2_Black.2	W20.Orange		1 mm²

Supply

Cavity	To	Conductor	Color	Gauge
A	Supply_12V	W26.Red		1 mm²
B	Supply_0V	W35.Black		1 mm²

Button_RTC_Power_Box

Cavity	To	Conductor	Color	Gauge
A	Button_ON_Cmd.A	W21.Orange		1 mm²
B	Button_ON_Cmd.B	W22.Orange		1 mm²
C	Button_OFF_Cmd.A	W16.White		1 mm²
D	Button_OFF_Cmd.B	W61.White		1 mm²
E	R1.NEG	W57.Violet		1 mm²
F	R2.POS	W45.Black		1 mm²

Button_ON

Cavity	To	Conductor	Color	Gauge
3	Button_ON_Harness.A	W33.Orange		1 mm²
4	Button_ON_Harness.B	W46.Orange		1 mm²
X1	Button_ON_Harness.C	W69.Red		1 mm²
X2	Button_ON_Harness.D	W79.Black		1 mm²

Button_OFF

Cavity	To	Conductor	Color	Gauge
1	Button_OFF_Harness.A	W58.White		1 mm²
2	Button_OFF_Harness.B	W60.White		1 mm²
X1	Button_OFF_Harness.C	W70.Red		1 mm²
X1_b	InterLock_Batt_HV.A	W89.Violet		1 mm²
X2	Button_OFF_Harness.D	W82.Black		1 mm²
X2_b	InterLock_Batt_HV.B	W90.Violet		1 mm²

MD4_C1_Grey

Cavity	To	Conductor	Color	Gauge	From Contact PN	Length
1	Supply_0V	W39.Black		1 mm²	Contact deutsch DTMO6	0,1 m
2	CanLow_Main	W3.Blue		1 mm²	Contact deutsch DTMO6	≥ 0,1 m
3	CanLow_Wifi_Key	W6.Blue		1 mm²	Contact deutsch DTMO6	0,2 m
4	CanBus_Garmin.B	W7.Blue		1 mm²	Contact deutsch DTMO6	1,4 m
5	CanBus_Spare.B	W59.Blue		1 mm²	Contact deutsch DTMO6	0,3 m
6	ID_TAG_Unit_0.1	W23.Orange		1 mm²	Contact deutsch DTMO6	0,1 m
7	ID_TAG_Unit_0.2	W24.Orange		1 mm²	Contact deutsch DTMO6	0,1 m
8	CanBus_Spare.A	W15.White		1 mm²	Contact deutsch DTMO6	0,3 m
9	CanBus_Garmin.A	W14.White		1 mm²	Contact deutsch DTMO6	1,4 m
10	CanHigh_Wifi_Key	W13.White		1 mm²	Contact deutsch DTMO6	0,2 m
11	CanHigh_Main	W8.White		1 mm²	Contact deutsch DTMO6	≥ 0,1 m
12	Supply_12V	W32.Red		1 mm²	Contact deutsch DTMO6	0,1 m

ID_TAG_Unit_0

Cavity	To	Conductor	Color	Gauge
1	MD4_C1_Grey.6	W23.Orange		1 mm²
2	MD4_C1_Grey.7	W24.Orange		1 mm²

Supply_0V, Supply_12V

From	To	Conductor	Color	Gauge
Supply_0V	Cabine_Button.C	W84.Black		1 mm²
Supply_0V	CanBus_MC42.C	W25.Black		1 mm²
Supply_0V	Joystick_Left.1	W41.Black		1 mm²
Supply_0V	Joystick_Right.1	W37.Black		1 mm²
Supply_0V	MD4_C1_Grey.1	W39.Black		1 mm²
Supply_0V	Modem_G11.1	W36.Black		1 mm²
Supply_0V	R2.NEG	W44.Black		1 mm²
Supply_0V	Supply.B	W35.Black		1 mm²
Supply_0V	Wifi_Supply_CanBus.B	W38.Black		1 mm²
Supply_12V	Button_OFF_Cmd.C	W31.Red		1 mm²
Supply_12V	Button_ON_Cmd.C	W30.Red		1 mm²
Supply_12V	Buzzer.Plus	W34.Red		1 mm²
Supply_12V	Cabine_Button.A	W28.Red		1 mm²
Supply_12V	MD4_C1_Grey.12	W32.Red		1 mm²
Supply_12V	Modem_G11.2	W47.Red		1 mm²
Supply_12V	Supply.A	W26.Red		1 mm²
Supply_12V	Wifi_Supply_CanBus.A	W27.Red		1 mm²

From	To	Conductor	Color	Gauge
InterLock_Batt_HV.A	Button_OFF.X1_b	W89.Violet		1 mm²
InterLock_Batt_HV.B	Button_OFF.X2_b	W90.Violet		1 mm²

Button_ON_Harness

Cavity	To	Conductor	Color	Gauge
A	Button_ON.3	W33.Orange		1 mm²
B	Button_ON.4	W46.Orange		1 mm²
C	Button_ON.X1	W69.Red		1 mm²
D	Button_ON.X2	W79.Black		1 mm²

Button_OFF_Harness

Cavity	To	Conductor	Color	Gauge
A	Button_OFF.1	W58.White		1 mm²
B	Button_OFF.2	W60.White		1 mm²
C	Button_OFF.X1	W70.Red		1 mm²
D	Button_OFF.X2	W82.Black		1 mm²

CanHigh_Main, CanLow_Main

From	To	Conductor	Color	Gauge
CanHigh_Main	CanBus_MC42.A	W10.White		1 mm²
CanHigh_Main	MD4_C1_Grey.11	W8.White		1 mm²
CanHigh_Main	Modem_G11.4	W9.White		1 mm²
CanLow_Main	CanBus_MC42.B	W2.Blue		1 mm²
CanLow_Main	MD4_C1_Grey.2	W3.Blue		1 mm²
CanLow_Main	Modem_G11.3	W1.Blue		1 mm²

CanBus_MC42

Cavity	To	Conductor	Color	Gauge
A	CanHigh_Main	W10.White		1 mm²
B	CanLow_Main	W2.Blue		1 mm²
C	Supply_0V	W25.Black		1 mm²

CanBus_Garmin

Cavity	To	Conductor	Color	Gauge
A	MD4_C1_Grey.9	W14.White		1 mm²
B	MD4_C1_Grey.4	W7.Blue		1 mm²

Wifi_Supply_CanBus

Cavity	To	Conductor	Color	Gauge
A	Supply_12V	W27.Red		1 mm²
B	Supply_0V	W38.Black		1 mm²
C	CanHigh_Wifi_Key	W11.White		1 mm²
D	CanLow_Wifi_Key	W4.Blue		1 mm²

CanBus_KeyBox

Cavity	To	Conductor	Color	Gauge
A	CanHigh_Wifi_Key	W12.White		1 mm²
B	CanLow_Wifi_Key	W5.Blue		1 mm²

Button_ON_Cmd

Cavity	To	Conductor	Color	Gauge
A	Button_RTC_Power_Box.A	W21.Orange		1 mm²
B	Button_RTC_Power_Box.B	W22.Orange		1 mm²
C	Supply_12V	W30.Red		1 mm²
D	MD4_C2_Black.4	W43.Black		1 mm²

Button_OFF_Cmd

Cavity	To	Conductor	Color	Gauge
A	Button_RTC_Power_Box.C	W16.White		1 mm²
B	Button_RTC_Power_Box.D	W61.White		1 mm²
C	Supply_12V	W31.Red		1 mm²
D	MD4_C2_Black.5	W42.Black		1 mm²

CanHigh_Wifi_Key, CanLow_Wifi_Key

From	To	Conductor	Color	Gauge
CanHigh_Wifi_Key	CanBus_KeyBox.A	W12.White		1 mm²
CanHigh_Wifi_Key	MD4_C1_Grey.10	W13.White		1 mm²
CanHigh_Wifi_Key	Wifi_Supply_CanBus.C	W11.White		1 mm²
CanLow_Wifi_Key	CanBus_KeyBox.B	W5.Blue		1 mm²
CanLow_Wifi_Key	MD4_C1_Grey.3	W6.Blue		1 mm²
CanLow_Wifi_Key	Wifi_Supply_CanBus.D	W4.Blue		1 mm²

CanBus_Spare

Cavity	To	Conductor	Color	Gauge
A	MD4_C1_Grey.8	W15.White		1 mm²
B	MD4_C1_Grey.5	W59.Blue		1 mm²

Cabine_Button

From	Cavity	To	Conductor	Color	Gauge
Cabine_Button.A	A	Supply_12V	W28.Red		1 mm²
Cabine_Button.B	B	MD4_C2_Black.6	W17.Orange		1 mm²
Cabine_Button.C	C	Supply_0V	W84.Black		1 mm²
Cabine_Button.D	D	MD4_C2_Black.7	W87.Green		1 mm²

From	To	Conductor	Color	Gauge	From Contact PN
Cabine_Button_harness.A	Button_12V	W72.Red		1 mm²	
Cabine_Button_harness.B	Button_Light_Yellow.C2	W49.Orange		1 mm²	
Cabine_Button_harness.C	Button_0V	W80.Black		1 mm²	
Cabine_Button_harness.D	Button_Door_green.C2	W88.Green		1 mm²	


From	To	Conductor	Color	Gauge
Button_0V	Button_Door_green.0V	W81.Black		1 mm²
Button_0V	Button_Light_Yellow.0V	W83.Black		1 mm²
Button_0V	Cabine_Button_harness.C	W80.Black		1 mm²
Button_12V	Button_Door_green.12V	W75.Red		1 mm²
Button_12V	Button_Door_green.C1	W76.Red		1 mm²
Button_12V	Button_Light_Yellow.12V	W73.Red		1 mm²
Button_12V	Button_Light_Yellow.C1	W74.Red		1 mm²
Button_12V	Cabine_Button_harness.A	W72.Red		1 mm²

Modem_G11

Cavity	To	Conductor	Color	Gauge
1	Supply_0V	W36.Black		1 mm²
2	Supply_12V	W47.Red		1 mm²
3	CanLow_Main	W1.Blue		1 mm²
4	CanHigh_Main	W9.White		1 mm²

From	To	Conductor	Color	Gauge
Button_Door_green.0V	Button_0V	W81.Black		1 mm²
Button_Door_green.12V	Button_12V	W75.Red		1 mm²
Button_Door_green.C1	Button_12V	W76.Red		1 mm²
Button_Door_green.C2	Cabine_Button_harness.D	W88.Green		1 mm²

From	To	Conductor	Color	Gauge
Button_Light_Yellow.0V	Button_0V	W83.Black		1 mm²
Button_Light_Yellow.12V	Button_12V	W73.Red		1 mm²
Button_Light_Yellow.C1	Button_12V	W74.Red		1 mm²
Button_Light_Yellow.C2	Cabine_Button_harness.B	W49.Orange		1 mm²

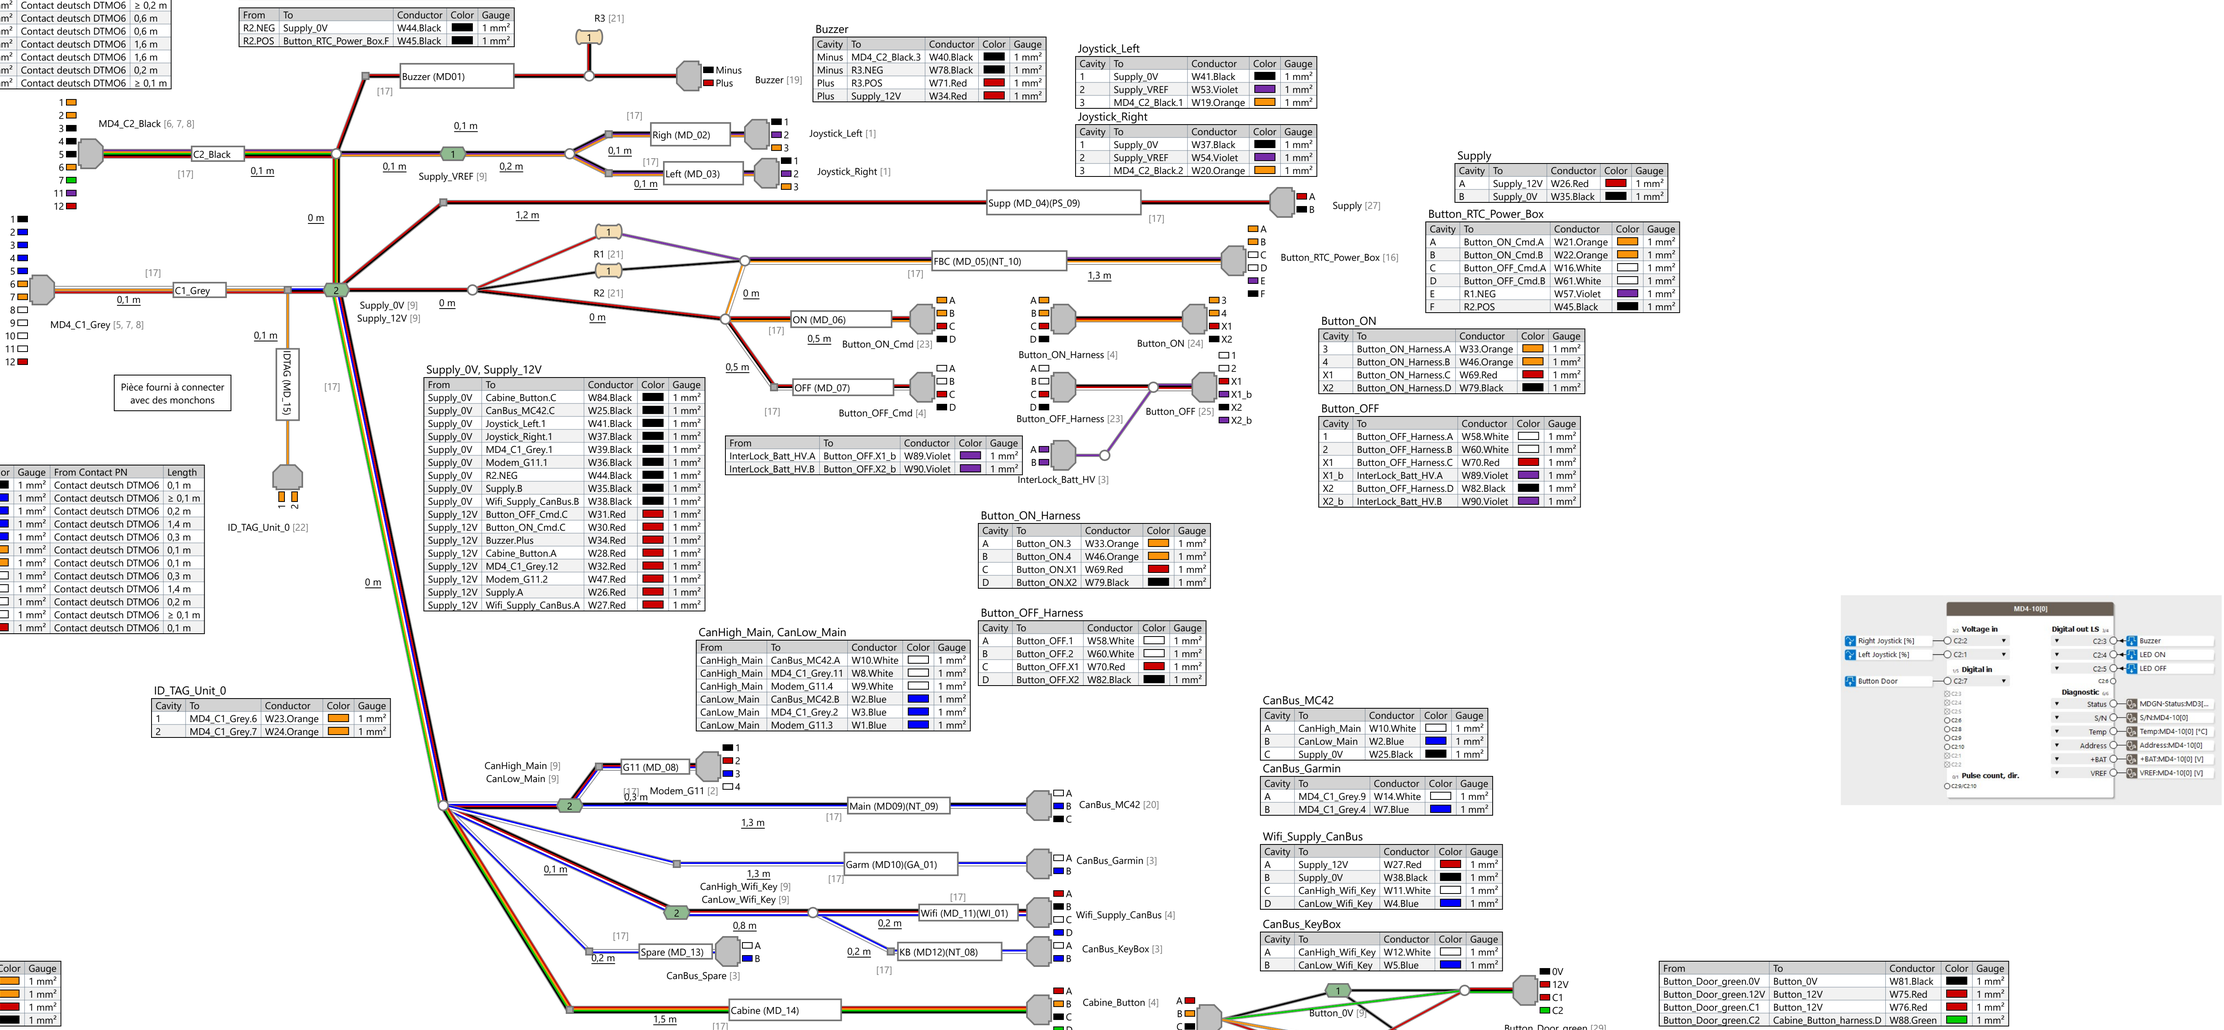

Bill of Materials

Id	Type	Manufacturer	Part Number	Quantity	Description
1	Connector		# 19975 - Automotive Connectors 4P J-P-TIM GEH KPL	2	571-1-963207-1
2	Connector		#29830 - Connector 4 voie Deutsch DT06-4S	1	915-6553
3	Connector	Delphi	#15215 - Delphi_150_2_way_male	4	829-12162000
4	Connector	Delphi	#28050 - Delphi_150_4_way_female	4	829-12160482-B
5	Connector	Deutsh	#17593 - DEUTSCH DTM06-12SA FICHE DTM GRIS A KEY 12VOIES	1	571-DTM06-12SA
6	Connector	Deutsh	#19047 - DEUTSCH DTM06-12SB FICHE DTM NOIR B KEY 12VOIES	1	571-DTM06-12SB
7	Contact	DEUTSCH	Contact deutsch DTMO6	24	#11235 - 571-0462-201-20141
8	Lock	DEUTSCH	DTM WEDGELOCK 12 WAY PLUG	2	#14923 - 571-WM-12S
9	Splice		Generic Splice	9	Generic Splice
10	Wire		1 mm² - Orange	6,4 m	
11	Wire		1 mm² Purple	≥ 2,1 m	
12	Wire		1mm² - Blue	≥ 5,6 m	
13	Wire		1mm² - White	≥ 7,4 m	
14	Wire		1mm² Black	≥ 9 m	
15	Wire		1mm² Red	≥ 5,4 m	
16	Connector		#15960 - Delphi_150_6_way_female	1	829-12052848
17	Label		Generic White Label	17	Generic Label
18	Wire		1 mm² White	1,8 m	Generic Wire
19	Connector		#23114- Buzzer	1	511-7636
20	Connector	Delphi	#15412 - Delphi_150_3_way_male	1	829-12129615
21	Resistor		1.5 kOhm	3	
22	Connector	Parker	#20095- Adress Id-Tags #0	1	5030160
23	Connector	Delphi	#26525 - Delphi_150_4_way_male	3	829-12160825
24	Connector		Button_ON	1	
25	Connector		Button_OFF	1	
26	Wire		1 mm² Orange	≥ 0 in	Generic Wire
27	Connector	Delphi	#17183 - Delphi_480_2_way_male	1	829-12065863
28	Wire		1 mm² Green	≥ 1,6 m	Generic Wire
29	Connector		Bouton Lumineu	2	
30	Wire		1 mm² Violet	≥ 0 in	Generic Wire

Title	#26062 - MD4-10 (Screen) (MD) - A1		
Description		Revision	----
Drawn		----	----
Eng Approved		----	----
Mfg Approved		----	----
QA		----	----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.