| Revisions | | | |
|---|---|---|---|
| Rev. | Date | Author | Description |
| A | 21/01/2018 | Florent de Labarre | Creation |

## Main_MC42

| Cavity | To | Conductor | Color | Gauge | Length |
|---|---|---|---|---|---|
| 1 | CanBus_Main_to_MC4_10.B | W22.White | | 0,75 mm² | ≥ 1,5 m |
| 2 | J1939.B | W23.White | | 0,75 mm² | ≥ 1,5 m |
| 3 | Can_Drive.B | W57.White | | 0,75 mm² | ≥ 0,5 m |
| 4 | IDTAG_1.2 | W50.White | | 0,75 mm² | ≥ 0,1 m |
| 7 | Vref_Plus | W59.White | | 0,75 mm² | |
| 8 | R8.POS | W16.White | | 0,75 mm² | |
| 9 | Pressure_block.2 | W17.White | | 0,75 mm² | |
| 10 | Pressure_tracks.2 | W19.White | | 0,75 mm² | |
| 17 | CanBus_Main_to_MC4_10.A | W21.White | | 0,75 mm² | ≥ 1,5 m |
| 18 | J1939.A | W24.White | | 0,75 mm² | ≥ 1,5 m |
| 19 | Can_Drive.A | W56.White | | 0,75 mm² | ≥ 0,5 m |
| 20 | IDTAG_1.1 | W49.White | | 0,75 mm² | ≥ 0,1 m |
| 23 | Vref_Minus | W60.White | | 0,75 mm² | |
| 41 | ByPass.2 | W1.White | | 0,75 mm² | |
| 42 | Landing_DOWN.2 | W3.White | | 0,75 mm² | |
| 43 | Landing_Unblock.2 | W5.White | | 0,75 mm² | |
| 44 | Electric_Drive_FuseBox_B1.A | W7.White | | 0,75 mm² | |
| 46 | Splice_C1_46 | W14.White | | 0,75 mm² | |
| 47 | Splice_C1_47 | W15.White | | 0,75 mm² | |
| 57 | Landing_UP.2 | W2.White | | 0,75 mm² | |
| 58 | Track_Tension.2 | W4.White | | 0,75 mm² | |
| 59 | Landing_Block.2 | W6.White | | 0,75 mm² | |
| 60 | Electric_Drive_FuseBox_B1.C | W8.White | | 0,75 mm² | |
| 65 | 12V | W43.Red | | 2,5 mm² | |
| 66 | Supply.B | W44.Black | | 2,5 mm² | ≥ 2 m |

Couper les Cable non tuilisé à 30 cm de la prise.

## IDTAG_1

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Main_MC42.20 | W49.White | | 0,75 mm² |
| 2 | Main_MC42.4 | W50.White | | 0,75 mm² |

Pièce fourni à connecter avec des monchons

IDTAG_1 [2]

[9]

IDTAG (MC 12) [1]

Main_MC42 [3]

MC42

[9]

Supply (MC16)(MD05)

[9]

Supply [5]

## Supply

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| A | 12V | W58.Red | | 2,5 mm² |
| B | Main_MC42.66 | W44.Black | | 2,5 mm² |

## 12V

2 m

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 12V | Main_MC42.65 | W43.Red | | 2,5 mm² |
| 12V | Supply.A | W58.Red | | 2,5 mm² |

12V [11]

Splice_C1_47 [11]

## Splice_C1_47

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| Splice_C1_47 | Electric_Drive_FuseBox_B1.B | W86.Orange | | 1 mm² |
| Splice_C1_47 | Electric_Drive_FuseBox_B1.D | W10.Orange | | 1 mm² |
| Splice_C1_47 | Main_MC42.47 | W15.White | | 0,75 mm² |
| Splice_C1_47 | Splice_C1_47_Distributeur | W83.Orange | | 1 mm² |

Vref_Minus [11]
Vref_Plus [11]

R7 [10]

Splice_Oil_level [11]

R8 [10]

Oil (MC17)(GW01)

0,6 m

[9]

Oil_Level [6]

## Oil_Level

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| A | Splice_Oil_level | W36.Red | | 1 mm² |
| B | Vref_Minus | W28.Black | | 1 mm² |

## R7

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| R7.NEG | Vref_Plus | W34.Red | | 1 mm² |
| R7.POS | Splice_Oil_level | W35.Red | | 1 mm² |

## R8

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| R8.NEG | Splice_Oil_level | W37.Red | | 1 mm² |
| R8.POS | Main_MC42.8 | W16.White | | 0,75 mm² |

## Splice_Oil_level

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| Splice_Oil_level | Oil_Level.A | W36.Red | | 1 mm² |
| Splice_Oil_level | R7.POS | W35.Red | | 1 mm² |
| Splice_Oil_level | R8.NEG | W37.Red | | 1 mm² |

## Vref_Minus, Vref_Plus

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| Vref_Minus | Main_MC42.23 | W60.White | | 0,75 mm² |
| Vref_Minus | Oil_Level.B | W28.Black | | 1 mm² |
| Vref_Minus | Vref_Minus_Distributor | W79.Black | | 1 mm² |
| Vref_Plus | Main_MC42.7 | W59.White | | 0,75 mm² |
| Vref_Plus | R7.NEG | W34.Red | | 1 mm² |
| Vref_Plus | Vref_Plus_Distributor | W77.Red | | 1 mm² |

Main (MC_18)(MD_09)

1,5 m [9]

CanBus_Main_to_MC4_10 [4]

J1939 (MC_19)(FBA_03)

1,5 m

[9]

J1939 [4]

Can_Drive (MC20)(FE03)

0,5 m

[9]

Can_Drive [4]

## CanBus_Main_to_MC4_10

| Cavity | To | Conductor | Color | Gauge | Twisted With |
|---|---|---|---|---|---|
| A | Main_MC42.17 | W21.White | | 0,75 mm² | W22 |
| B | Main_MC42.1 | W22.White | | 0,75 mm² | W21 |

## J1939

| Cavity | To | Conductor | Color | Gauge | Twisted With |
|---|---|---|---|---|---|
| A | Main_MC42.18 | W24.White | | 0,75 mm² | W23 |
| B | Main_MC42.2 | W23.White | | 0,75 mm² | W24 |

## Can_Drive

| Cavity | To | Conductor | Color | Gauge | Twisted With |
|---|---|---|---|---|---|
| A | Main_MC42.19 | W56.White | | 0,75 mm² | W57 |
| B | Main_MC42.3 | W57.White | | 0,75 mm² | W56 |

Supply = alimentation
Water = eau
Level = niveau
Splice = épissure
Seat = fauteil
hal captor = capteur de vitesse
Ladder = echelle
Oil = huile
Track = chenille
Pressure = pression

Electric_Drive_FuseBox_B1 [7]

## Electric_Drive_FuseBox_B1

| Cavity | To | Conductor | Color | Gauge | Notes |
|---|---|---|---|---|---|
| A | Main_MC42.44 | W7.White | | 0,75 mm² | Battery Reset |
| B | Splice_C1_47 | W86.Orange | | 1 mm² | |
| C | Main_MC42.60 | W8.White | | 0,75 mm² | |
| D | Splice_C1_47 | W10.Orange | | 1 mm² | |

Splice_C1_46 [11]

Vref_Plus_Distributor [11]
Vref_Minus_Distributor [11]

By Pass (MC01) [9] — ByPass [1]

UP (MC02) [9] — Landing_UP [1]

DOWN (MC03) [9] — Landing_DOWN [1]

Track (MC04) [9] — Track_Tension [1]

Block (MC05) [9] — Landing_Block [1]

Splice_C1_47_Distributeur [11]

Unblock (MC06) [9] — Landing_Unblock [1]

P Block (MC08) [9] — Pressure_block [8]

P Track (MC09) [9] — Pressure_tracks [8]

## ByPass

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Splice_C1_46 | W82.Black | | 1 mm² |
| 2 | Main_MC42.41 | W1.White | | 0,75 mm² |

## Landing_UP

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Splice_C1_46 | W78.Black | | 1 mm² |
| 2 | Main_MC42.57 | W2.White | | 0,75 mm² |

## Landing_DOWN

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Splice_C1_46 | W81.Black | | 1 mm² |
| 2 | Main_MC42.42 | W3.White | | 0,75 mm² |

## Track_Tension

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Splice_C1_46 | W80.Black | | 1 mm² |
| 2 | Main_MC42.58 | W4.White | | 0,75 mm² |

## Landing_Block

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Splice_C1_47_Distributeur | W85.Orange | | 1 mm² |
| 2 | Main_MC42.59 | W6.White | | 0,75 mm² |

## Landing_Unblock

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Splice_C1_47_Distributeur | W87.Orange | | 1 mm² |
| 2 | Main_MC42.43 | W5.White | | 0,75 mm² |

## Pressure_block

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Vref_Minus_Distributor | W26.Black | | 1 mm² |
| 2 | Main_MC42.9 | W17.White | | 0,75 mm² |
| 3 | Vref_Plus_Distributor | W32.Red | | 1 mm² |

## Pressure_tracks

| Cavity | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| 1 | Vref_Minus_Distributor | W27.Black | | 1 mm² |
| 2 | Main_MC42.10 | W19.White | | 0,75 mm² |
| 3 | Vref_Plus_Distributor | W33.Red | | 1 mm² |

## Vref_Plus_Distributor, Vref_Minus_Distributor

| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| Vref_Minus_Distributor | Pressure_block.1 | W26.Black | | 1 mm² |
| Vref_Minus_Distributor | Pressure_tracks.1 | W27.Black | | 1 mm² |
| Vref_Minus_Distributor | Vref_Minus | W79.Black | | 1 mm² |
| Vref_Plus_Distributor | Pressure_block.3 | W32.Red | | 1 mm² |
| Vref_Plus_Distributor | Pressure_tracks.3 | W33.Red | | 1 mm² |
| Vref_Plus_Distributor | Vref_Plus | W77.Red | | 1 mm² |


## Splice_C1_46

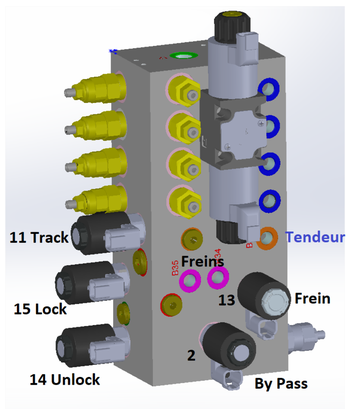
| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| Splice_C1_46 | ByPass.1 | W82.Black | | 1 mm² |
| Splice_C1_46 | Landing_DOWN.1 | W81.Black | | 1 mm² |
| Splice_C1_46 | Landing_UP.1 | W78.Black | | 1 mm² |
| Splice_C1_46 | Main_MC42.46 | W14.White | | 0,75 mm² |
| Splice_C1_46 | Track_Tension.1 | W80.Black | | 1 mm² |

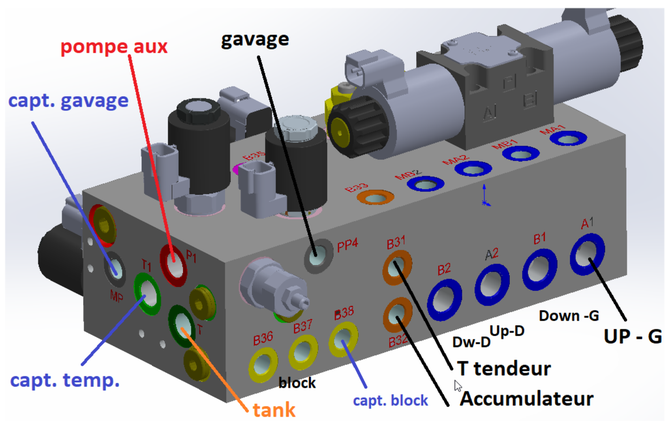
## Splice_C1_47_Distributeur

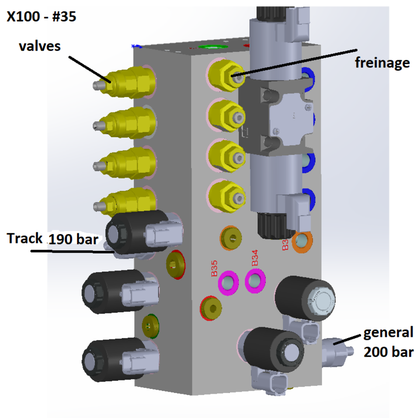
| From | To | Conductor | Color | Gauge |
|---|---|---|---|---|
| Splice_C1_47_Distributeur | Landing_Block.1 | W85.Orange | | 1 mm² |
| Splice_C1_47_Distributeur | Landing_Unblock.1 | W87.Orange | | 1 mm² |
| Splice_C1_47_Distributeur | Splice_C1_47 | W83.Orange | | 1 mm² |

**Wiring diagram**




## Bill of Materials

| Id | Type | Manufacturer | Part Number | Quantity | Description |
|---|---|---|---|---|---|
| 1 | Connector | | #20694 - Phoenix_valve_2_way | 6 | 651-1410723 |
| 2 | Connector | | #21436 - Parker_IDTAG_1 | 1 | 5030061 |
| 3 | Connector | | #24679 - Parker_C1_66_way | 1 | |
| 4 | Connector | Delphi | #15215 - Delphi_150_2_way_male | 3 | 829-12162000 |
| 5 | Connector | Delphi | #17183 - Delphi_480_2_way_male | 1 | 829-12065863 |
| 6 | Connector | Delphi | #17351 - Delphi_280_2_way_female | 1 | 829-15300027 |
| 7 | Connector | Delphi | #28050 - Delphi_150_4_way_female | 1 | 829-12160482-B |
| 8 | Connector | TE | #12189 - Te_Timer_3_way_female | 2 | 571-2821911 |
| 9 | Label | | Generic White Label | 15 | Generic Label |
| 10 | Resistor | | #21463 - 240 Ohm resistor | 2 | |
| 11 | Splice | | Generic Splice | 9 | Generic Splice |
| 12 | Wire | | 1 mm² - Orange | | |
| 13 | Wire | | 1 mm² Orange | | Generic Wire |
| 14 | Wire | | 1mm² - Blue | 0 in | |
| 15 | Wire | | 1mm² Black | ≥ 0,6 m | |
| 16 | Wire | | 1mm² Red | ≥ 0,6 m | |
| 17 | Wire | | 2.5mm² - Black | ≥ 2 m | |
| 18 | Wire | | 2.5mm² - Red | ≥ 2 m | |
| 19 | Wire | | C1_Wire | ≥ 7,2 m | |

| Title | #28580 - MC42_X100 Electric (xMCe) | | |
|---|---|---|---|
| Description | | Revision | ---- |

| | Name | Date |
|---|---|---|
| Drawn By | ---- | ---- |
| Eng Approved | ---- | ---- |
| Mfg Approved | ---- | ---- |
| QA | ---- | ---- |

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.