Revisions

Rev.	Date	Author	Description
A	23/12/2021	E.P	Creation nouvelle xFBAe pour batterie NovumTech (Sevcon)
B	27/04/2022	E.P	Corrections nom fusible DC/DC 12/24 et pinout relais (diode de roue libre) + Alim 87a relais Bat 12V entrée coupe batterie console
C	17/06/2022	E.P	Modifs erreur relais Var pinout 86 et 85
D	08-Nov-22	E.P	Adaptation pour faisceau xPSe
E	12-Jan-23	E.P	Modifs connecteur Emergency Brake

Splice_12V

From	To	Conductor	Color	Gauge
Splice_12V	FuseBox_FBA.A6	W6.Red		1.5 mm²
Splice_12V	FuseBox_FBA.A10	W90.Red		1.5 mm²
Splice_12V	FuseBox_FBA.C1	W2.Red		1.5 mm²
Splice_12V	Supply.A	W51.Red		4 mm²

Splice_0V

From	To	Conductor	Color	Gauge
Splice_0V	24V_Converter_10807.B	W79.Black		1.5 mm²
Splice_0V	Battery_350V.B	W78.Black		1.5 mm²
Splice_0V	Battery_350V.D	W81.Black		1.5 mm²
Splice_0V	Battery_350V.H	W54.Black		1 mm²
Splice_0V	Brake_Emergency_Left.B	W26.Black		1.5 mm²
Splice_0V	Brake_Emergency_Right.B	W83.Black		1.5 mm²
Splice_0V	Charger.B	W84.Black		1.5 mm²
Splice_0V	Controler_Pump.B	W9.Black		1 mm²
Splice_0V	FuseBox_FBA.B3	W27.Black		1.5 mm²
Splice_0V	Supply.B	W52.Black		4 mm²

FuseBox_FBA

Cavity	To	Conductor	Color	Gauge	Notes
A1	FuseBox_FBA.A4	W5.Red		1.5 mm²	Battery_Fuse_20A
A3	MC42_Cmd.D	W56.Orange		1 mm²	Cont_Relay_85
A4	FuseBox_FBA.A1	W5.Red		1.5 mm²	Battery_Fuse_20A
A5	Battery_350V.E	W24.Yellow		1.5 mm²	Battery_Fuse_20A
A6	Splice_12V	W6.Red		1.5 mm²	Charger_Fuse_20A
A7	Charger.A	W88.Red		1.5 mm²	Charger_Fuse_20A
A8	Battery_400V_Supply.B	W4.Red		1.5 mm²	
A9	Battery_350V.A	W53.Red		1.5 mm²	
A10	Splice_12V	W90.Red		1.5 mm²	
A11	Splice_Brake	W92.Red		1.5 mm²	
B1	MC42_Cmd.C	W15.Violet		1 mm²	Batt_Relay_86
B2	Battery_400V_Supply.A	W1.Red		1.5 mm²	Batt_Relay_87a
B3	Splice_0V	W27.Black		1.5 mm²	
B8	Battery_400V_Supply.C	W50.Red		1.5 mm²	
B9	Battery_350V.C	W25.Gray		1.5 mm²	
B10	24V_Converter_10807.A	W37.Gray		1.5 mm²	
B11	Splice_12V_Controller	W38.Gray		1.5 mm²	
C1	Splice_12V	W2.Red		1.5 mm²	Cont_Relay_30
C3	MC42_Cmd.A	W17.Green		1 mm²	Cont_Relay_86
C4	Splice_24V_Plus	W30.Green		1 mm²	Controler_1_Fuse_20A
C5	Controler_Right.A	W47.Green		1 mm²	Controler_1_Fuse_20A
C6	Splice_24V_Plus	W36.Green		1 mm²	Controler_2_Fuse_20A
C7	Controler_Left.A	W46.Green		1 mm²	Controler_2_Fuse_20A
C8	Splice_12V_Controller	W44.Red		1.5 mm²	Controler_3_Fuse_20A
C9	Controler_Pump.A	W91.Red		1.5 mm²	Controler_3_Fuse_20A
D1	MC42_Cmd.B	W55.Orange		1 mm²	Batt_Relay_85
D3	Splice_12V_Controller	W43.Red		1.5 mm²	Cont_relay_87

Splice_12V_Controller

From	To	Conductor	Color	Gauge
Splice_12V_Controller	FuseBox_FBA.B11	W38.Gray		1.5 mm²
Splice_12V_Controller	FuseBox_FBA.C8	W44.Red		1.5 mm²
Splice_12V_Controller	FuseBox_FBA.D3	W43.Red		1.5 mm²

Splice_24V_Plus

From	To	Conductor	Color	Gauge
Splice_24V_Plus	24V_Converter_10807.C	W45.Green		1 mm²
Splice_24V_Plus	FuseBox_FBA.C4	W30.Green		1 mm²
Splice_24V_Plus	FuseBox_FBA.C6	W36.Green		1 mm²

Splice_24V_Minus

From	To	Conductor	Color	Gauge
Splice_24V_Minus	24V_Converter_10807.D	W23.Black		1 mm²
Splice_24V_Minus	Controler_Left.B	W48.Black		1 mm²
Splice_24V_Minus	Controler_Right.B	W49.Black		1 mm²

Splice_Brake

From	To	Conductor	Color	Gauge
Splice_Brake	Brake_Emergency_Left.A	W93.Red		1.5 mm²
Splice_Brake	Brake_Emergency_Right.A	W108.Red		1.5 mm²
Splice_Brake	FuseBox_FBA.A11	W92.Red		1.5 mm²

Brake_Emergency_Left

Cavity	To	Conductor	Color	Gauge
A	Splice_Brake	W93.Red		1.5 mm²
B	Splice_0V	W26.Black		1.5 mm²

Brake_Emergency_Right

Cavity	To	Conductor	Color	Gauge
A	Splice_Brake	W108.Red		1.5 mm²
B	Splice_0V	W83.Black		1.5 mm²

Supply

Cavity	To	Conductor	Color	Gauge
A	Splice_12V	W51.Red		4 mm²
B	Splice_0V	W52.Black		4 mm²

Battery_400V_Supply

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.B2	W1.Red		1.5 mm²
B	FuseBox_FBA.A8	W4.Red		1.5 mm²
C	FuseBox_FBA.B8	W50.Red		1.5 mm²

MC42_Cmd

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.C3	W17.Green		1 mm²
B	FuseBox_FBA.D1	W55.Orange		1 mm²
C	FuseBox_FBA.B1	W15.Violet		1 mm²
D	FuseBox_FBA.A3	W56.Orange		1 mm²

CanBus_Drive_From_MC42

Cavity	To	Conductor	Color	Gauge
A	Splice_Can_High	W94.White		1 mm²
B	Splice_Can_Low	W106.Blue		1 mm²

Charger

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.A7	W88.Red		1.5 mm²
B	Splice_0V	W84.Black		1.5 mm²
C	Splice_Can_High	W96.White		1 mm²
D	Splice_Can_Low	W102.Blue		1 mm²

Battery_350V

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.A9	W53.Red		1.5 mm²
B	Splice_0V	W78.Black		1.5 mm²
C	FuseBox_FBA.B9	W25.Gray		1.5 mm²
D	Splice_0V	W81.Black		1.5 mm²
E	FuseBox_FBA.A5	W24.Yellow		1.5 mm²
F	Splice_Can_High	W20.White		1 mm²
G	Splice_Can_Low	W8.Blue		1 mm²
H	Splice_0V	W54.Black		1 mm²

Resistor_120_Ohm_J1939_F

Cavity	To	Conductor	Color	Gauge
A	Splice_Can_white	W11.White		1 mm²
B	Splice_Can_Blue	W12.Blue		1 mm²

Faire un pont avec la résistance 120 Ohm Protection avec étiquette

Resistor_120_Ohm_J1939_M

Cavity	To	Conductor	Color	Gauge
A	120_Ohm.POS	W14.White		1 mm²
B	120_Ohm.NEG	W13.Blue		1 mm²

CanBus_J1939_From_MC42

Cavity	To	Conductor	Color	Gauge
A	Splice_Can_white	W19.White		1 mm²
B	Splice_Can_Blue	W7.Blue		1 mm²

Controler_Pump

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.C9	W91.Red		1.5 mm²
B	Splice_0V	W9.Black		1 mm²
C	Splice_Can_white	W16.White		1 mm²
D	Splice_Can_Blue	W22.Blue		1 mm²

Controler_Left

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.C7	W46.Green		1 mm²
B	Splice_24V_Minus	W48.Black		1 mm²
C	Splice_Can_High	W97.White		1 mm²
D	Splice_Can_Low	W103.Blue		1 mm²

Controler_Right

Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.C5	W47.Green		1 mm²
B	Splice_24V_Minus	W49.Black		1 mm²
C	Splice_Can_High	W99.White		1 mm²
D	Splice_Can_Low	W105.Blue		1 mm²

KeyBox

Cavity	To	Conductor	Color	Gauge
A	Splice_Can_High	W21.White		1 mm²
B	Splice_Can_Low	W18.Blue		1 mm²

24V_Converter_10807


Cavity	To	Conductor	Color	Gauge
A	FuseBox_FBA.B10	W37.Gray		1.5 mm²
B	Splice_0V	W79.Black		1.5 mm²
C	Splice_24V_Plus	W45.Green		1 mm²
D	Splice_24V_Minus	W23.Black		1 mm²


Splice_Can_Low, Splice_Can_High

From	To	Conductor	Color	Gauge
Splice_Can_High	Battery_350V.F	W20.White		1 mm²
Splice_Can_High	CanBus_Drive_From_MC42.A	W94.White		1 mm²
Splice_Can_High	Charger.C	W96.White		1 mm²
Splice_Can_High	Controler_Left.C	W97.White		1 mm²
Splice_Can_High	Controler_Right.C	W99.White		1 mm²
Splice_Can_High	KeyBox.A	W21.White		1 mm²
Splice_Can_Low	Battery_350V.G	W8.Blue		1 mm²
Splice_Can_Low	CanBus_Drive_From_MC42.B	W106.Blue		1 mm²
Splice_Can_Low	Charger.D	W102.Blue		1 mm²
Splice_Can_Low	Controler_Left.D	W103.Blue		1 mm²
Splice_Can_Low	Controler_Right.D	W105.Blue		1 mm²
Splice_Can_Low	KeyBox.B	W18.Blue		1 mm²

Splice_Can_white, Splice_Can_Blue

From	To	Conductor	Color	Gauge
Splice_Can_Blue	CanBus_J1939_From_MC42.B	W7.Blue		1 mm²
Splice_Can_Blue	Controler_Pump.D	W22.Blue		1 mm²
Splice_Can_Blue	Resistor_120_Ohm_J1939_F.B	W12.Blue		1 mm²
Splice_Can_white	CanBus_J1939_From_MC42.A	W19.White		1 mm²
Splice_Can_white	Controler_Pump.C	W16.White		1 mm²
Splice_Can_white	Resistor_120_Ohm_J1939_F.A	W11.White		1 mm²

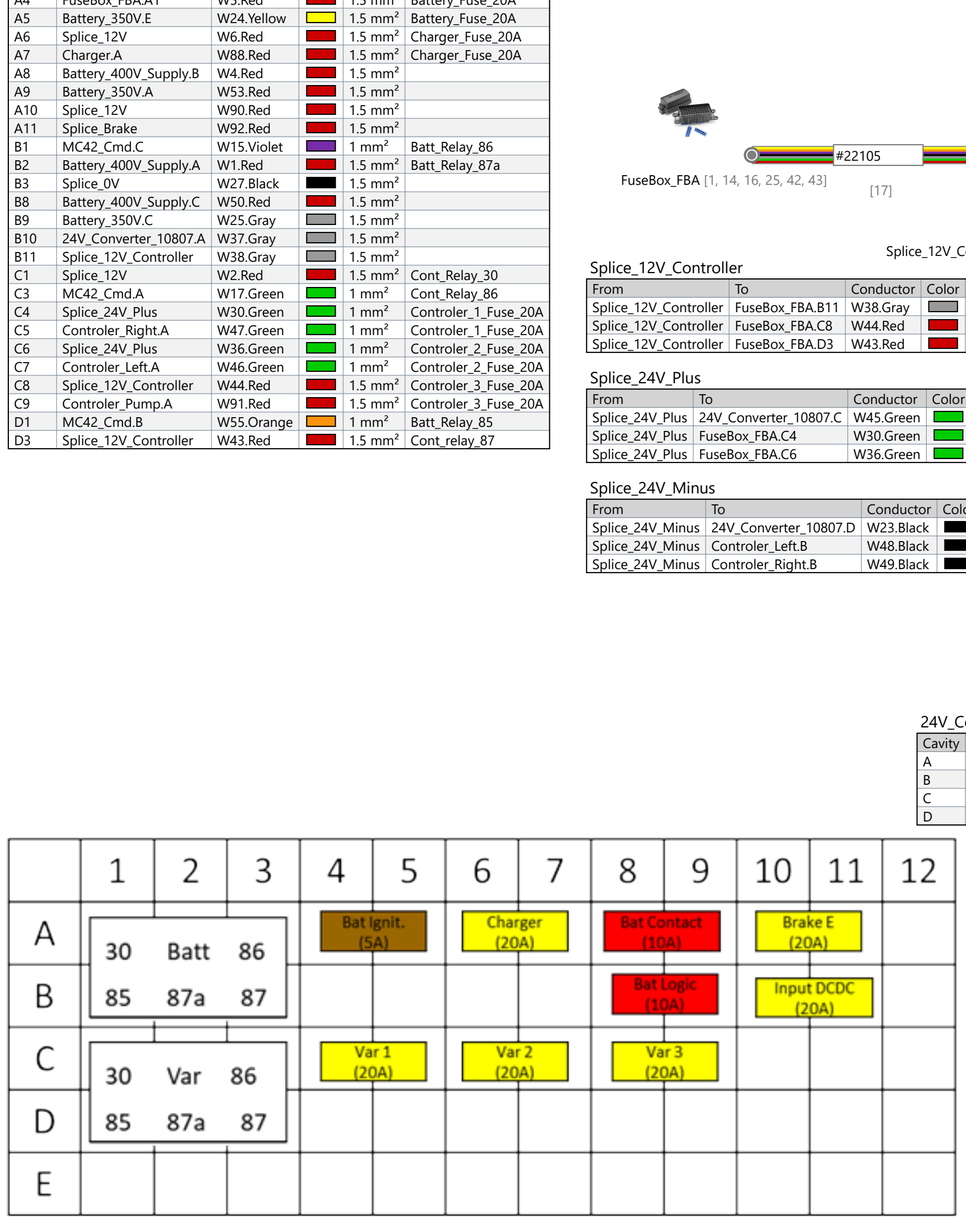

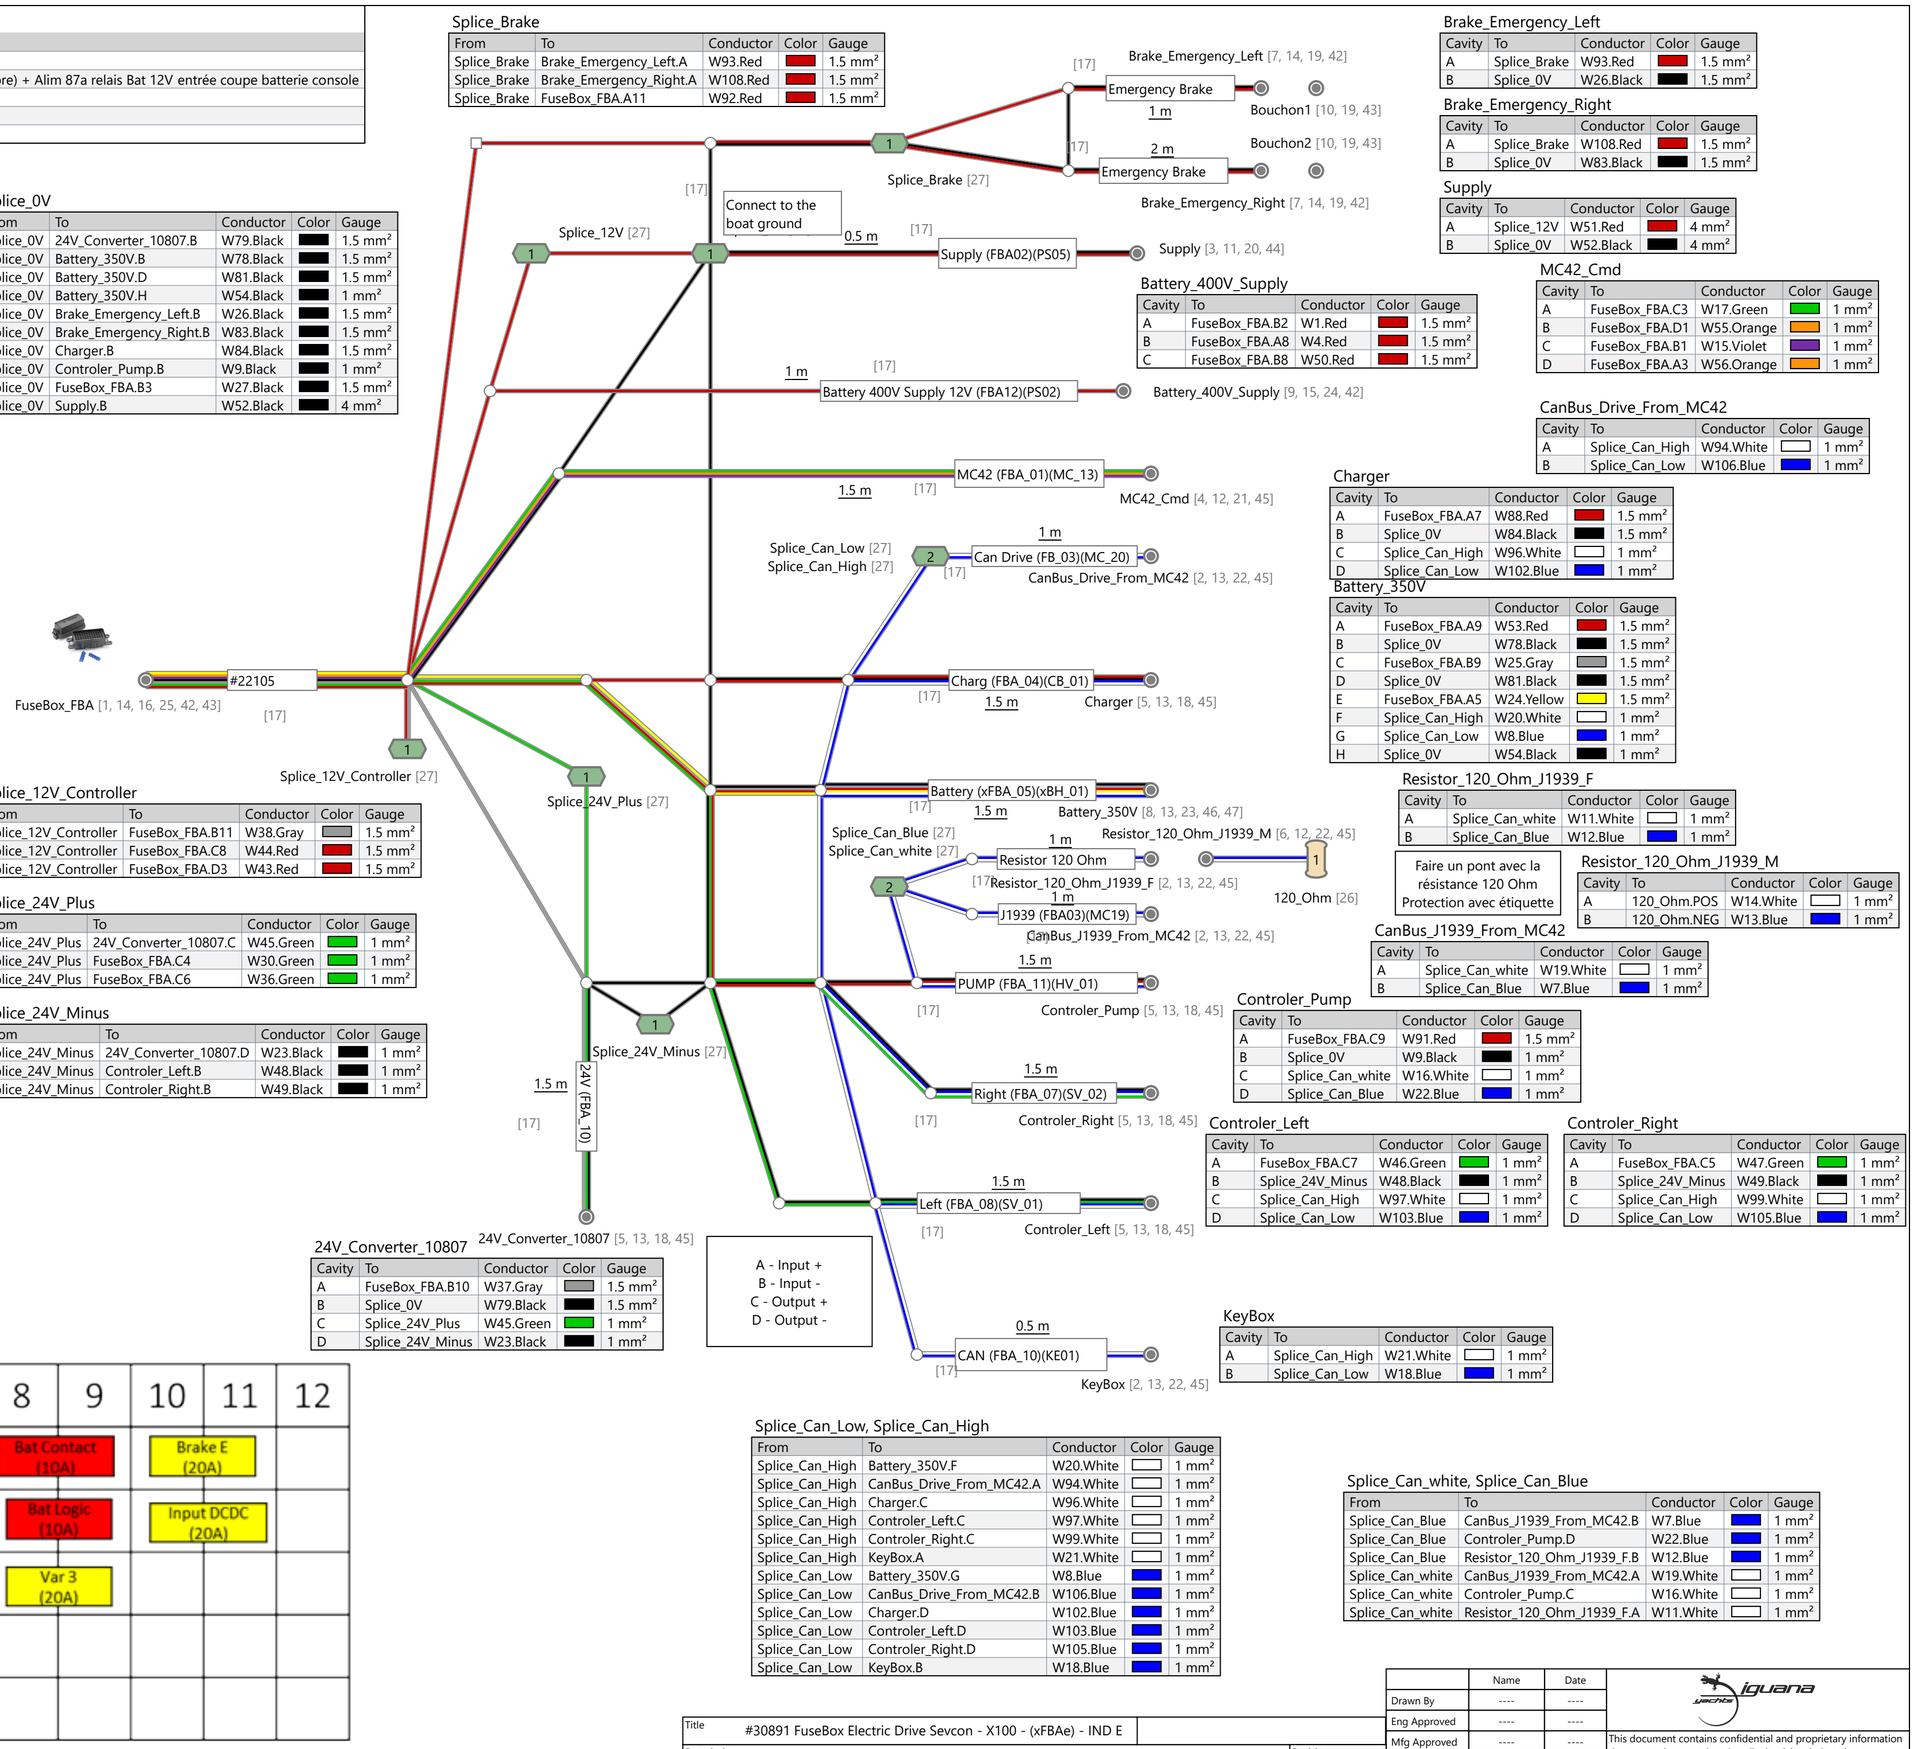

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

Title: #30891 FuseBox Electric Drive Sevcon - X100 - (xFBAe) - IND E

Description

Revision: ----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.

Title:	#30891 FuseBox Electric Drive Sevcon - X100 - (xFBAe) - IND E
Description:	

Id	Type	Part Number	Quantity	Description	Manufacturer
1	Connector	#26535 - Littelfuse_280_60_way_FuseBox	1	Littelfuse PDM21001LXM	Littelfuse
2	Connector	#14869 - Delphi_150_2_way_female	4	Delphi 12052641	Delphi
3	Connector	#17183 - Delphi_480_2_way_male	1	Delphi 12065863	Delphi
4	Connector	#26525 - Delphi_150_4_way_male	1	Delphi 12160825	Delphi
5	Connector	#28050 - Delphi_150_4_way_female	5	Delphi 12160482-B	Delphi
6	Connector	#15215 - Delphi_150_2_way_male	1	Delphi 12162000	Delphi
7	Connector	#17351 - Delphi_280_2_way_female	2	Delphi 15300027	Delphi
8	Connector	#13000 - Delphi_150_8_way_female	1	Delphi 12047937	Delphi
9	Connector	Delphi_280_3_way_male	1	#14168 - 829-15300003	Delphi
10	Connector	#16777 - Delphi_280_2_way_male	2	Delphi 15300002	Delphi
11	Contact	#17237 Delphi_480_contact_male 5mm² 3.49-5.24mm	2	Delphi 12052172	Delphi
12	Contact	#10019 Delphi_150_contact_male 0.5-1.0mm² 1.69-2.78mm	6	Delphi 12045773	Delphi
13	Contact	#13657 Delphi_150_contact_female 0.5-1.0mm² 2.03-2.80mm	36	Delphi 12048074	Delphi
14	Contact	#14173 Delphi_280_contact_female 2.0-3.0mm² 2.45-3.80mm	30	Delphi 12129493	Delphi
15	Contact	#13581 Delphi_280_contact_male 0.5-0.8mm² 1.69-2.78mm	3	Delphi 12048159	Delphi
16	Fuse	#20949 Fuse 20A Mini	8	Littelfuse 0297020.WXNV	Littelfuse
17	Label	Generic White Label	17	Generic Label	
18	Lock	#22024 - Delphi_150_4_way_female_lock	5	Delphi 12160480	Delphi
19	Lock	#18797 - Delphi_280_2_way_lock	4	Delphi 15300014-B	Delphi
20	Lock	#10273 - Delphi_480_2_way_lock	1	Delphi 12059897	Delphi
21	Lock	#23010 - Delphi_150_4_way_male_lock	1	Delphi 12176368	Delphi
22	Lock	#19468 - Delphi_150_2_way_lock	5	Delphi 12052634	Delphi
23	Lock	#12834 - Delphi_150_8_way_female_lock	1	Delphi 15324525	Delphi
24	Lock	#18566 - Delphi_280_3_Way_lock	1		
25	Relay	#36314 5 PIN SPDT sealed relay w/ suppress.diode Micro 280	2	Song Chuan 3011CSD112VDC	Song Chuan
26	Resistor	#27646 120Ω ±1%, 0.6W metal film resistor	1	TE Connectivity LR1F120R	TE Connectivity
27	Splice	Generic Splice	10	Generic Splice	
28	Wire	1 mm² - Orange	≥ 3 m		
29	Wire	1.5 mm² - Yellow	≥ 1.5 m		
30	Wire	1.5 mm² Black	≥ 1 m	Generic Wire	
31	Wire	1.5 mm² Gray	≥ 1.5 m	Generic Wire	
32	Wire	1.5mm² - Black	≥ 8 m		
33	Wire	1.5mm² - Red	≥ 10.5 m		
34	Wire	1mm² - Blue	≥ 11 m		
35	Wire	1mm² - White	≥ 11 m		
36	Wire	1mm² Black	≥ 7.5 m		
37	Wire	4 mm² - Black	0.5 m		
38	Wire	4 mm² - Red	≥ 0.5 m		
39	Wire	1.5mm² - Gray	≥ 1.5 m		
40	Wire	1 mm² Purple	≥ 1.5 m		
41	Wire	1mm² Green	≥ 6 m		
42	Wire Seal	#13381 - Delphi 280 Cable seal – Green– 2.03-2.85	33	Delphi 12015284	Delphi
43	Wire Seal	#19508 - Delphi 280 Cavity plug	38	Delphi 12010300	Delphi
44	Wire Seal	#15414 - Delphi 480 Cable seal – Red – 2.81-3.76	2	Delphi 12052452	Delphi
45	Wire Seal	#17898 - Delphi 150 Cable seal – White – 1.60-2.15	34	Delphi 12089442	Delphi
46	Wire Seal	#18901 - Delphi 150 Cable seal – Dark-red – 2.03-2.85	5	Delphi 12052924	Delphi
47	Wire Seal	#14820 - Delphi 150 Cable seal – Blue – 1.29-1.70	3	Delphi 12052925	Delphi