Simplified Arduino Nano pinout for MobiFlight
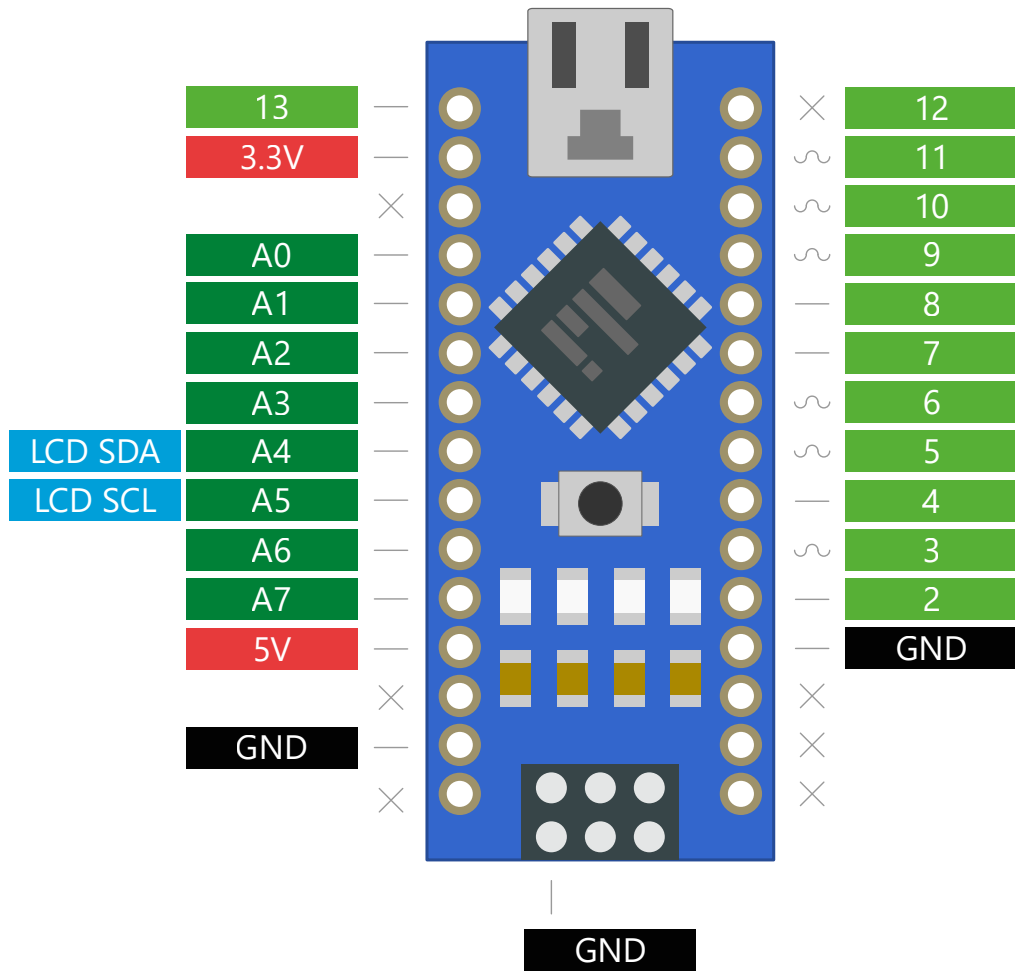
Power		(red)
Ground		(black)
Input / Output pin		(light green)
Analog capable pin		(dark green)
LCD display pins		(blue)
PWM capable pin	∿	
Pin is not used in MobiFlight	✕	

Left side (top to bottom):
- 13
- 3.3V
- ✕
- A0
- A1
- A2
- A3
- LCD SDA — A4
- LCD SCL — A5
- A6
- A7
- 5V
- ✕
- GND
- ✕

Right side (top to bottom):
- ✕ — 12
- ∿ — 11
- ∿ — 10
- ∿ — 9
- 8
- 7
- ∿ — 6
- ∿ — 5
- 4
- ∿ — 3
- 2
- GND
- ✕
- ✕
- ✕

Bottom: GND