Test case: AL-130


As an underwriter, the credit committee runs end to end on each application and saves one run record

Item	Detail
Story	AL-130: As an underwriter, the credit committee runs end to end on each application and saves one run record
Epic	AL-7 AI Credit Committee
Owner	Nic (al-ai: the committee flow and auto-start)
Sprint	Sprint 2 (27 Oct to 15 Nov 2026)
Wireframe	`wireframe.png` in this folder. AL-130 has no screen, so it is a flow diagram.
Code	`al-ai/app/committee.py`, `al-ai/app/auto_start.py`, `al-ai/app/retry_policy.py`, `al-ai/app/call_log.py` and `al-core/firestore.rules`, on `main` at commit `d1d1014`
Tested	13 Nov 2026, Nicholas Groenewald

What this tests

The committee runs its steps in a fixed order and saves one record per run. A step that keeps failing ends the run as failed with no recommendation, and a failed run can be re-run. When an application becomes Applied the run starts by itself, and a finished run moves it to AI Deliberated. Every call the run makes is saved in `ai_calls`.

Wireframe

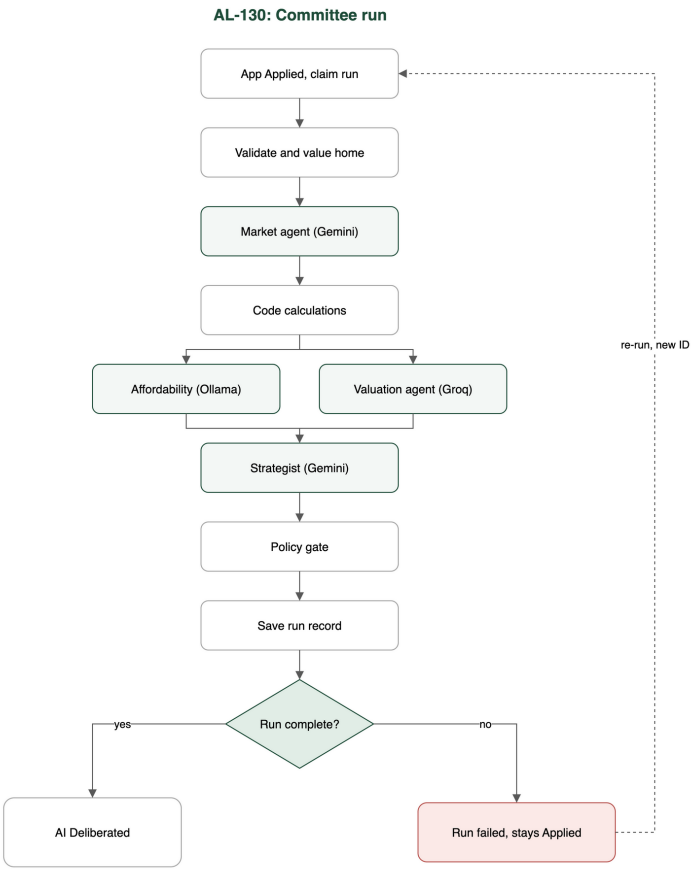

Preconditions and test data

- The `al-ai` dependencies are installed with `uv` (`cd al-ai && uv sync`). The saved valuation model is in `al-ai/models`.
- No API keys and no network are needed. The tests use fake Gemini, Groq and Ollama replies and a fake ECB rate cache.
- Test data is the made-up applications in `al-ai/app/committee_samples/` (one mortgage, one HELOC).
- Some tests need the Firestore emulator. They skip without it.
- A live run (real models and Serper) was not made for this test case.

Test cases

ID	Acceptance criterion	Steps	Expected result	Result and evidence
TC-130-01	The flow runs validate, valuation model, Market & Macro, code calculations, the affordability and valuation agents, strategist, policy gate, then save. Each step's input and output is kept in the run state.	1. Run the committee on the mortgage sample. 2. Check the step order and the step results.	The steps run in that order, with the two agents side by side, and every step has a result.	Pass. `test_committee.py`: `test_the_nodes_run_in_the_ticket_order_with_the_two_agents_side_by_side`, `test_the_run_state_holds_every_steps_result`, `test_the_strategist_is_given_both_agents_reports`.
TC-130-02	The local runner, given a made-up application, saves one run record with a run ID, every step's result, the original and effective recommendation and a link to every logged call.	1. Run the committee with fakes and read the record. 2. Run the local runner with a rates file.	One record per run with a new run ID, every step, both recommendations and one call ID per logged call.	Pass. `test_committee.py`: `test_a_run_saves_one_record_with_a_unique_run_id_and_the_fields_from_the_ticket`, `test_the_record_lists_a_call_id_for_every_logged_attempt`. `test_committee_rates.py`: `test_the_local_runner_takes_its_rates_from_a_cache_file_and_never_asks_the_ecb`. No live run (Note 1).
TC-130-03	If a required step still fails after its retries, the run is saved as failed with the step and reason and no recommendation. A re-run gets a new run ID linked to the failed one.	1. Make a fake provider keep failing. 2. Re-run the failed record.	The run is saved as failed with the step and reason and no recommendation. The re-run has a new run ID that points back to the failed run.	Pass. `test_committee.py`: `test_a_step_that_fails_after_its_retries_saves_a_failed_run_with_no_recommendation`. `test_retry_budget.py`: `test_a_provider_error_is_retried_at_most_twice_after_2_then_8_seconds`, `test_a_re_run_has_a_new_run_id_linked_to_the_failed_run_and_leaves_the_failed_record_alone`. Nothing in the app triggers a re-run yet (Note 2).
TC-130-04	When an application moves to Applied the committee starts in the background. The AI run	1. On the emulator, set an application to Applied with the	One run starts. A complete run moves the application to AI Deliberated. A failed	Pass, with the emulator. `test_auto_start.py`: `test_two_claims_at_the_same_moment_have_exactly_one_win`

ID	Acceptance criterion	Steps	Expected result	Result and evidence
	status is stored apart from the application status, and a complete run moves the application to AI Deliberated.	listener running. 2. Finish one run as complete and one as failed.	run leaves it at Applied.	`ner`, `test_a_complete_run_moves_the_application_to_ai_deliberated_with_a_status_history_entry`, `test_a_failed_run_leaves_the_application_applied_with_no_history_entry_and_the_reason_on_the_run`, `test_the_listener_starts_a_run_when_an_application_becomes_applied_and_only_one`. The listener only runs when `AUTO_START_COMMITTEE=true` (Note 3).
TC-130-05	Every LLM call, Serper search and valuation-model call is saved as one record in an `ai_calls` collection that underwriters can read, and brokers only for their own clients.	1. Run a whole committee run with fakes and list the saved documents. 2. Read the Firestore rules for `ai_calls`.	One `ai_calls` document per call, each retry its own document. Underwriters can read all, a broker only where `brokerId` is theirs.	Pass for the saving. `test_call_log.py`: `test_a_complete_run_saves_one_document_for_each_call_and_they_line_up_with_the_run_record`, `test_every_retry_is_its_own_document_and_shows_what_was_sent_the_second_time`, `test_the_valuation_model_call_is_saved_with_its_inputs_and_answer`. `test_call_log_firestore.py`: `test_a_whole_committee_run_leaves_its_calls_where_the_run_can_be_found`. The access rule is in `firestore.rules`. I did not run its test (Note 4).

Test run

From `al-ai` on `main` at `d1d1014`, 13 Nov 2026:

```
uv run pytest -q -p no:cacheprovider tests/test_committee.py tests/test_retry_budget.py tests/test_committee_ids.py tests/test_budget_before_first_call.py tests/test_committee_rates.py tests/test_auto_start.py tests/test_auto_start_wiring.py tests/test_call_log.py tests/test_call_log_firestore.py
```

Result without the emulator: 83 passed, 67 skipped. The skips are the tests in `test_auto_start.py` and `test_call_log_firestore.py` that need Firestore.

Result with the Firestore emulator running (`firebase emulators:exec --only firestore --project demo-al --config firebase.json`, run from `al-core`), on `test_auto_start.py`, `test_auto_start_wiring.py` and `test_call_log_firestore.py`: 72 passed, 0 skipped.

No run called a real model, Serper or the ECB.

Notes

1. I made no live run, because it calls Gemini, Groq, Ollama and Serper. The live evidence is the two run records from 4 Nov 2026 in `al-ai/docs/committee-evidence/` (mortgage: Approve to Approve, HELOC: Approve

to Conditionally Approve). The runner test swaps `run_committee` for a fake, so it checks the runner's setup and not a whole run.

2. `rerun()` works in the tests, but nothing in the app calls it, because we haven't decided what triggers a re-run. The local runner can re-run with `--rerun <failed run id>`. The criterion only says a re-run gets a new linked ID, so it is met as worded.
3. The listener is off by default. It starts only when the service runs with `AUTO_START_COMMITTEE=true`.
4. The access rule for `ai_calls` is tested in `al-core/test/rules.test.js` (Dumi's work). I read the rule but did not run that test for this document. The `ai_calls` collection comes from Dumi's PR #177, merged on 10 Nov, after the first version of this test case.