
EPS REV B CONTROLLER — DEVELOPMENT STUDY

Essential +3V3 is an external input; source/interlock, charger and pack manager not integrated.

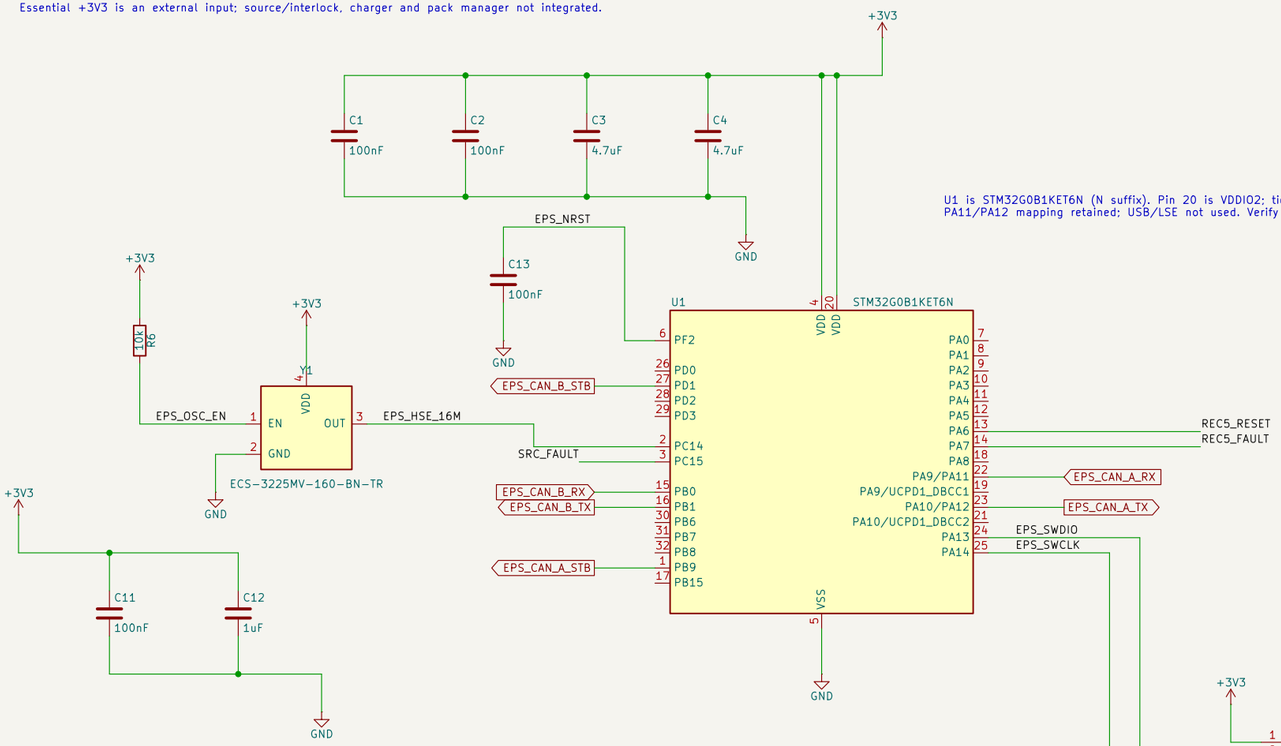


16 MHz HSE bypass. No passive crystal.
Place C11/C12 locally at Y1 in layout; source-series option remains open.

U1 is STM32G0B1KET6N (N suffix). Pin 20 is VDDIO2; tied to VDD.
PA11/PA12 mapping retained; USB/LSE not used. Verify UCPD reset configuration.

CAN A and B interfaces

File: can_interfaces.kicad_sch

PROTECTION INTERFACES — NOT YET INTEGRATED
PA6: REC5_RESET -> existing 47k Q107 base path.
PA7: REC5_FAULT, PC15: SRC_FAULT (active low).
Existing 47k pullups reside on protection sheets.
2 ms reset pulse, >=10 s cooldown, rail qualification.
Reset is not permission to bypass protection.

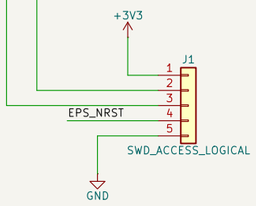

J1 is logical SWD access only, not a physical connector.
1 VTref (sense only), 2 SWDIO, 3 SWCLK, 4 NRST, 5 GND.
No injected probe power; power-off/backfeed review open.


OPEN: ADC conditioning, local charger I2C, isolated pack SMBus/BTP,
UART, interlock status and payload request. Required pins remain unconnected.
No EPS drive on IHU-owned COMMS_EN / PAYLOAD_EN or stack alert.


PD3 reserved: do not connect BMS BTP directly to 3.3 V logic.
BTP high-level guarantee is insufficient; poll status through isolated SMBus.

POLICY LIMIT: component rating fields are saved but required visible Arial
field placement is unsupported by this Konnect API (S11 remains open).

Sheet: /	
File: controller_rev_b.kicad_sch	
Title:	
Size: B	Date:
KiCad E.D.A. 10.0.0	**Rev:** Id: 2/2

CAN A / CAN B — DEVELOPMENT INTERFACES

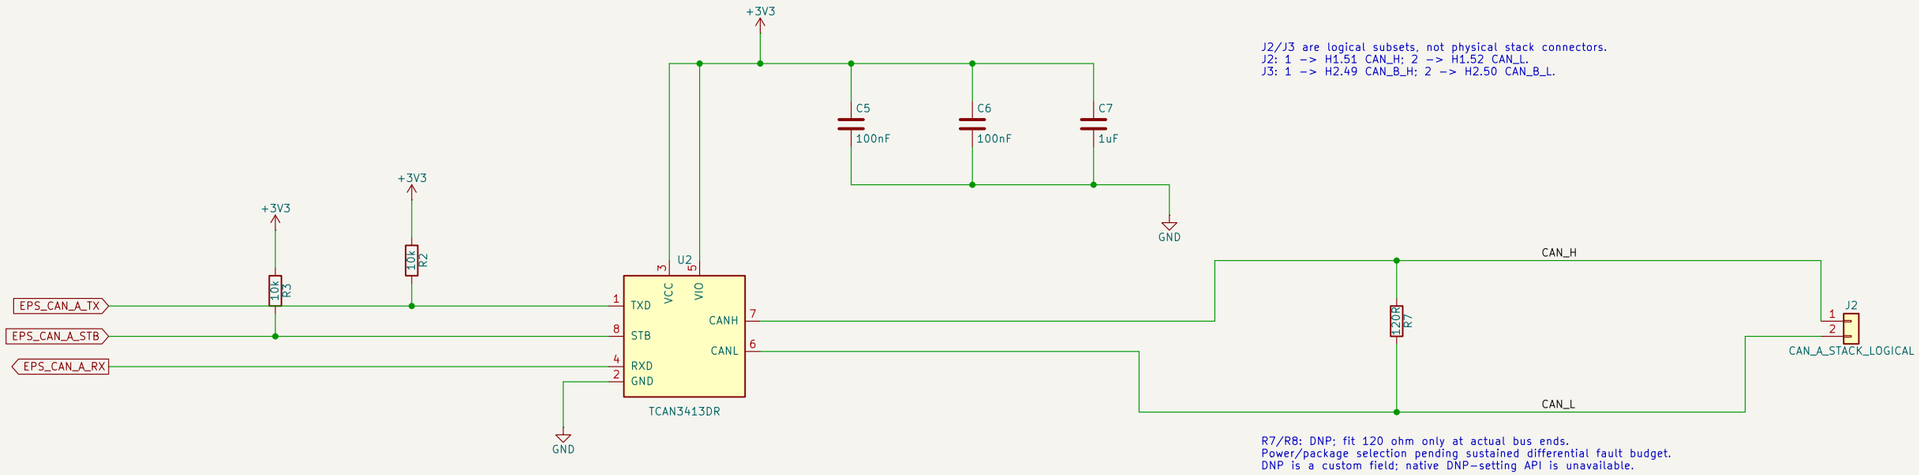

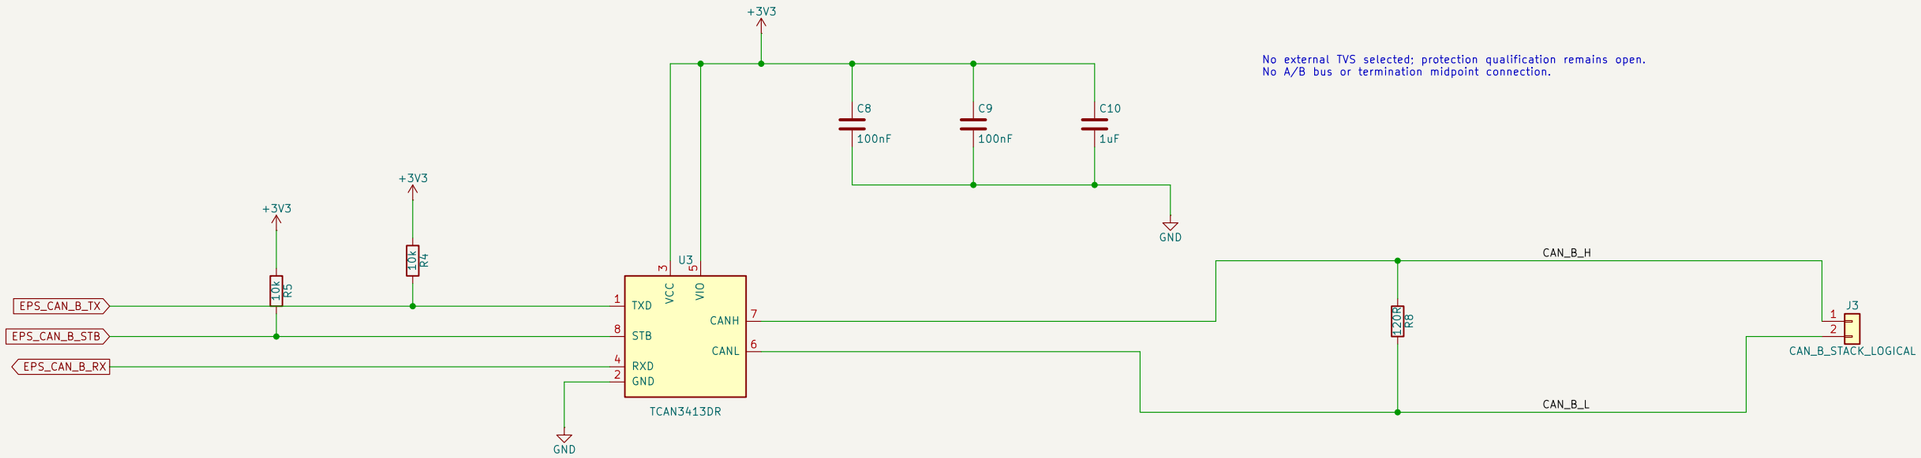

FAULT LIMIT: shared +3V3, GND, MCU and clock remain common paths.
Per-transceiver VCC/VIO + pullup branch limiting/isolation is unselected.
CAN B is bus-path recovery, not independent controller/power redundancy.

Existing custom U2/U3 symbols and manufacturer land patterns reused.
Pin maps verified; assembly, ESD, timing and physical placement not qualified.

Sheet: /CAN A and B interfaces/		
File: can_interfaces.kicad_sch		
Title:		
Size: B	Date:	**Rev:**
KiCad E.D.A. 10.0.0		Id: 2/2