

JavaScript 1

CS571: Building User Interfaces

Cole Nelson

JavaScript

This is not a comprehensive introduction to JS, so these are great additional resources:

- [MDN Web Docs](#)
- [W3 Schools](#)

Periodically, we will also use [StackBlitz](#) or [CodePen](#) for code snippets.

Learning Objectives

1. Obtain a broad understanding of web programming.
2. Understand the essentials of JavaScript.
3. Be able to use JavaScript in web programming.
4. Know of other popular tools.

History

- Developed by Netscape Communications (Brendan Eich) in 1995.
 - It was designed in 10 days.
- A "glue language" for HTML.
- Mocha > LiveScript > JavaScript.
- Specifications are ECMAScript (e.g. "ES").

A Classic Frontend

A cake with 3 attributes.

| Aspect | Behavior | Cake |
|--------|-----------|--------|
| HTML | Structure | Sponge |
| CSS | Design | Icing |
| JS | Behavior | Clown |




Badger Bakery: HTML + CSS

JavaScript Essentials

Try It!

Browser > F12 > Console

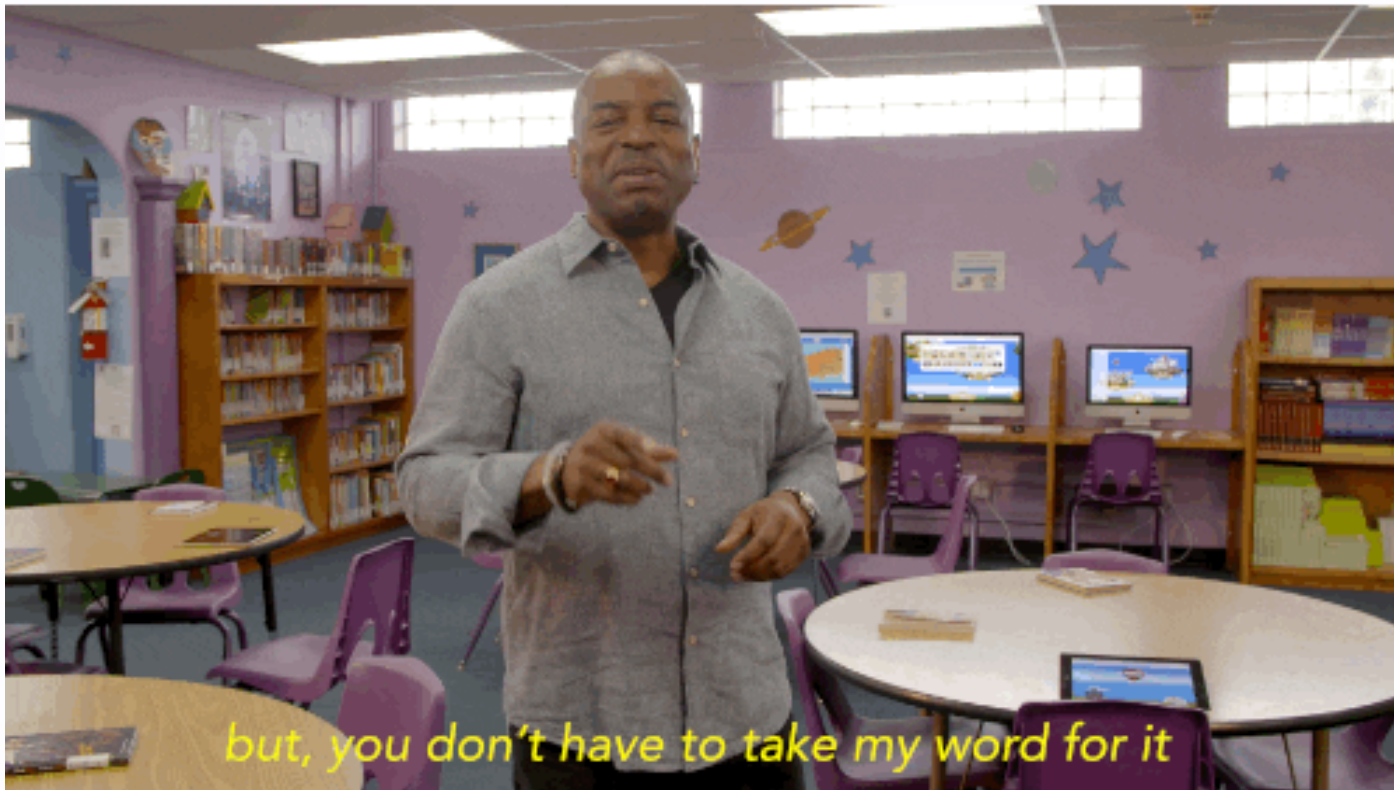

Variables

JS is a dynamic, loosely-typed language. The data type is inferred from the declaration and can be changed.

Variables are *containers* that hold data.

There are 7 standard data types: numbers, string, boolean, null, undefined, symbol, object. The first 6 are considered *primitive* and are stored on the *stack*.

Object is considered *complex* and stored on the *heap*.

Variable Declarations

Variables can be declared with `var` , `let` , or `const` .

| Keyword | Scope | Re-assignable? | Preferred? |
|---------|----------|----------------|------------|
| var | function | yes | no |
| let | block | yes | yes |
| const | block | no | yes |

`let` and `const` were introduced in ES6. They are the preferred ways of declaring a variable.

Variable Examples

Consider the following block of code...

```
let age = 27;  
const name = "Ashley";  
var hasCar = false;
```

Can we perform `age = 28` ? Yes! We use `let` .

Can we perform `name = "Carl"` ? No! We use `const` .

Is `hasCar` declared correctly? Yes, but we should use `let` instead of `var` .

Variable Examples

Is this block of code correct?

```
let name = "Ahmed";  
console.log("My name is " + name);  
name = 27;  
console.log("My age is " + name);  
name += 1;  
console.log("My age a year later is " + name);
```

It's not *good* code, but it is *correct* code! Variables can change types during runtime.

Determining Data Types

We can query the data type at runtime using `typeof`.

```
let foo = "Charles";  
console.log(typeof foo);  
foo = 1932;  
console.log(typeof foo);  
foo = true;  
console.log(typeof foo);
```

```
string  
number  
boolean
```

Conditionals

Conditionals allow the code to make decisions and carry out different actions.

Three types:

1. `if`, `else if`, and `else` statements
2. `switch` statements
3. ternary operators `evalExpr ? trueExpr : falseExpr`

Conditionals

Any value that is not `false`, `undefined`, `null`, `0`, `NaN`, or `""` returns `true`. Why is this useful?

```
var currentMember = "Alice";
let textContent = "?";
if (currentMember) {
  textContent = "View Profile";
} else {
  textContent = "Sign Up";
}
console.log(textContent)
```

`'View Profile'`

Comparison and Logical Operators

| Operator | Meaning |
|-------------|-------------------------------|
| === and !== | strong comparison |
| = and != | weak comparison |
| < and > | less/greater than |
| <= and >= | less/greater than or equal to |
| && | and |
| | or |

Objects

Objects are unordered collections of data defined using key-value pairs.

```
let teachingAssistant = {  
  firstName: "Alice",  
  lastName: "Smith",  
  age: 24  
};  
console.log(teachingAssistant);
```

```
{firstName: 'Alice', lastName: 'Smith', age: 24}
```

Object Properties

There are two different notations to access object properties.

```
console.log(teachingAssistant.lastName);  
console.log(teachingAssistant["firstName"]);
```

```
'Smith'  
'Alice'
```

Arrays

An array is a variable that contains multiple elements.

```
let fruits = ["apple", "banana", "coconut"];  
fruits[0] = "apricot";  
console.log(fruits);  
fruits.push(17);  
console.log(fruits);
```

```
['apricot', 'banana', 'coconut']  
['apricot', 'banana', 'coconut', 17]
```

Notice! They don't have to be the same type.

Looping

For Loops

```
for (let i = 0; i < 10; i++) {} // typical for loop
for (let attr in course) {}    // loop through object properties
for (let item of arr) {}       // loop through array contents
```

While Loops

```
while(cond) {} // typical while loop
do {} while(cond); // guarantees at least one execution
```

You can use **break** (exit) and **continue** (skip).

Functions

A procedure that includes a set of statements that performs a task or calculates a value.

```
function fToC(temp) {  
    return (temp - 32) * 5/9;  
}  
fToC(77)
```

25

Other Ways to Declare Functions

Function Expression

```
const fToC = function(temp) {  
  return (temp - 32) * 5/9;  
}
```


Arrow Function

```
const fToC = (temp) => {  
  return (temp - 32) * 5/9;  
}
```

JavaScript and the Web

Including JavaScript in Your Webpage

- Inline JS
- Internal JS
- External JS

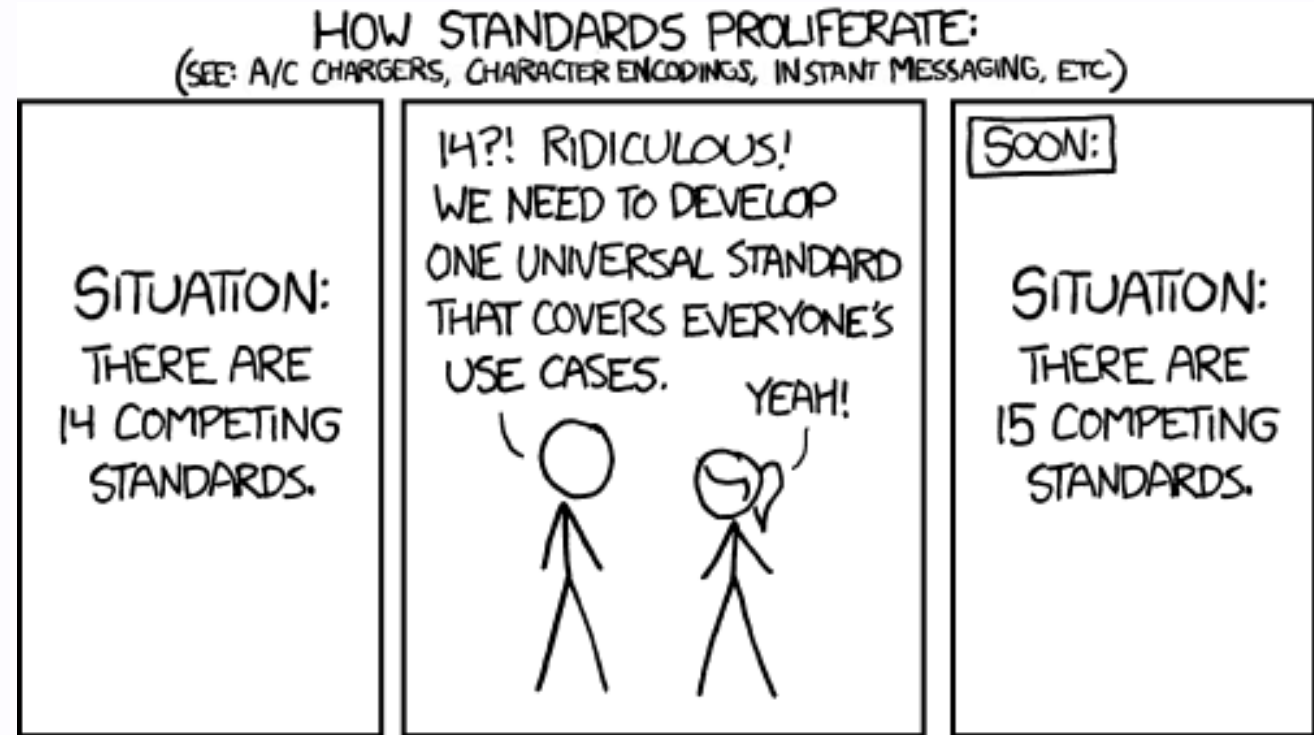

XKCD 927: Standards

External JavaScript

The JavaScript is included from outside of the HTML.

index.html

```
<html>  
  <h1>Welcome to my webpage!</h1>  
  <script src='app.js'></script>  
</html>
```

app.js

```
console.log("hello world!");
```

Internal JavaScript

The JavaScript is included inside of the HTML.

index.html

```
<html>
  <h1>Welcome to my webpage!</h1>
  <script>
    console.log("hello world!");
  </script>
</html>
```

Inline JavaScript

The JavaScript is included inside of the HTML element.

index.html


```
<html>  
  <h1>Welcome to my webpage!</h1>  
  <button onclick="console.log('hello world!')">Click Me!</button>  
</html>
```

Document Object Model (DOM)

HTML is just a tree, where each tag (e.g. object on the page) is a node!

We use JavaScript to manipulate this tree.

Document Object Model

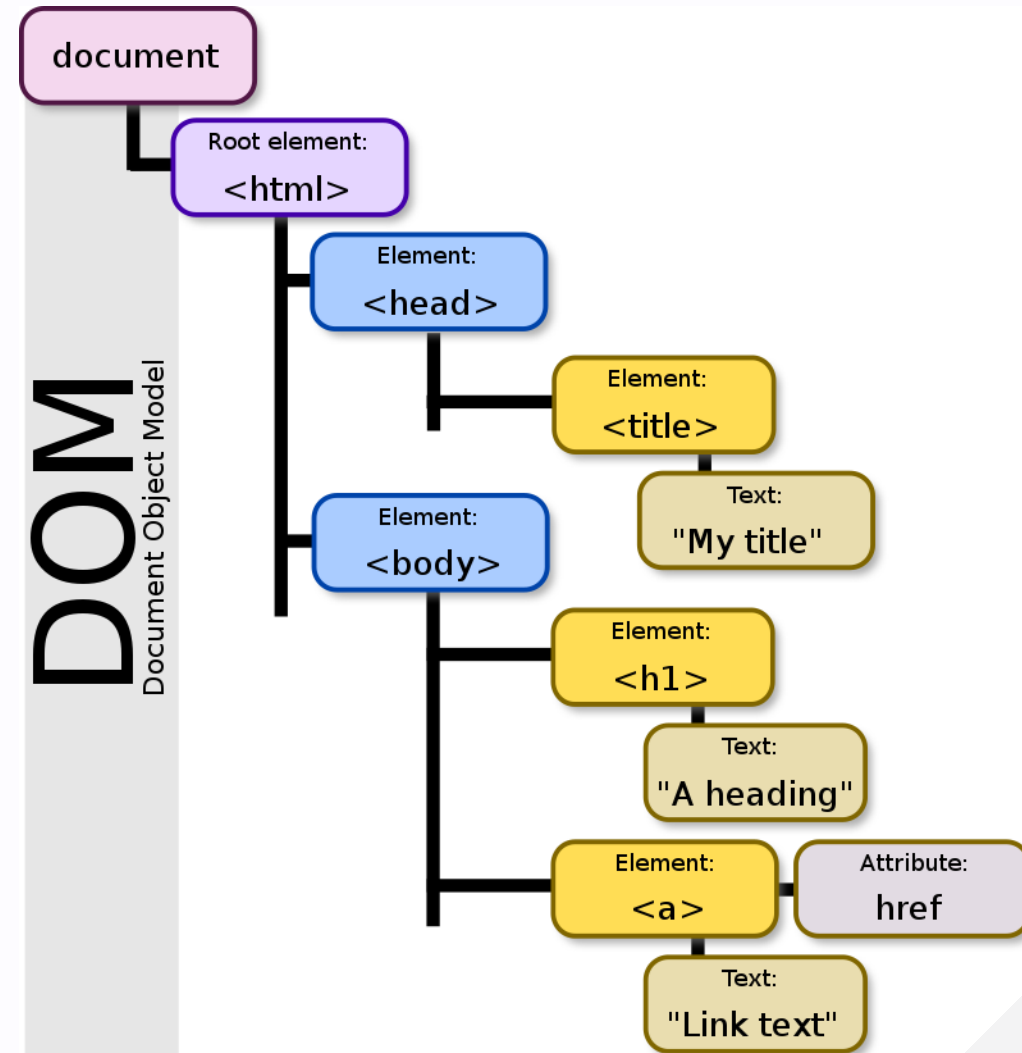

Manipulating the DOM

Use `document` to reference the DOM.

```
let title = document.getElementById("articleTitle");  
let loginBtn = document.getElementsByName("login")[0];  
let callouts = document.getElementsByClassName("callout"); // *
```

*class refers to a **CSS** class

We can add *event listeners* or read/modify *properties*.

Manipulating the DOM

Using the DOM elements from the previous slide, we..

- Change the title of the article.
- Add an action for when the button is clicked.
- Make all of the callouts red.

```
title.textContent = 'My Website!';
loginBtn.addEventListener("click", () => {
  console.log("You are advancing to the next part of the site...");
})
for (let callout in callouts) {
  callout.style.color = "red";
}
```

Badger Bakery - JS

Other Tools

What is this "TypeScript" I hear about?

TypeScript (TS) is a strict syntactical superset of JS developed to enable the development of large-scale applications and to add static typing.

A preprocessor is used to transpile TS to JS.

Safety of Java + Flexibility of JS = TS

We do not cover TS in this course.

What is this "jQuery" I hear about?

A fast, small, and feature-rich JavaScript library.

Contains all of the functions that you wish were in the standard JavaScript library.

- **jQuery:** `$("#login")`
- **DOM:** `document.getElementById('login')`

Keep your jQuery up-to-date!

We do not cover jQuery in this course.

What is this "Bootstrap" I hear about?

A CSS Framework for developing responsive and mobile-first websites.

We will cover this next time :)

On to Design Thinking! 🚀