

Building User Interfaces

Usability Evaluation:

Rapid Methods

Professor Bilge Mutlu

What we will learn today?

- What is usability evaluation?
- What are rapid/expert methods?
 - Heuristic evaluation
 - Cognitive walkthrough
- React 2 β preview

What is usability evaluation?

Usability Evaluation

Definition: The assessment of the effectiveness of and user satisfaction with design solutions.

Types of Usability Evaluation

1. Testing-based methods
2. Expert-review-based methods

Testing-based methods

Definition: Empirical, *i.e.*, based on data, testing with users who represent the target population of design solutions.

We will cover testing-based methods later in the semester.

Expert-review-based methods

Definition: Also called *usability inspection*, review-based evaluation by experts who follow well-established protocols to inspect the usability of design solutions.

Our focus today will be on expert-review-based methods.

Which methods?

Heuristic evaluation, heuristic estimation, **cognitive walkthrough**, pluralistic walkthrough, feature inspection, consistency inspection, standards inspection, formal usability inspection.

We will cover the most commonly use two methods.

Heuristic Evaluation

Heuristic Evaluation

Definition: Developed by Jacob Nielsen, heuristic evaluation involves having a small set of evaluators examine the interface and judge its compliance with recognized usability principles (the "heuristics").¹ ²

¹ NN/g: [How to conduct a heuristic evaluation](#)

² NN/g: [Video explanations of the 10 heuristics](#)

NN/g


Heuristic
Evaluation



1: Visibility of system status³ ⁴

The system should always keep users informed about what is going on, through appropriate feedback within reasonable time.

E.g., email clients making a swoosh sound when sending email.

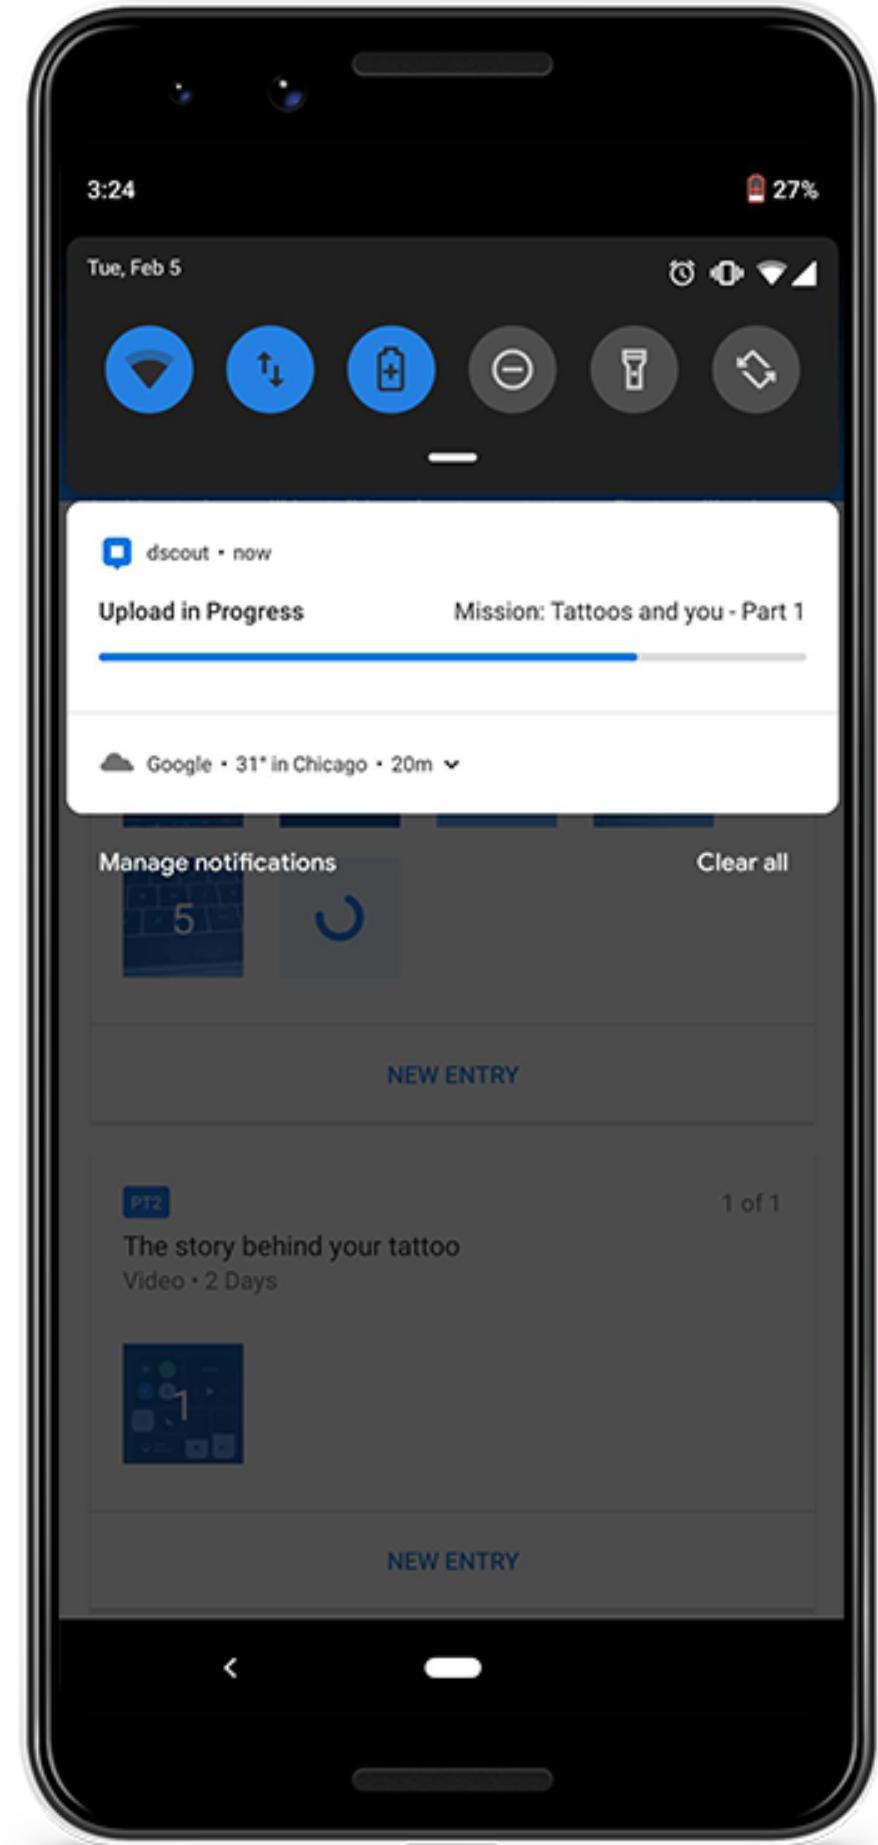


³ NN/g: Visibility of system status

⁴ Image source

2: Match between system and the real world⁵ ⁶

The system should speak the users' language, with words, phrases and concepts familiar to the user, rather than system-oriented terms. Follow real-world conventions, making information appear in a natural and logical order.

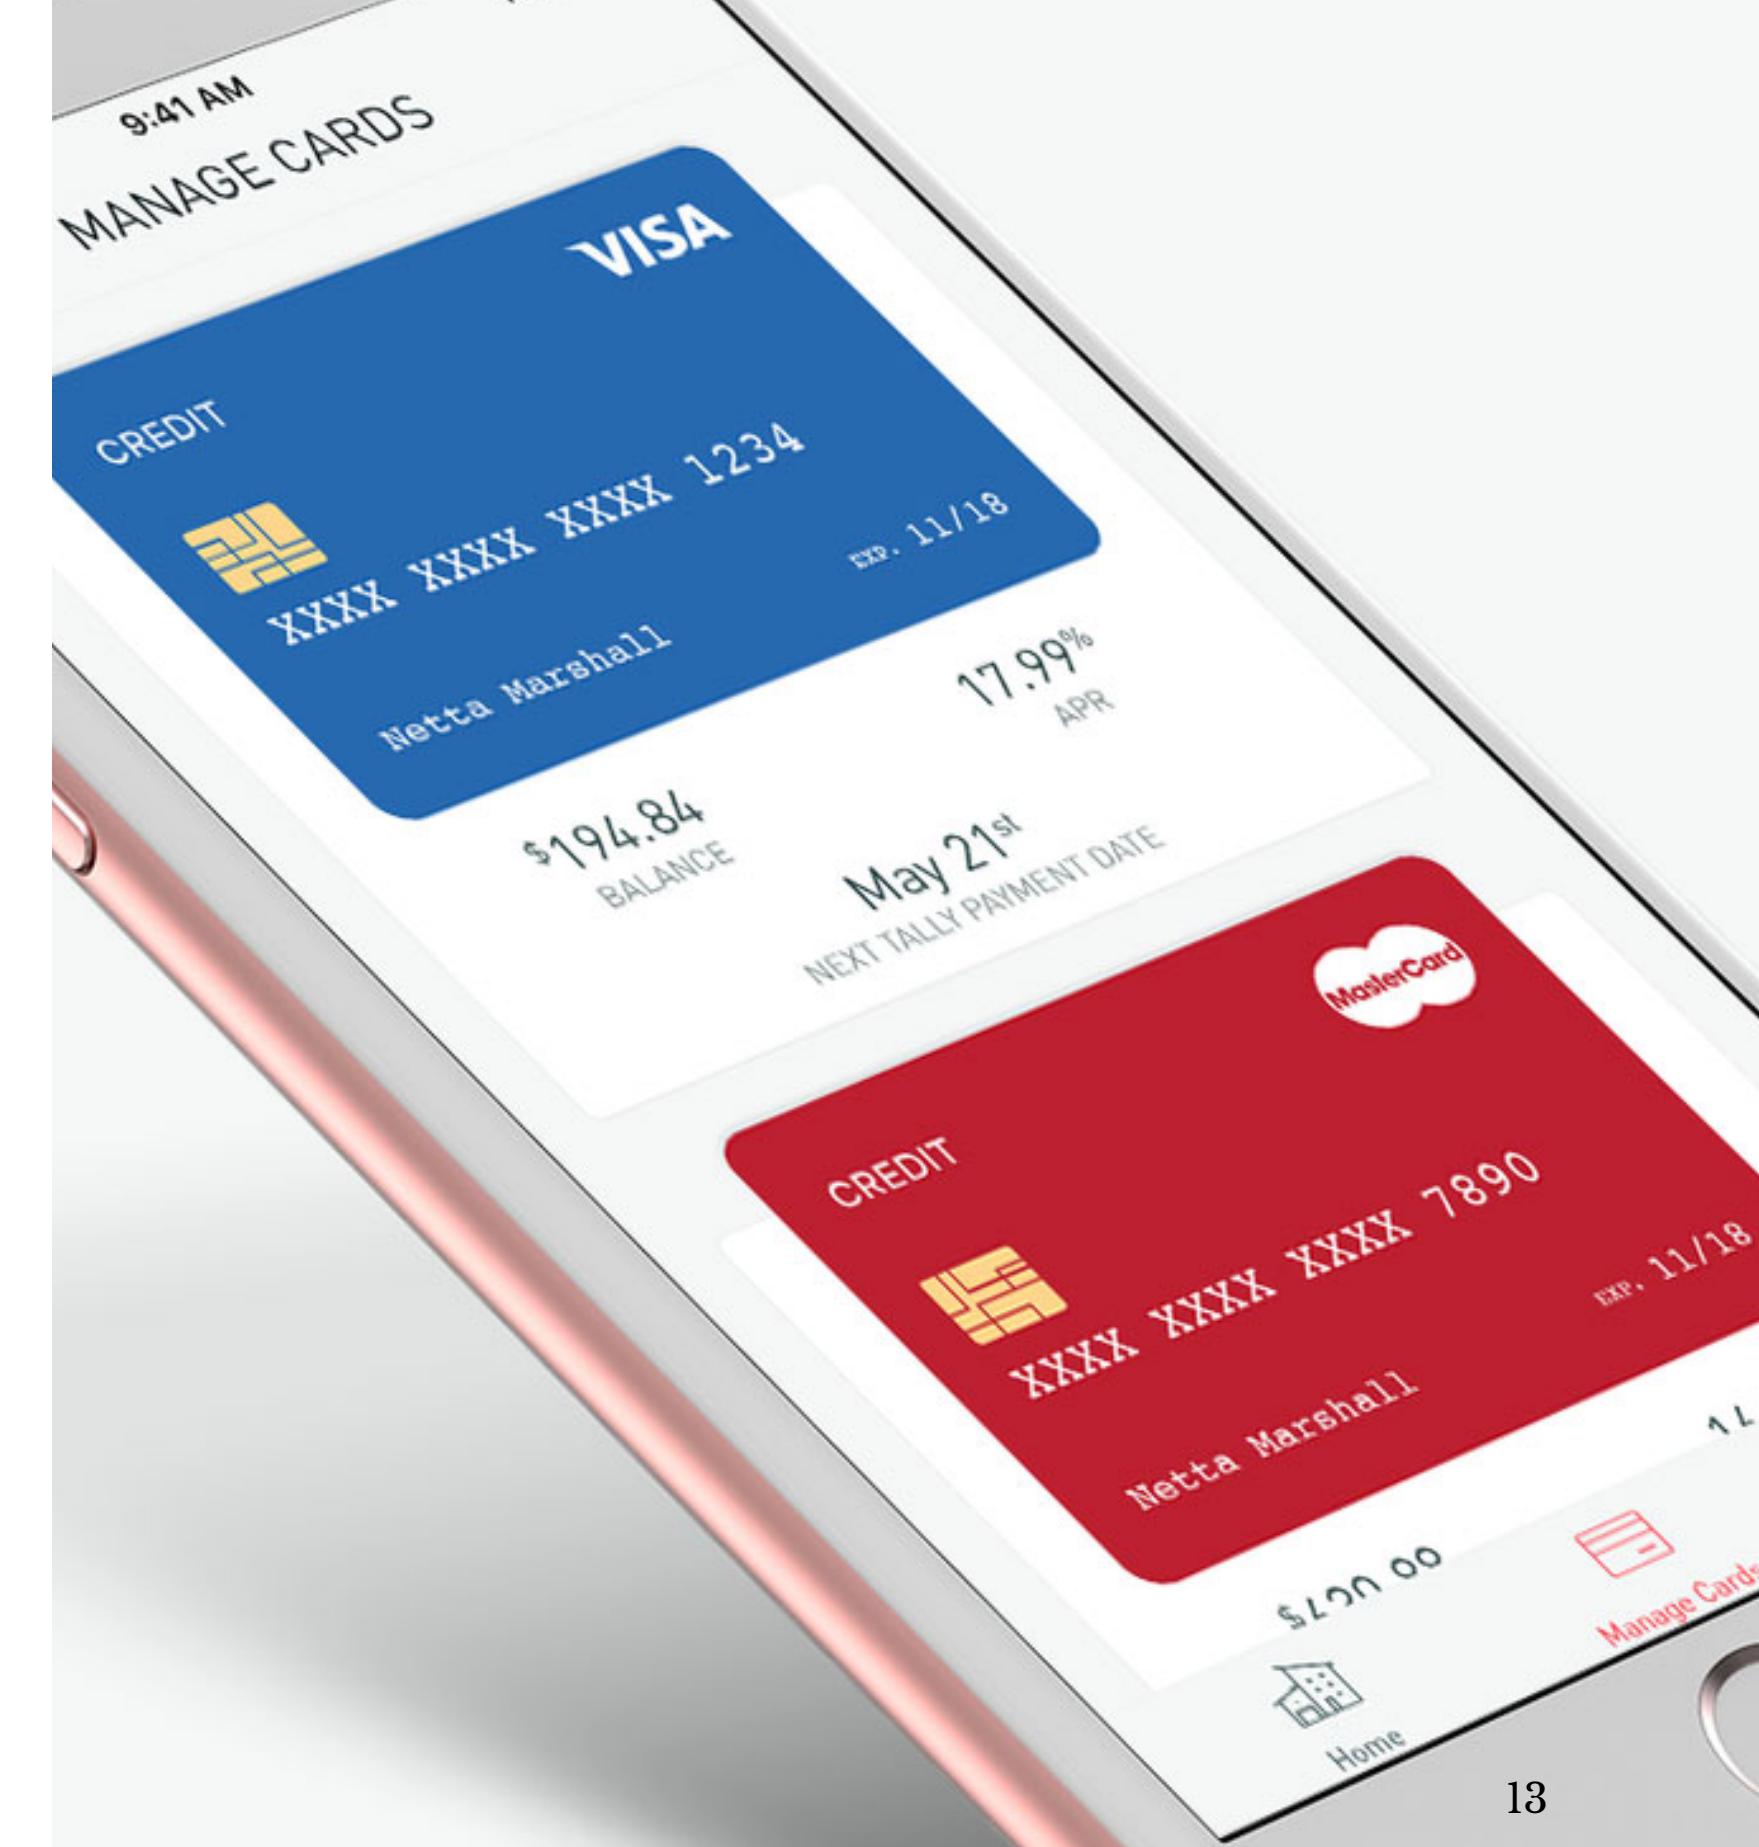

⁵ NN/g: Match between system and the real world

⁶ Image source


3: User control and freedom^{7 8}

Users often choose system functions by mistake and will need a clearly marked "emergency exit" to leave the unwanted state without having to go through an extended dialogue.
Support undo and redo.

E.g., undo for delete/archive in email clients

⁷ NN/g: User control and freedom

⁸ image source

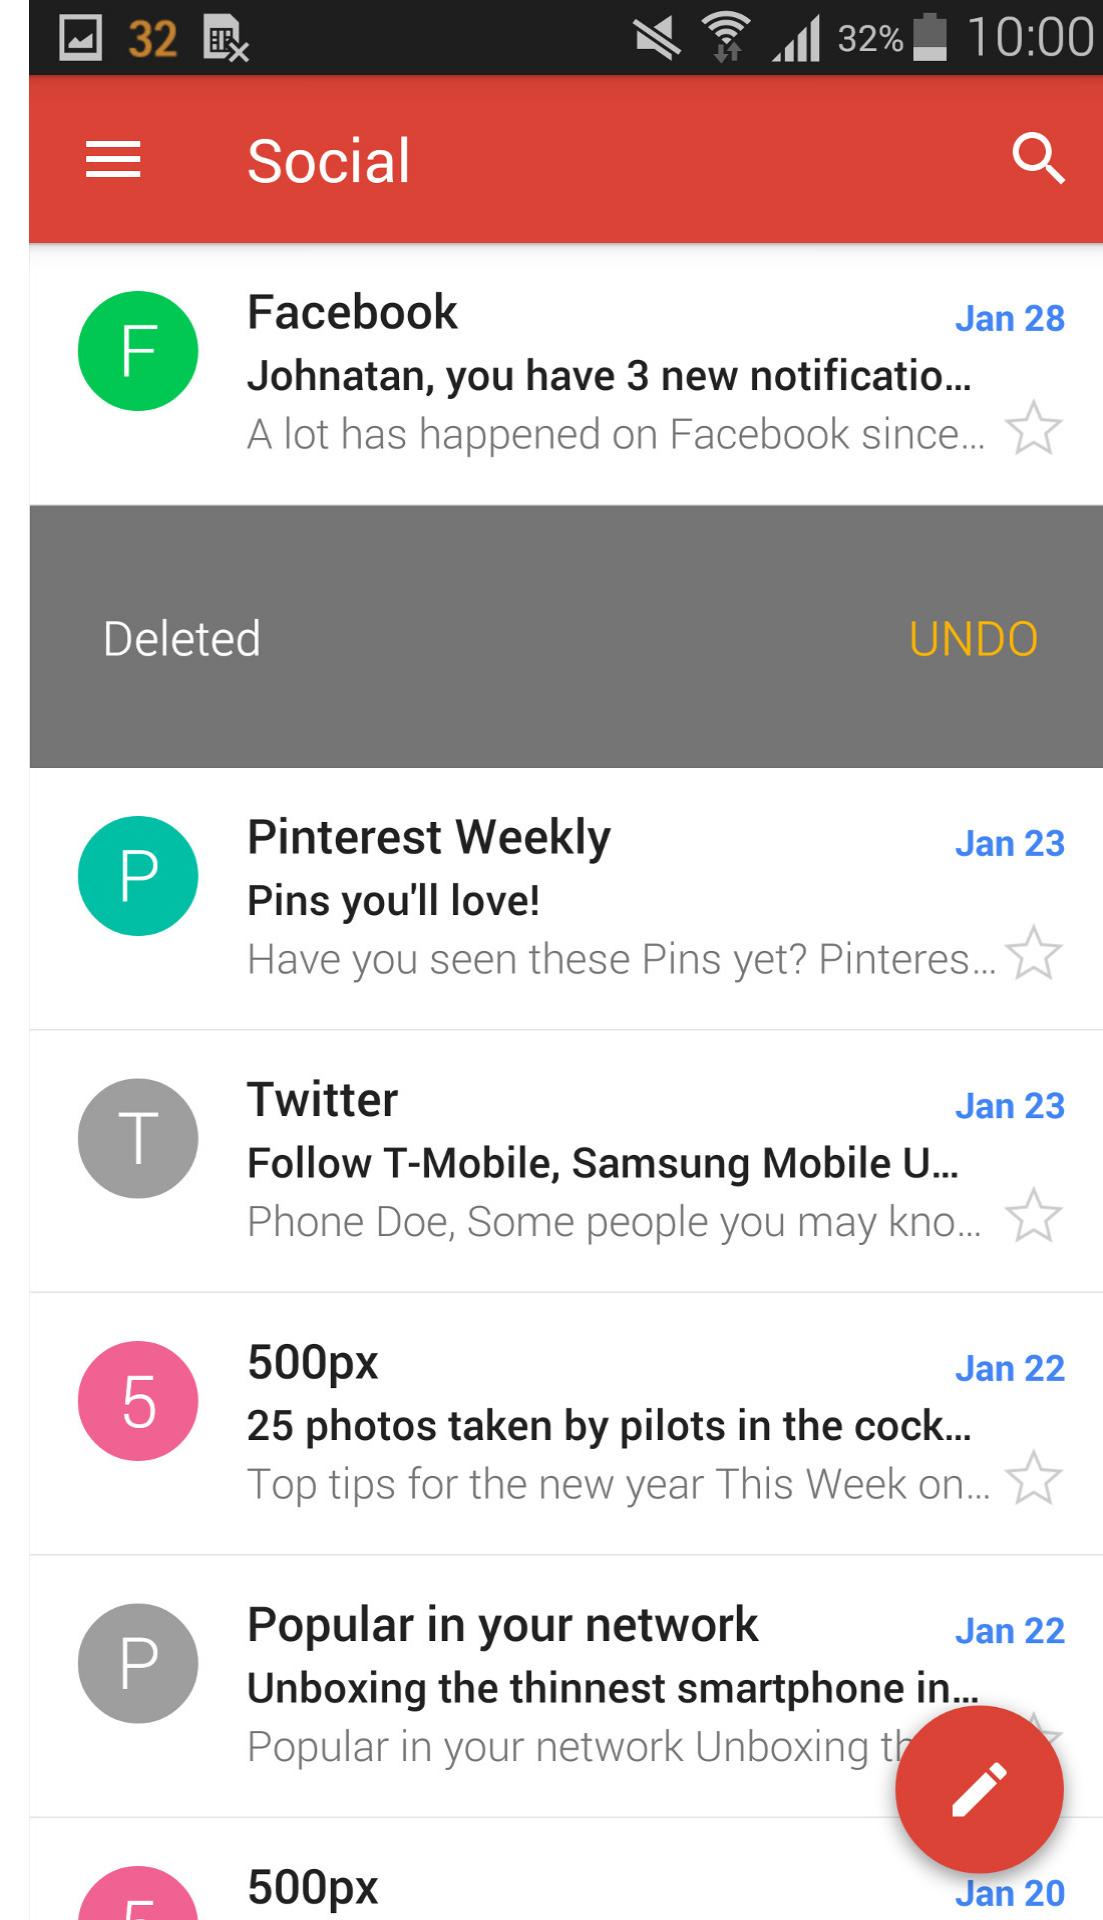

4: Consistency and standards⁹ [^10]

Users should not have to wonder whether different words, situations, or actions mean the same thing. Follow platform conventions.

E.g., component libraries to achieve consistency within an app; platform conventions to achieve consistency across apps.

⁹NN/g: Consistency and standards
[^10]: Image source


The screenshot shows a component library interface with the following sections:

- Filtering:** Includes a range slider from 6.5 to 6.5, a counter set to 158, and a dropdown menu for "Filtering component" with options: Date added, Price descending, Price ascending, Popularity (selected), and Rating.
- CUSTOM COMPONENT:** A section titled "Put the block name" containing a grid of four "Category" components.
- INSTANCE EXAMPLE:** A section titled "Select profiles" showing a grid of social media icons: Facebook, Twitter, Instagram, Slack, and LinkedIn.
- INSTANCES:** A section titled "Filter results" showing a grid of filters: Popular, By popularity, Top rated, Most recent, Comments, Most viral, and a "Create" button.
- Left, Right, Center, Justify:** A vertical list of alignment options with corresponding icons.

Top right corner: 15 components · 6 instances

5: Error prevention¹¹



Even better than good error messages is a careful design which prevents a problem from occurring in the first place. Either eliminate error-prone conditions or check for them and present users with a confirmation option before they commit to the action.

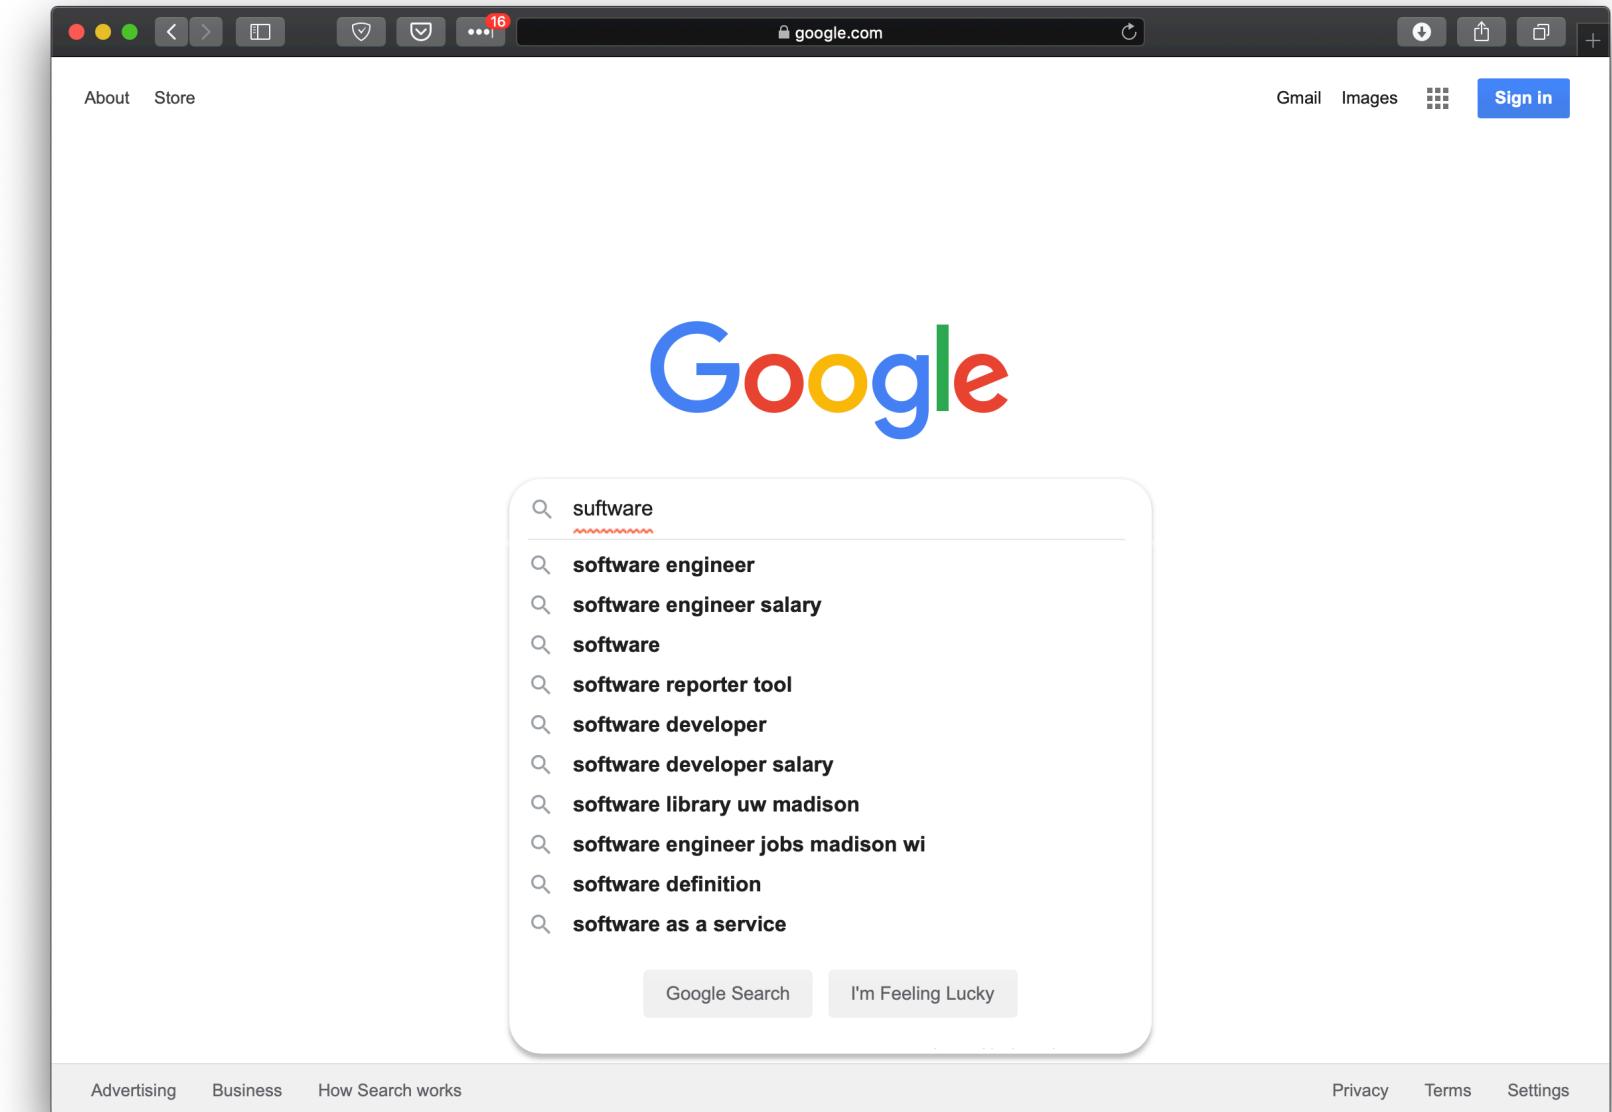

¹¹ NN/g: Error prevention

Examples:¹²

- Autocorrect in search
- Real-time feedback on new user names, password strength, etc.
- Attachment reminders in email clients

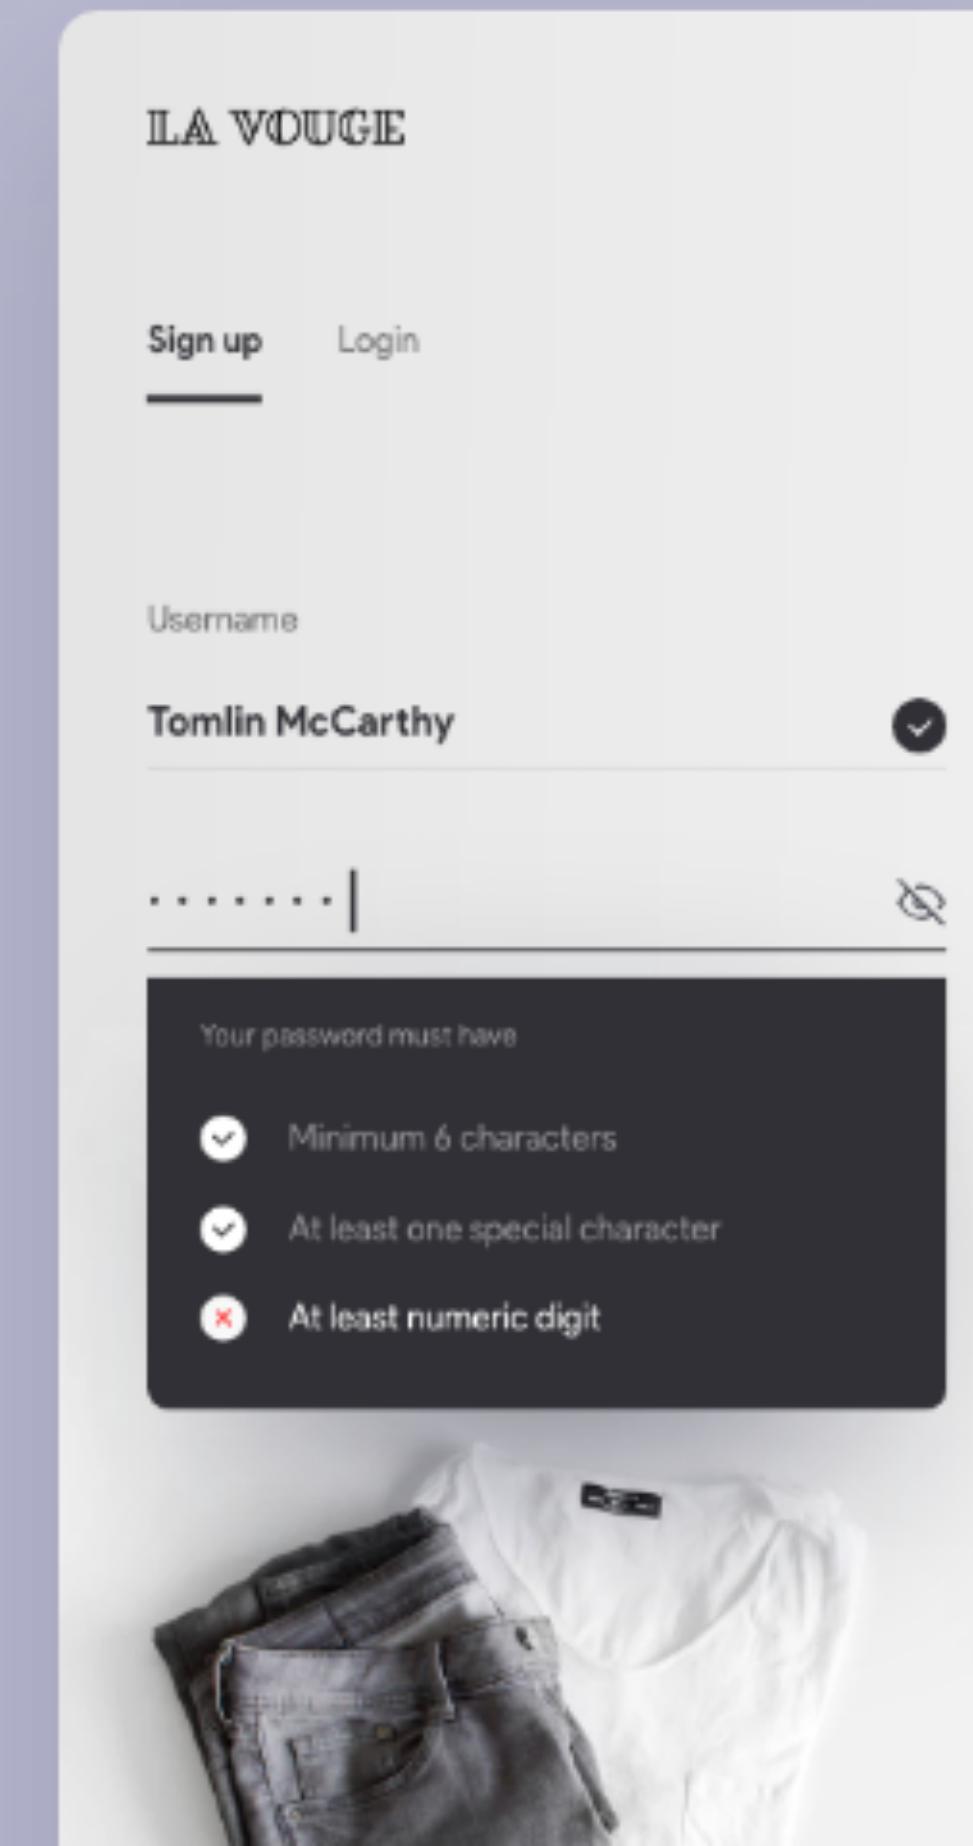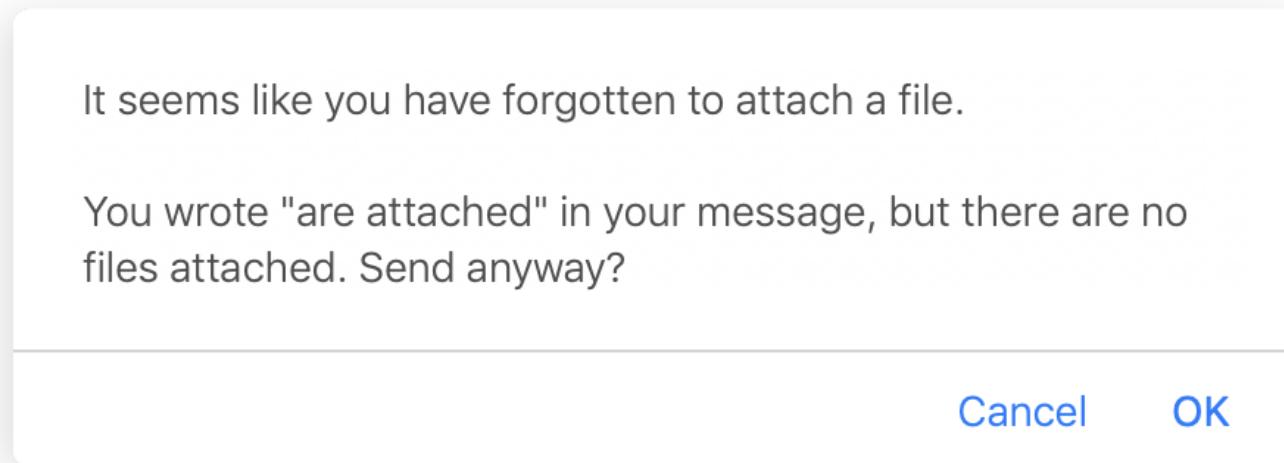


¹² Image source: [Left](#), [Right](#)

6: Recognition rather than recall¹³


Minimize the user's memory load by making objects, actions, and options visible. The user should not have to remember information from one part of the dialogue to another.

Instructions for use of the system should be visible or easily retrievable whenever appropriate.

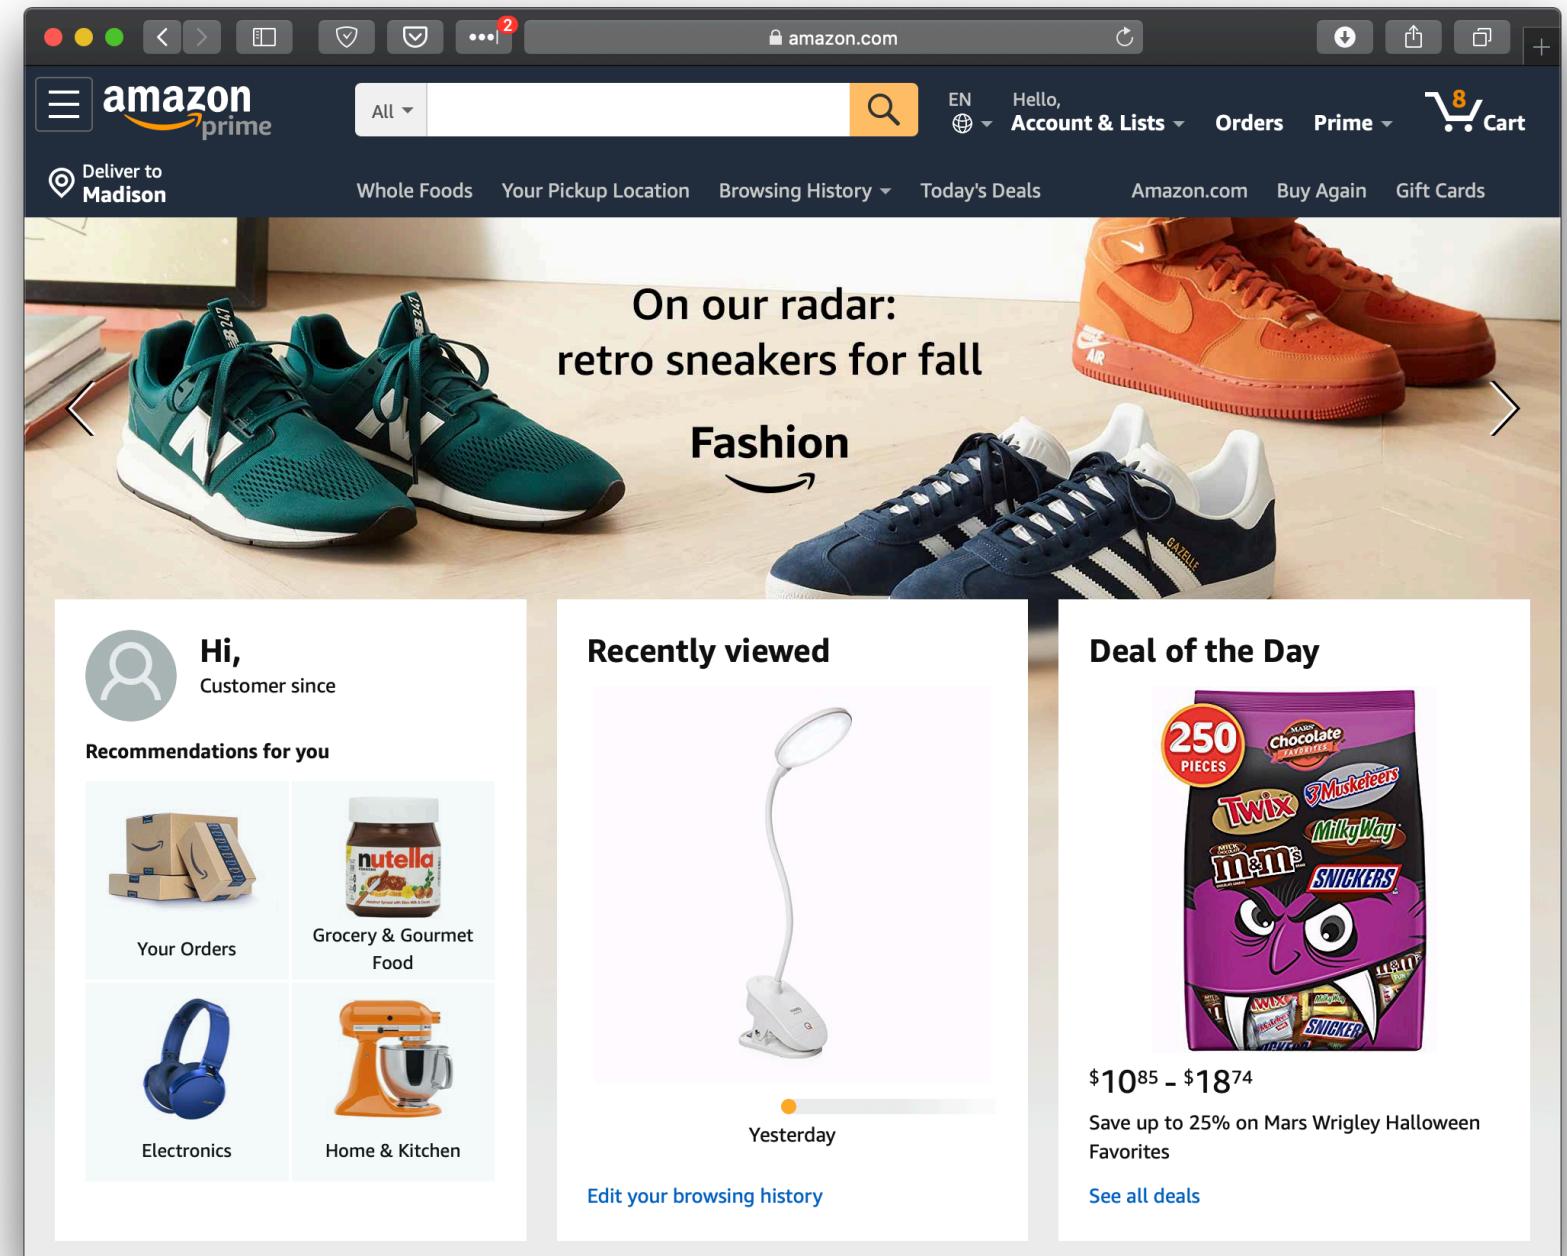

¹³ NN/g: Recognition rather than recall


```
Last login: Tue Nov 28 13:08:25 on ttys001
[5K-Stack:~ bryan$ sudo su
>Password:
sh-3.2# passwd
Changing password for root.
[New password:
[Retype new password:
sh-3.2# exit
exit
5K-Stack:~ bryan$ ]
```

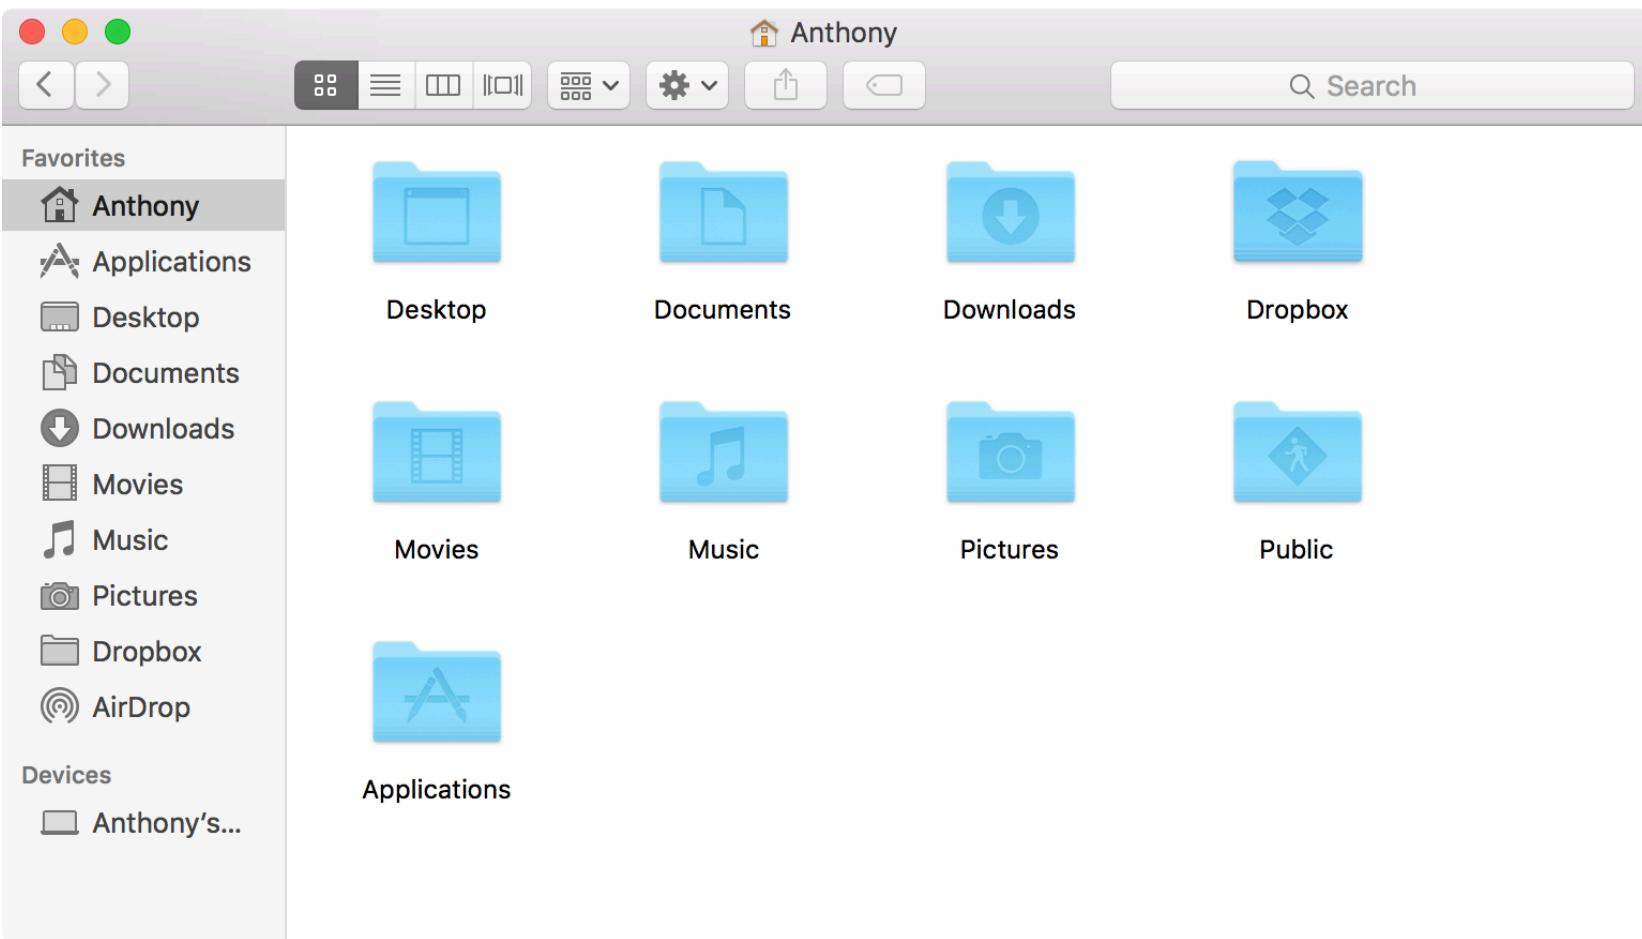

¹⁴ Image source: [Left](#), [Right](#)

7: Flexibility and efficiency of use¹⁵


Accelerators — unseen by the novice user — may often speed up the interaction for the expert user such that the system can cater to both inexperienced and experienced users. Allow users to tailor frequent actions.

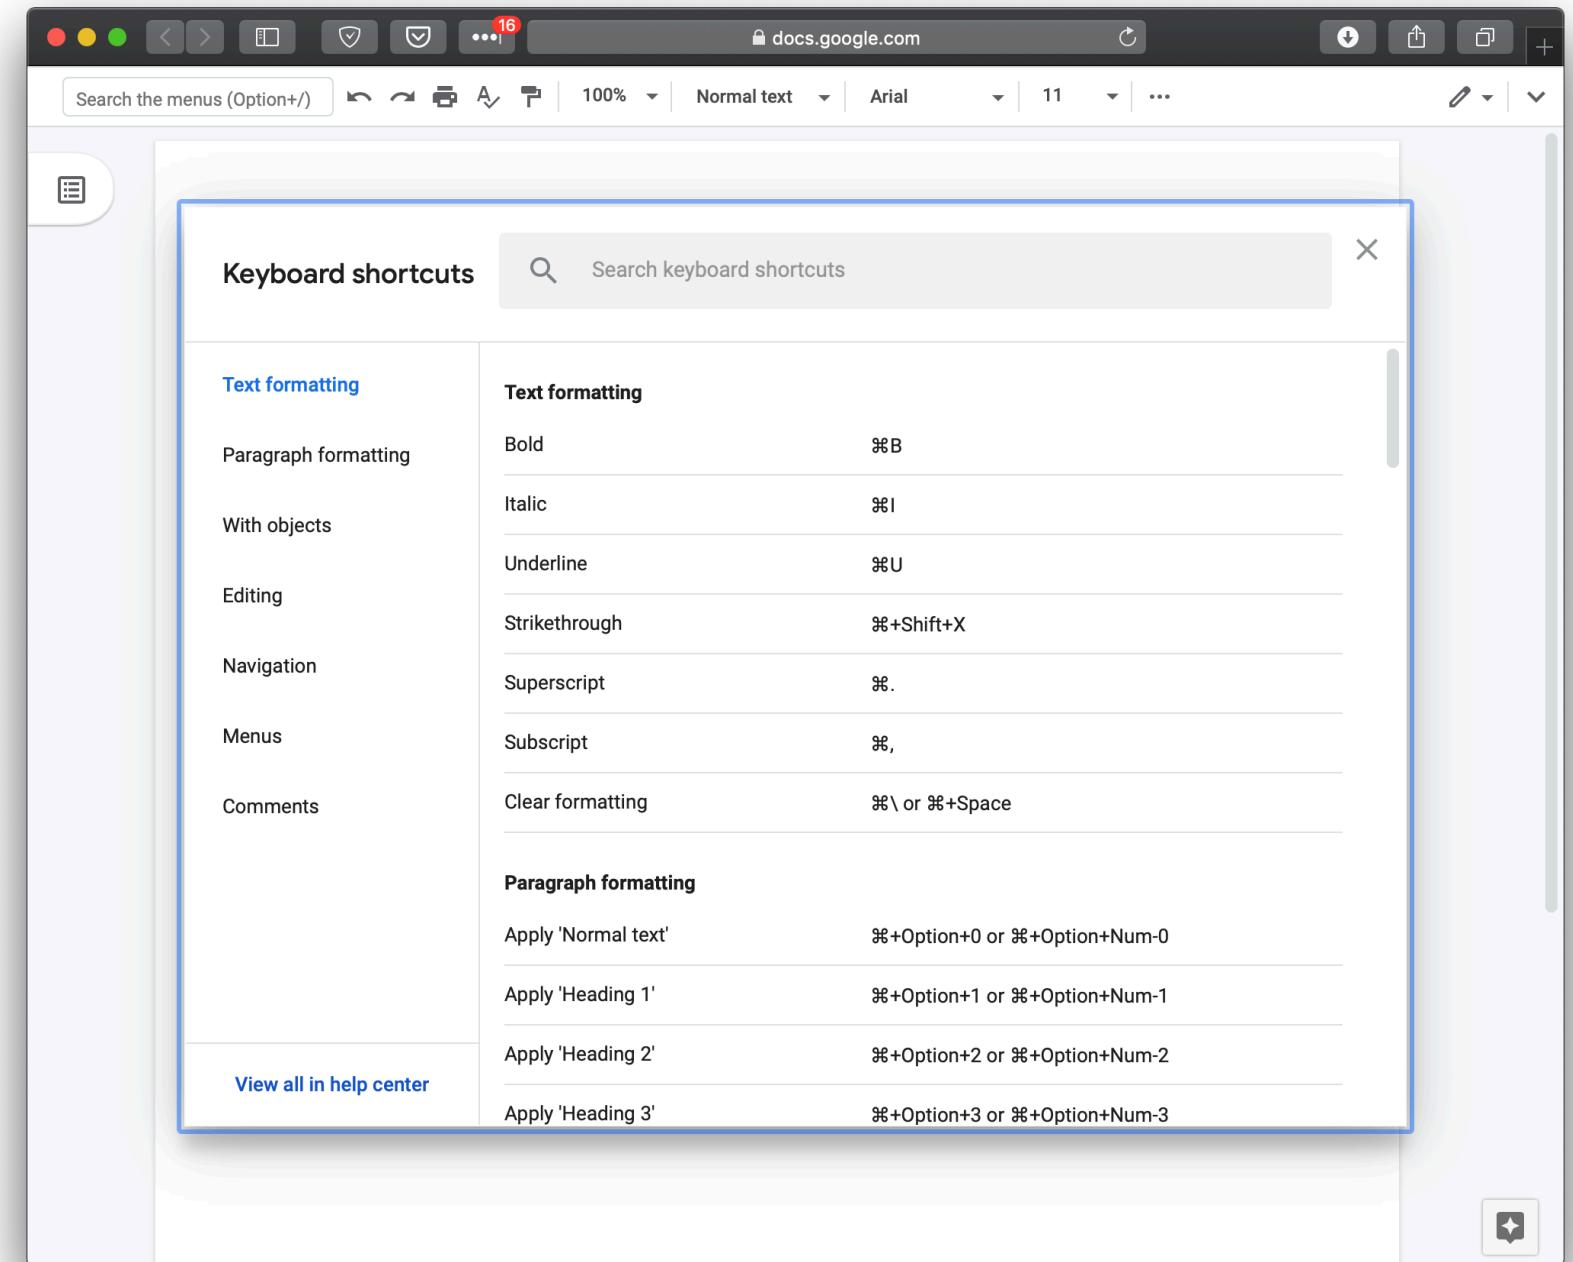

¹⁵ NN/g: Flexibility and efficiency of use

8: Aesthetic and minimalist design¹⁶


Dialogues should not contain information which is irrelevant or rarely needed. Every extra unit of information in a dialogue competes with the relevant units of information and diminishes their relative visibility.

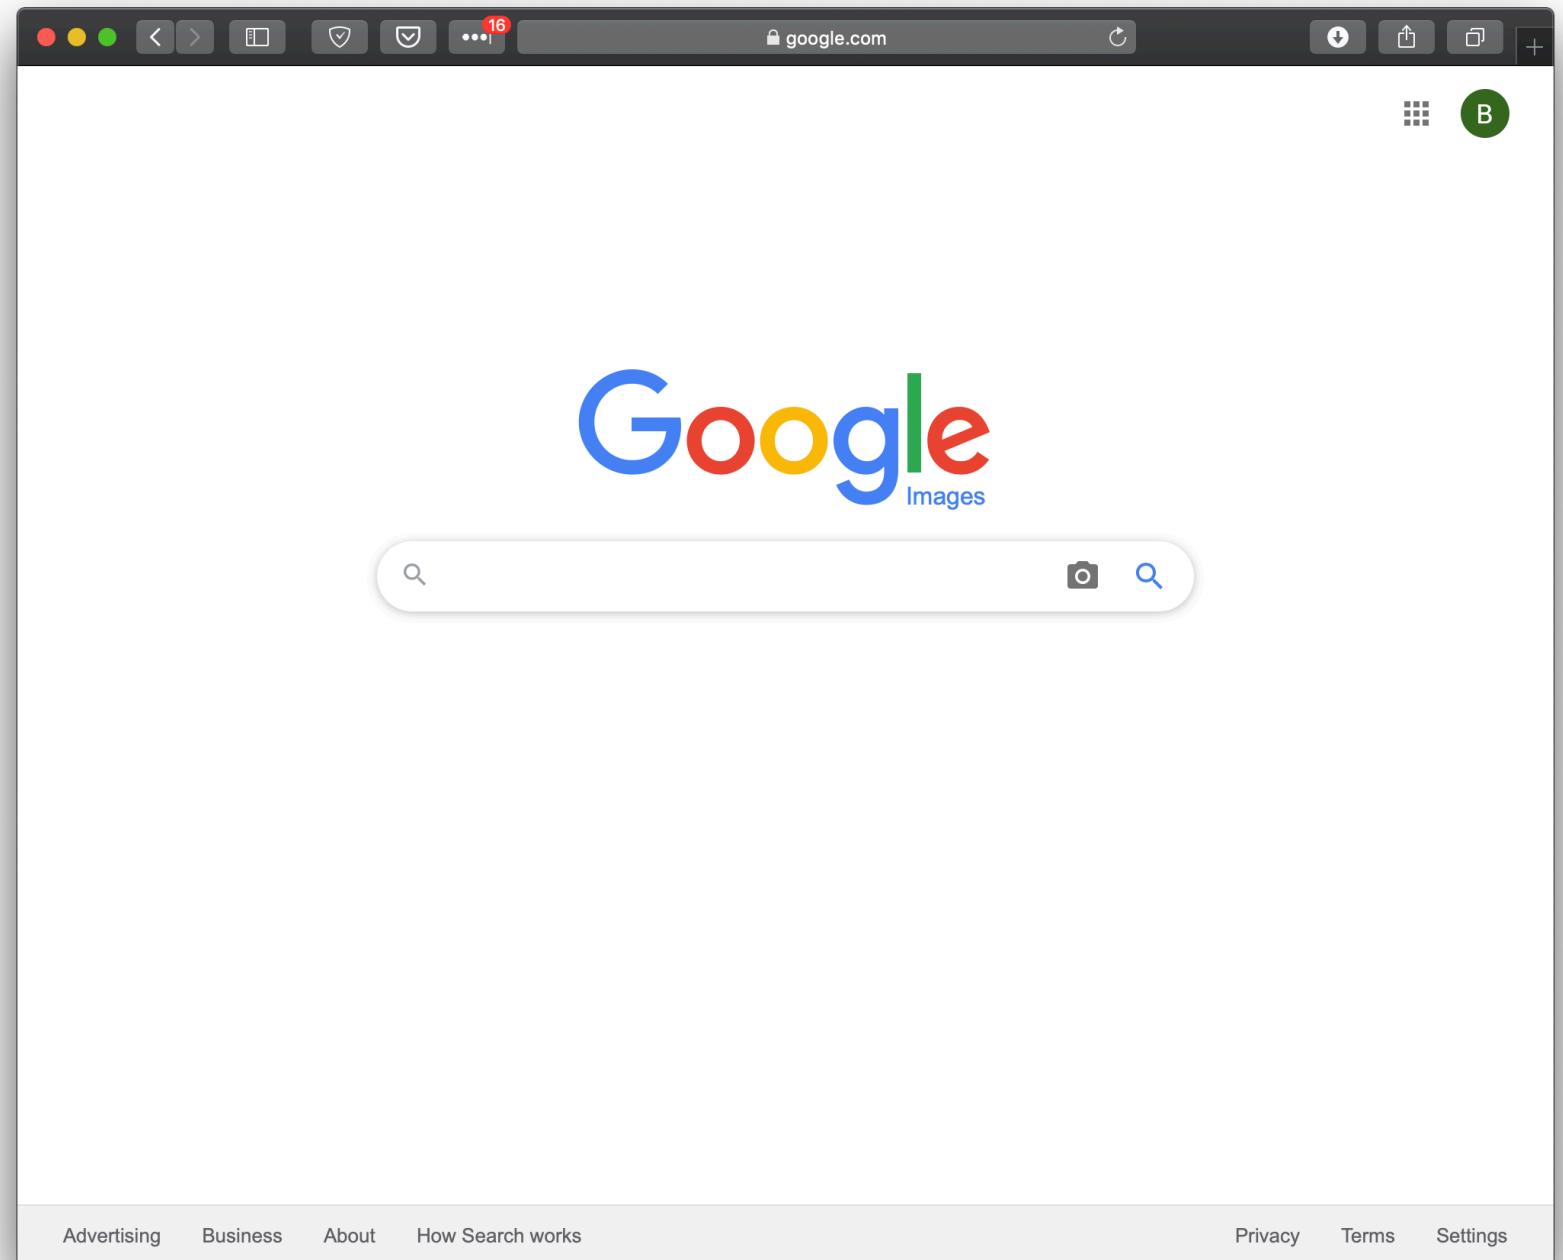

¹⁶ NN/g: Aesthetic and minimalist design

9: Help users recognize, diagnose, and recover from errors¹⁷ ¹⁸

Error messages should be expressed in plain language (no codes), precisely indicate the problem, and constructively suggest a solution.

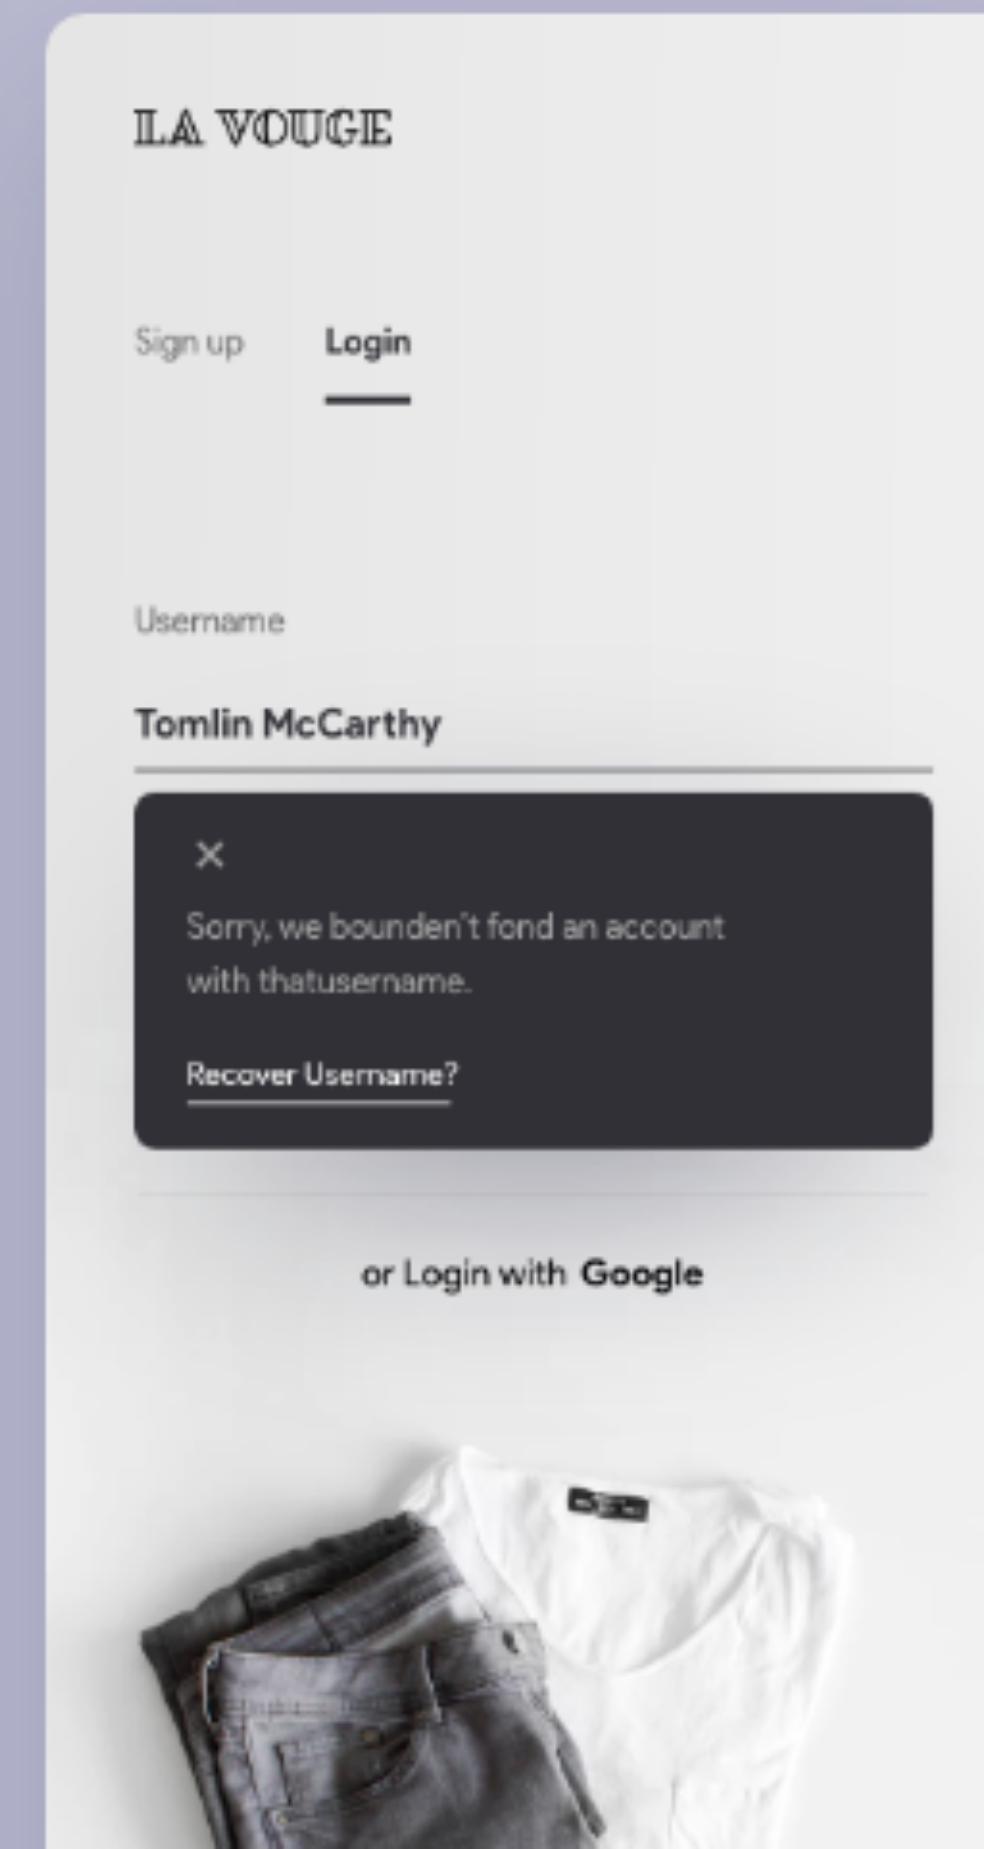


¹⁷ NN/g: Help users recognize, diagnose, and recover from errors

¹⁸ Image source

10: Help and documentation¹⁹ ²⁰

Even though it is better if the system can be used without documentation, it may be necessary to provide help and documentation. Any such information should be easy to search, focused on the user's task, list concrete steps to be carried out, and not be too large.

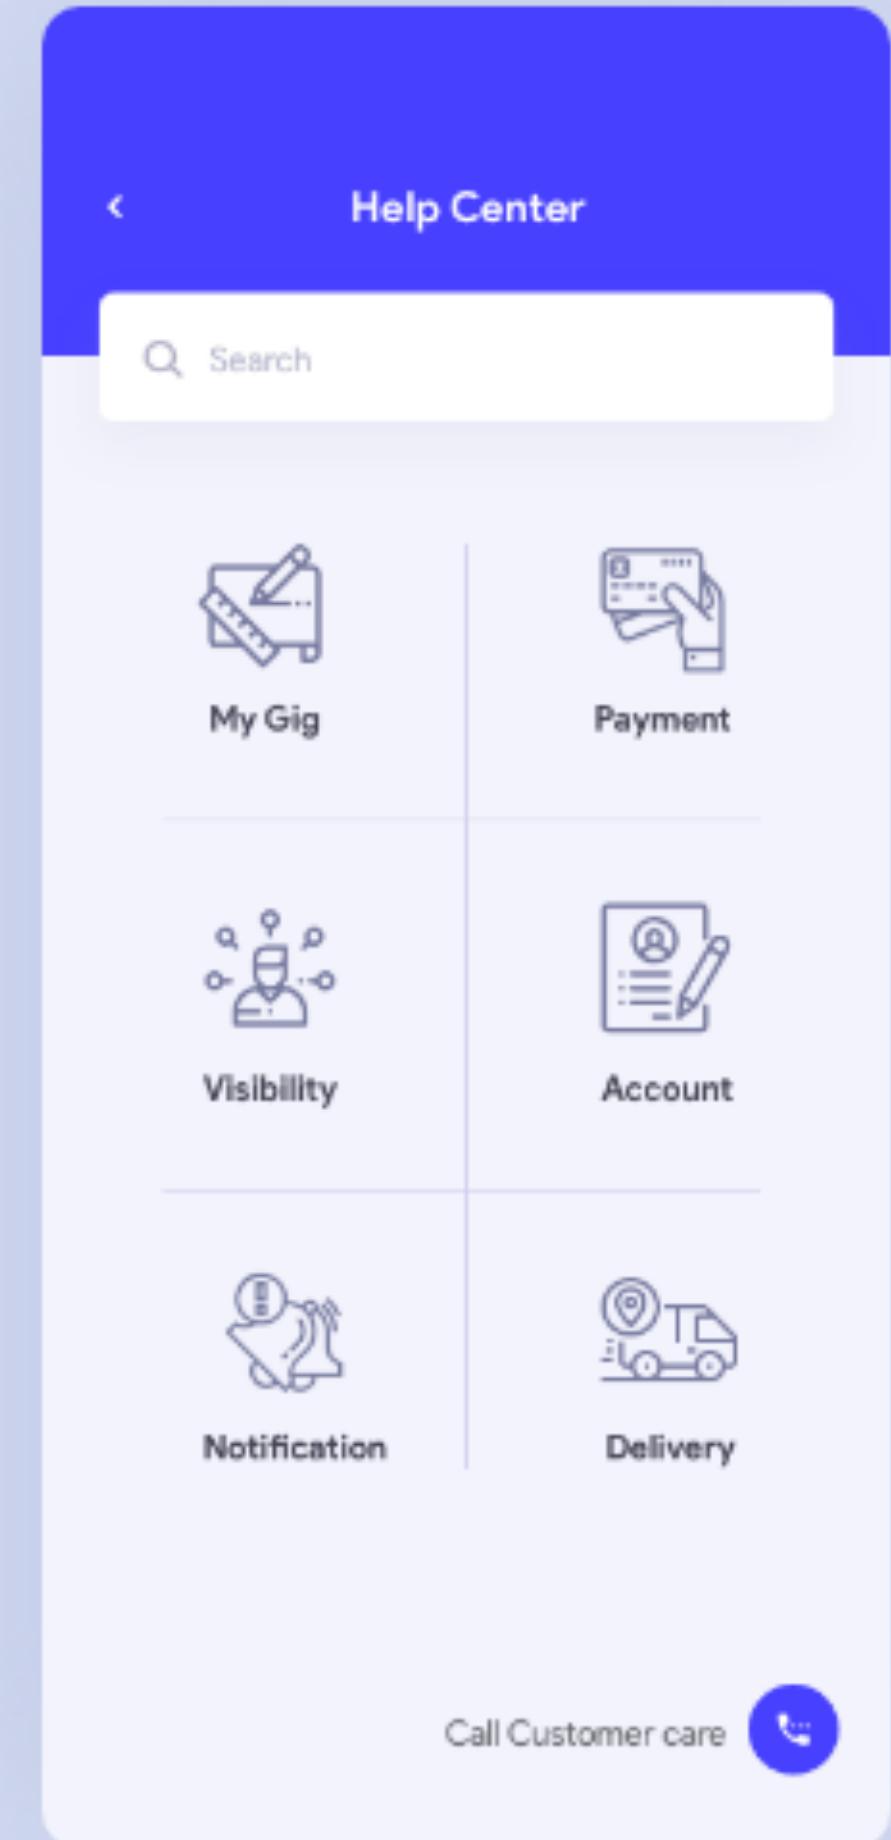


¹⁹ NN/g: Help and documentation

²⁰ Image source

Quiz 1


Complete the Canvas quiz.

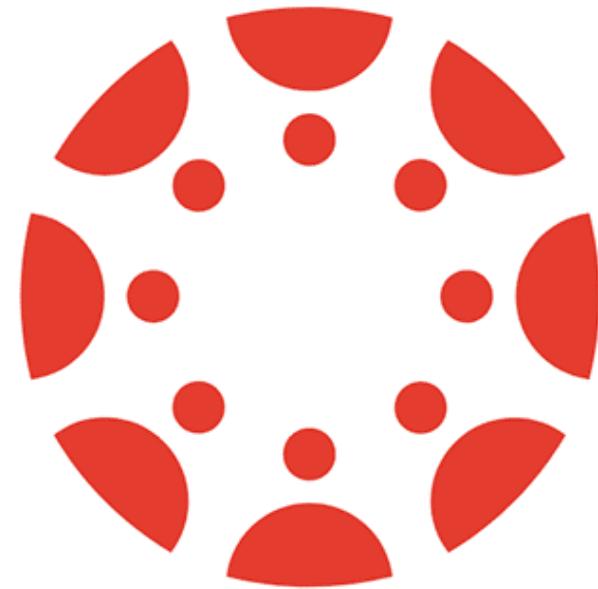

canvas

Process²¹

1. Identify 3–5 usability experts with domain knowledge; determine the heuristics to use;
2. Each inspector individually reviews a feature/screen/page for each heuristic;
3. Inspectors merge and prioritize their findings, brainstorm solutions, report conclusions.

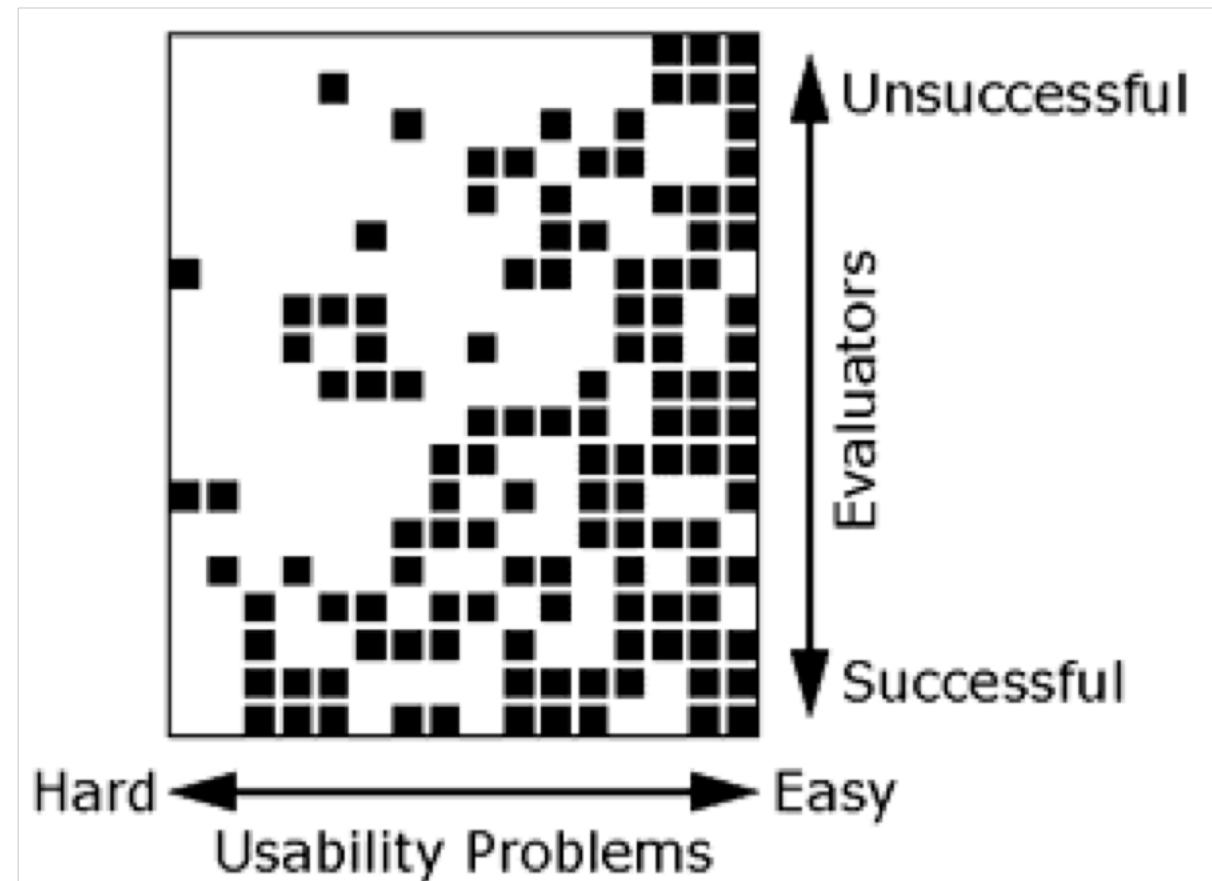


²¹NN/g: [How to Conduct a Heuristic Evaluation](#)

How many evaluators are needed?

The rule of thumb is 3–5.²²

$$ProblemsFound(i) = N(1 - (1 - l)^i)$$

- i independent evaluators
- N total number of usability problems in the interface
- l the proportion of all usability problems found by a single evaluator

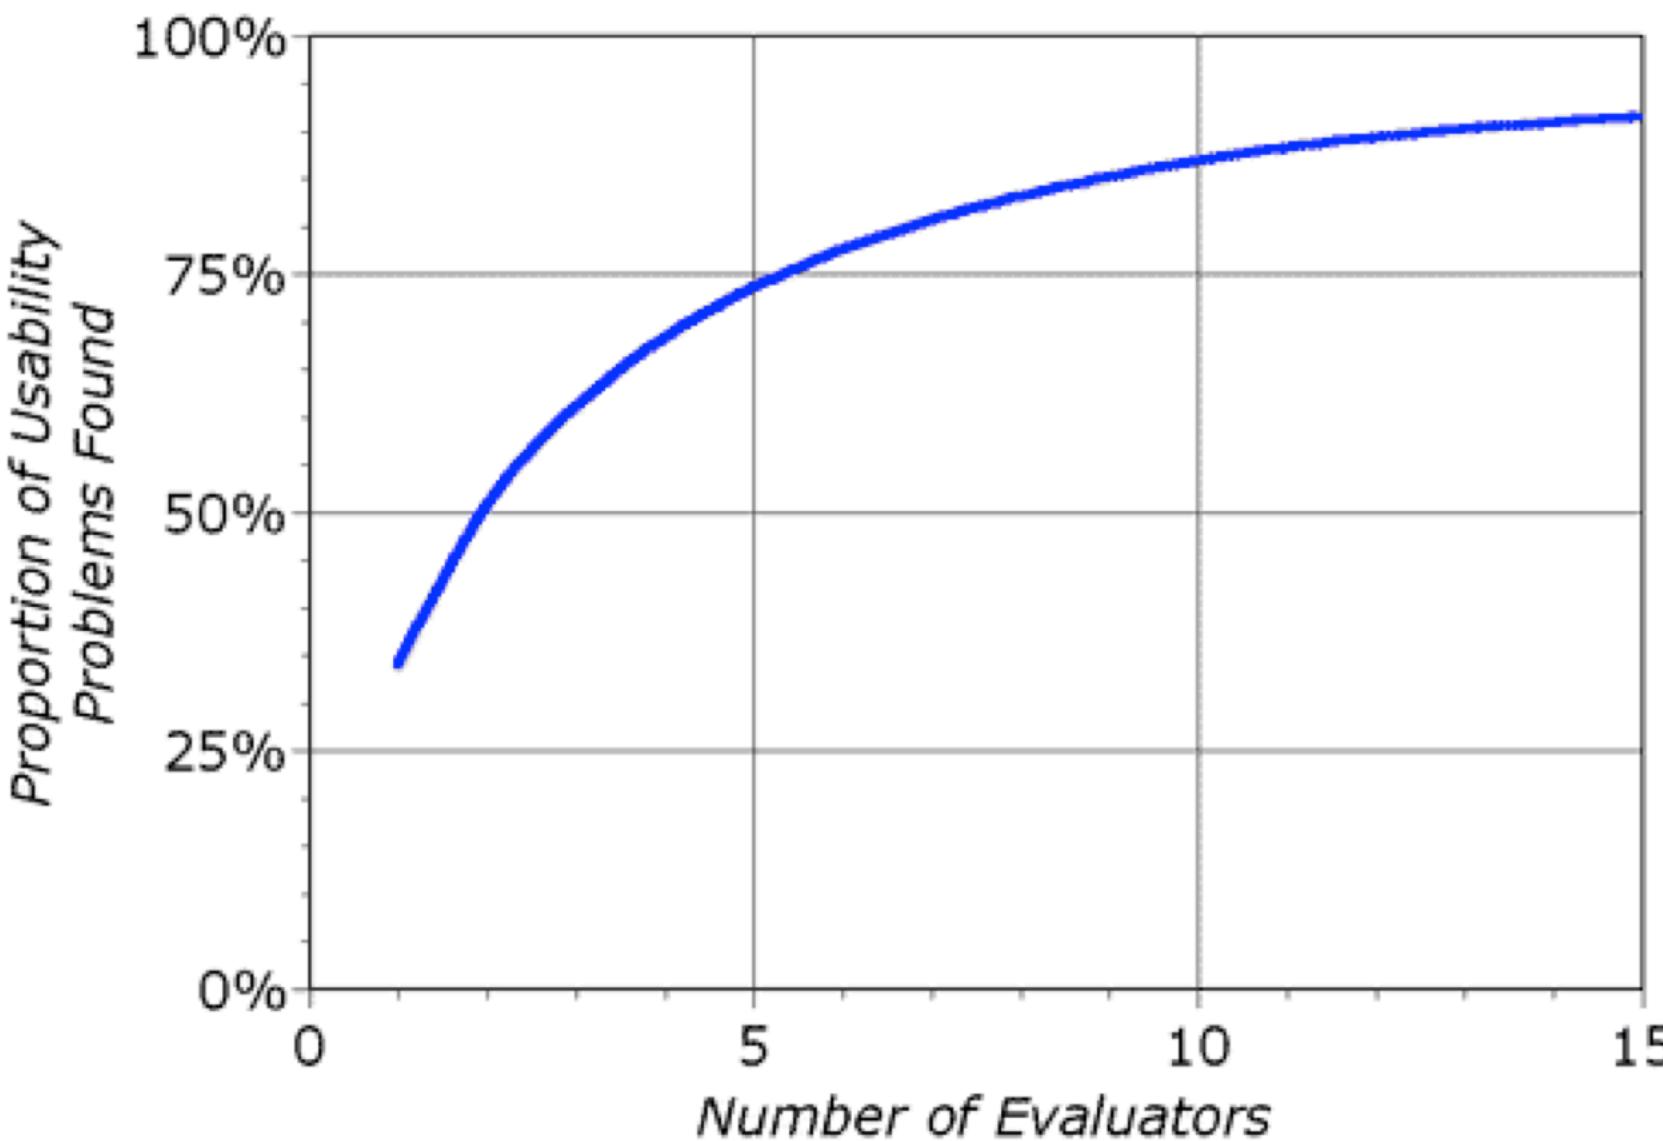

²² [Image source](#)

Heuristic Evaluation Reporting²³

Definition: A document that highlights the top three to five usability problems and suggested solutions.

²³ A good heuristics evaluation report example

Heuristic evaluation reports usually include:

1. Prototype screen, page, location of the problem
2. Name of heuristic
3. Reason for reporting as negative or positive
4. Scope of problem
5. Severity of problem (high/medium/low)
6. Justification of severity rating
7. Suggestions to fix
8. Possible trade-offs (why the fix might not work)

Severity Ratings

Code	Category	Recommendation
4	Usability catastrophe	<i>Imperative to fix before product can be released</i>
3	Major usability problem	<i>Important to fix, so should be given high priority</i>
2	Minor usability problem	<i>Fixing this should be given low priority</i>
1	Cosmetic problem only	<i>Need not be fixed unless extra time is available on project</i>
0	~	<i>Team does not agree that issue impacts system usability</i>

Pros & Cons of Heuristic Evaluation

Pros:

- Inexpensive and intuitive
- Can be used frequently and any time during the design process
- Effective at early stages of design
- Serves as a training tool for designers

Cons:

- Does not capture all aspects of usability
- Does not provide a comprehensive understanding of the interaction
- Might discourage user testing
- May result in false positives

Further Reading on Heuristic Evaluation

- UX Collective article with great examples
- Videos and articles by Jacob Nielsen

In-Class Activity

Heuristic Evaluation of [MyFitnessPal](#)

Design Elements²⁴

- *Add* component
- *Food Dairy* component
- *Nutrition* component

10 Usability Heuristics

Visibility

Show system status, tell what's happening



Freedom

Provide good defaults & undo

Mapping

Use familiar metaphors & language

Consistency

Use same interface and language throughout

Error Prevention

Help users avoid making mistakes

Recognition

Make information easy to discover

Flexibility

Make advanced tasks fluid and efficient

Minimalism

Provide only necessary information in an elegant way

Error Recovery

Help users recognize, diagnose and recover from errors

Help

Use proactive and in-place hints to guide users

²⁴ [UX Collective](#)

Cognitive Walkthrough

Cognitive Walkthrough

Definition: Expert review method where a usability specialist assesses the *learnability* and *discoverability* of a design by posing and answering a set of questions.

What do we need to perform a cognitive walkthrough?

- A prototype
- A user profile
- Set of tasks
- Sequences of actions

Question 1²⁵

Will the user try and achieve the right outcome?



AT&T 8:47 PM 59%

< Search Edit

Apple Inc.

message call video mail pay

main
1 (800) MYAPPLE

homepage
<http://www.apple.com>

work
1 Infinite Loop
Cupertino CA 95014
United States

Notes

Send Message

Share Contact

Favorites Recents Contacts Keypad Voicemail



A screenshot of an iPhone contact screen for "Apple Inc.". The screen shows the Apple logo, contact details (main number, homepage), work address, and a map pin. At the bottom are standard iOS contact management buttons: Favorites, Recents, Contacts, Keypad, and Voicemail.

²⁵ Image source

Question 2

Will the user notice that the correct action is available to them?



Does the design support the user's mental modal, knowledge, and prior experience to achieve the outcome?

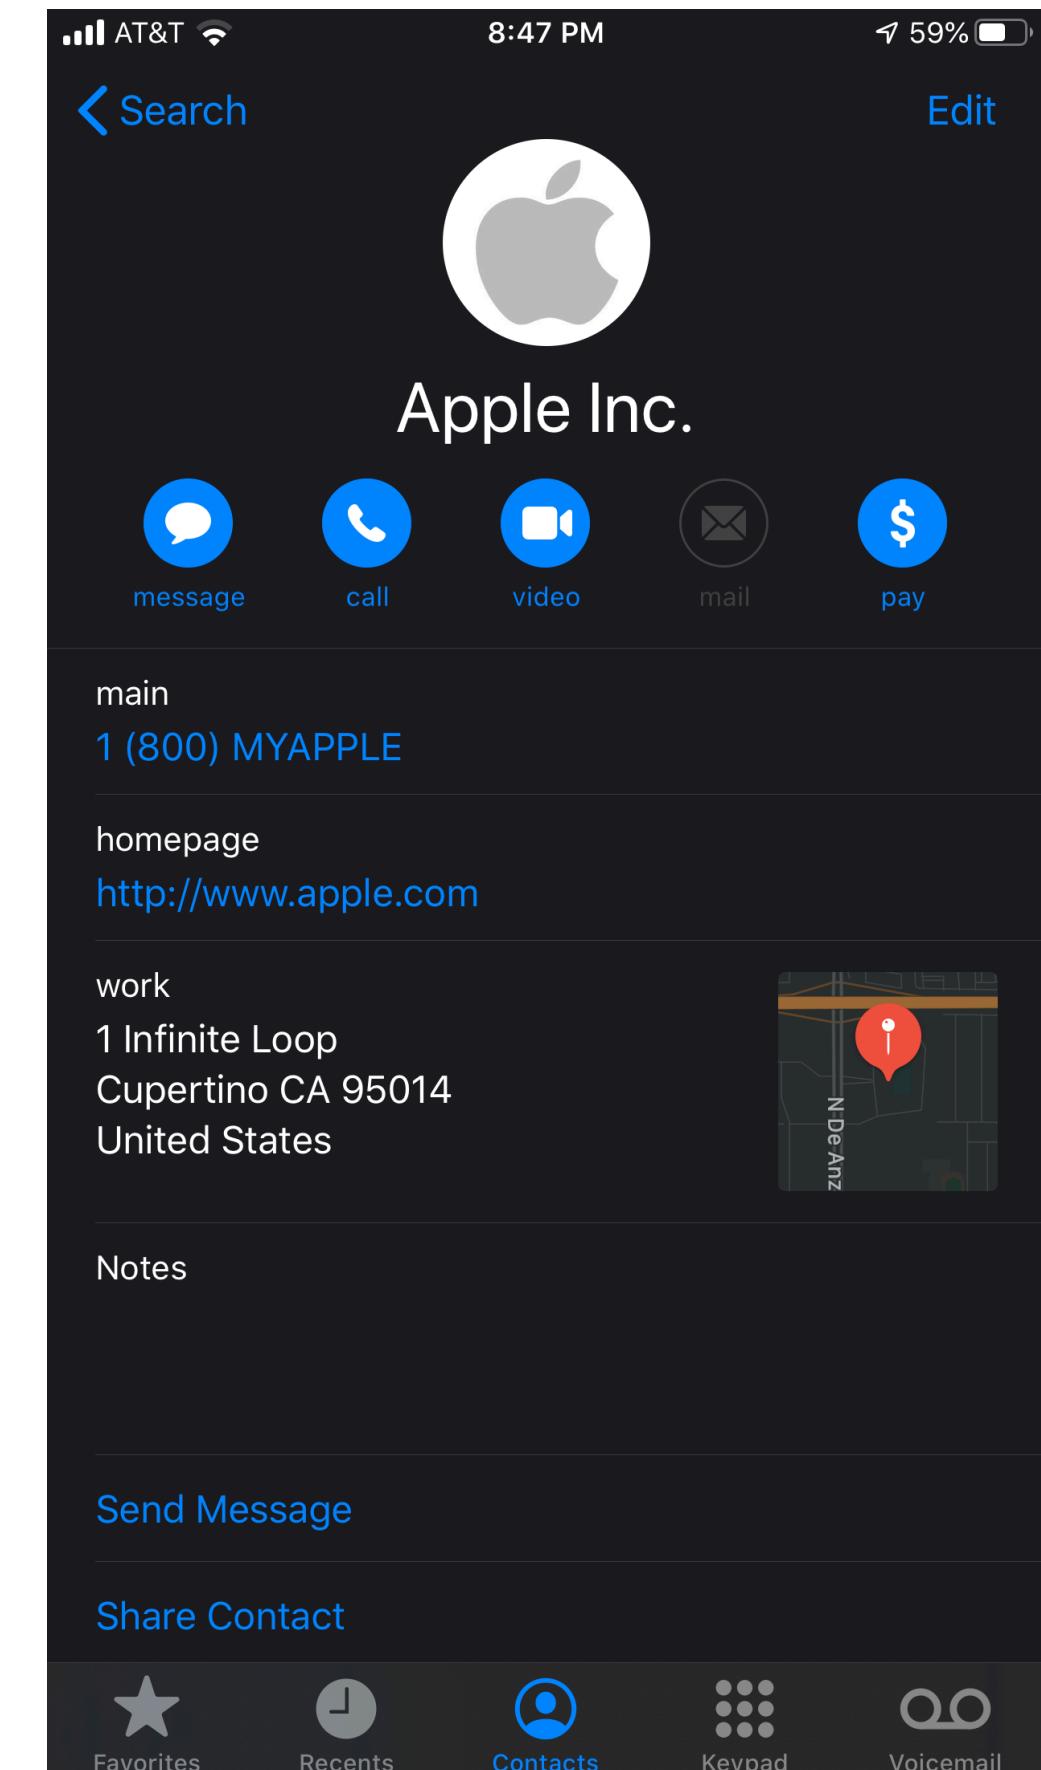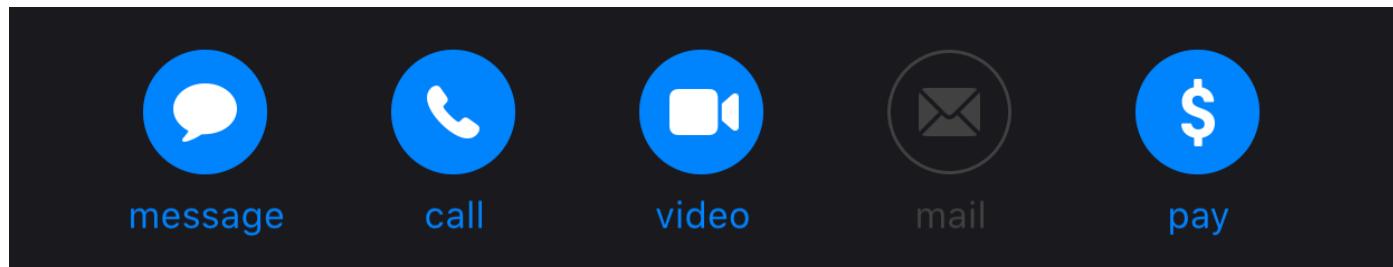

Question 3



Will the user associate the correct action with the outcome they expect to achieve?

Does the visibility, availability, and accessibility of the design element support the action?

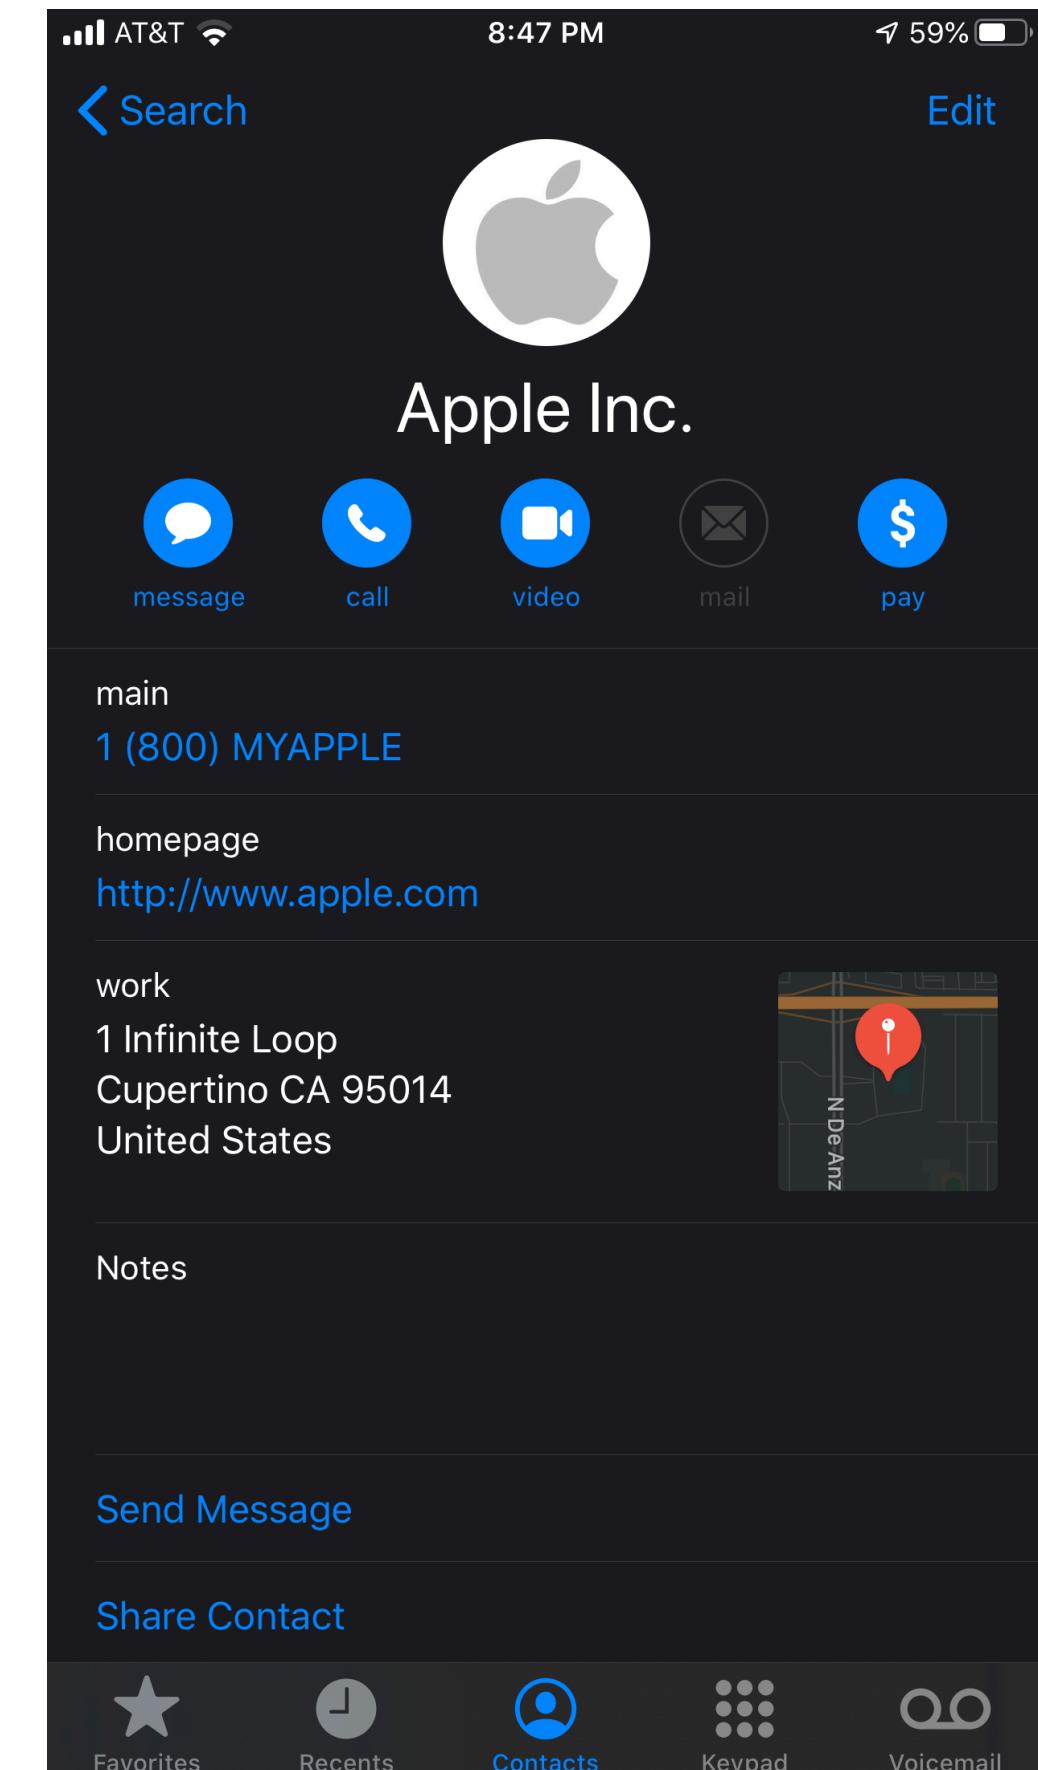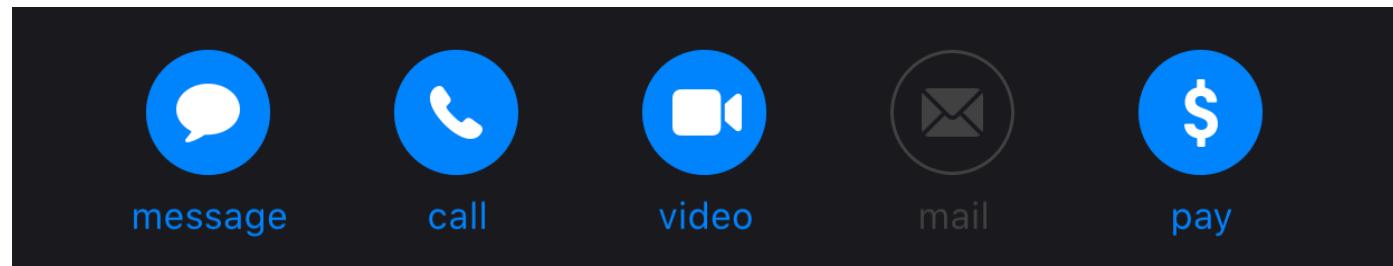

Question 4

If the correct action is performed; will the user see that progress is being made towards their intended outcome?

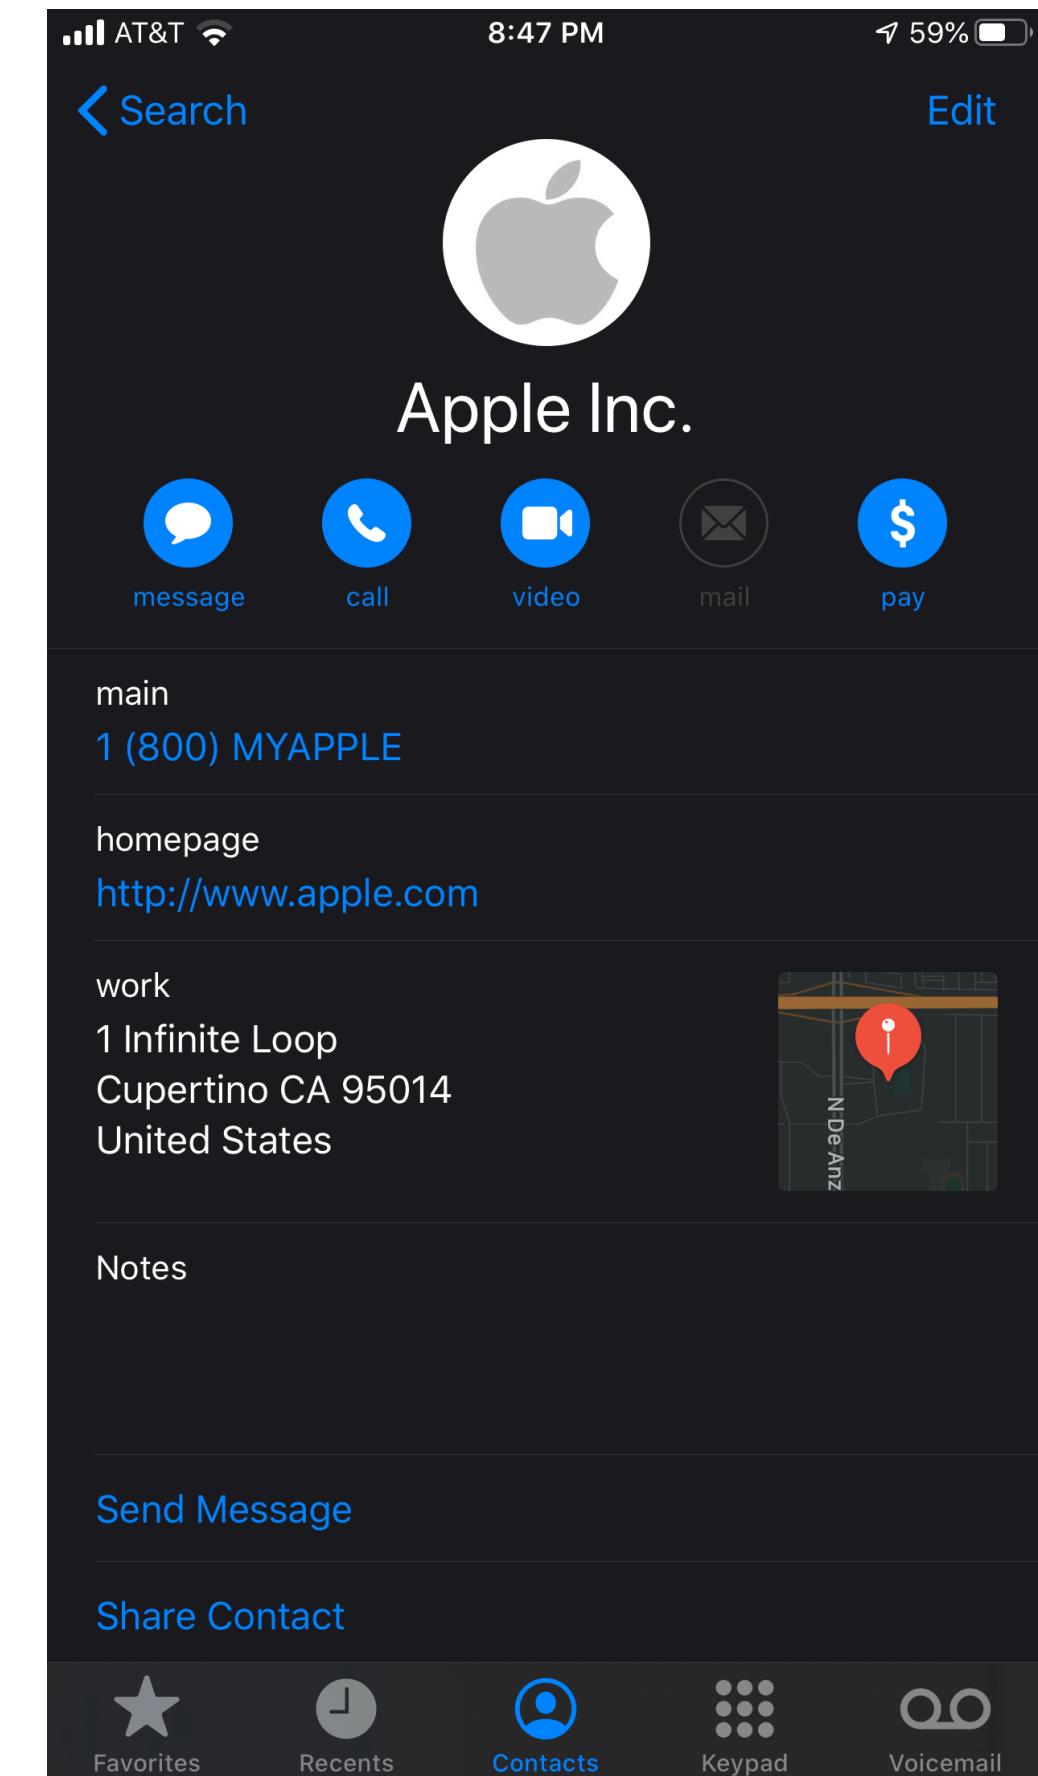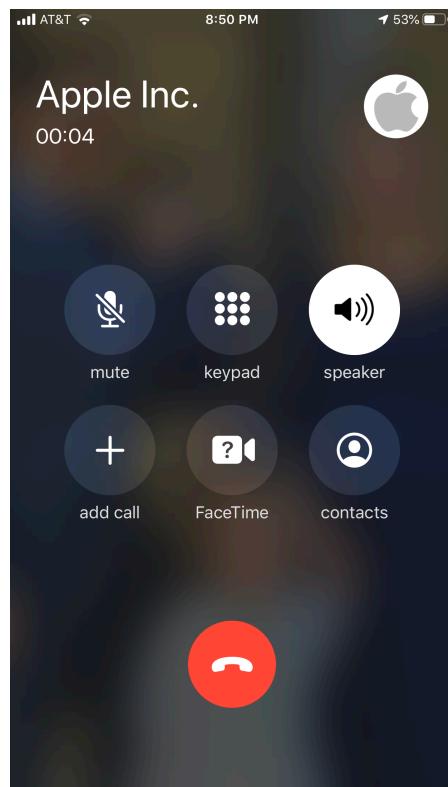

Pros & Cons of Cognitive Walkthrough

Pros:

- Powerful for:
 - Walk-up-and-use interfaces
 - New concepts/forms of interaction
 - Systems designed for various user profiles
- Can be performed frequently and at any stage of the design process

Pros & Cons of Cognitive Walkthrough

Const:


- Focuses only on discoverability/learnability
- Best when used with usability testing

Further Reading on Cognitive Walkthrough

- UX Collective: Assessing usability with Cognitive Walkthrough
- Usability body of knowledge
- Cognitive Walkthroughs
 - Cognitive walkthrough template

Quiz 2

Complete the Canvas quiz.

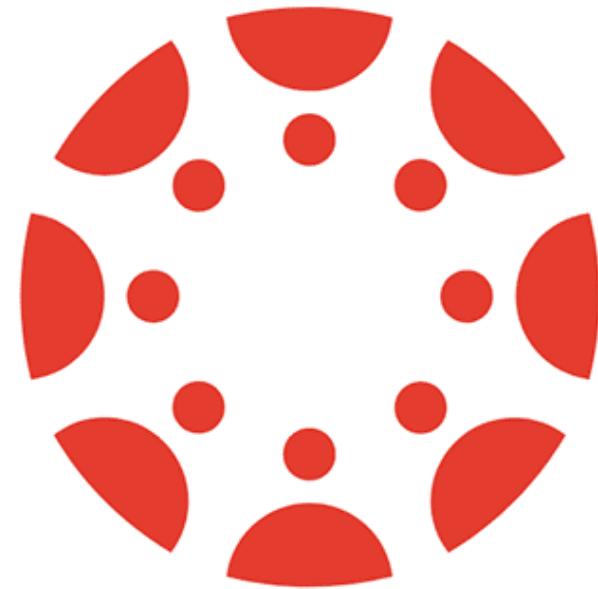

canvas

Quiz 3

Complete the Canvas quiz.



canvas

In-Class Activity

Cognitive Walkthrough of **MyFitnessPal**

Tasks

- Add food item
- Review food item nutrients
- Review daily nutrient intake

Questions

1. Will the user try and achieve the right outcome?
2. Will the user notice that the correct action is available...?
3. Will the user associate the correct action with the outcome they expect...?
4. If the correct action is performed; will the user see that progress is being made towards their intended outcome?


Assignment Preview

React 2 Beta: Usability Heuristics (3 points)

You will practice heuristic evaluation to improve your React 2 α deliverable.

- **Step 1.** Review the heuristics
- **Step 2.** Identify potential violations
- **Step 3.** Develop design recommendations
- **Step 4.** Update your design

Step 1. Review the heuristics²⁶

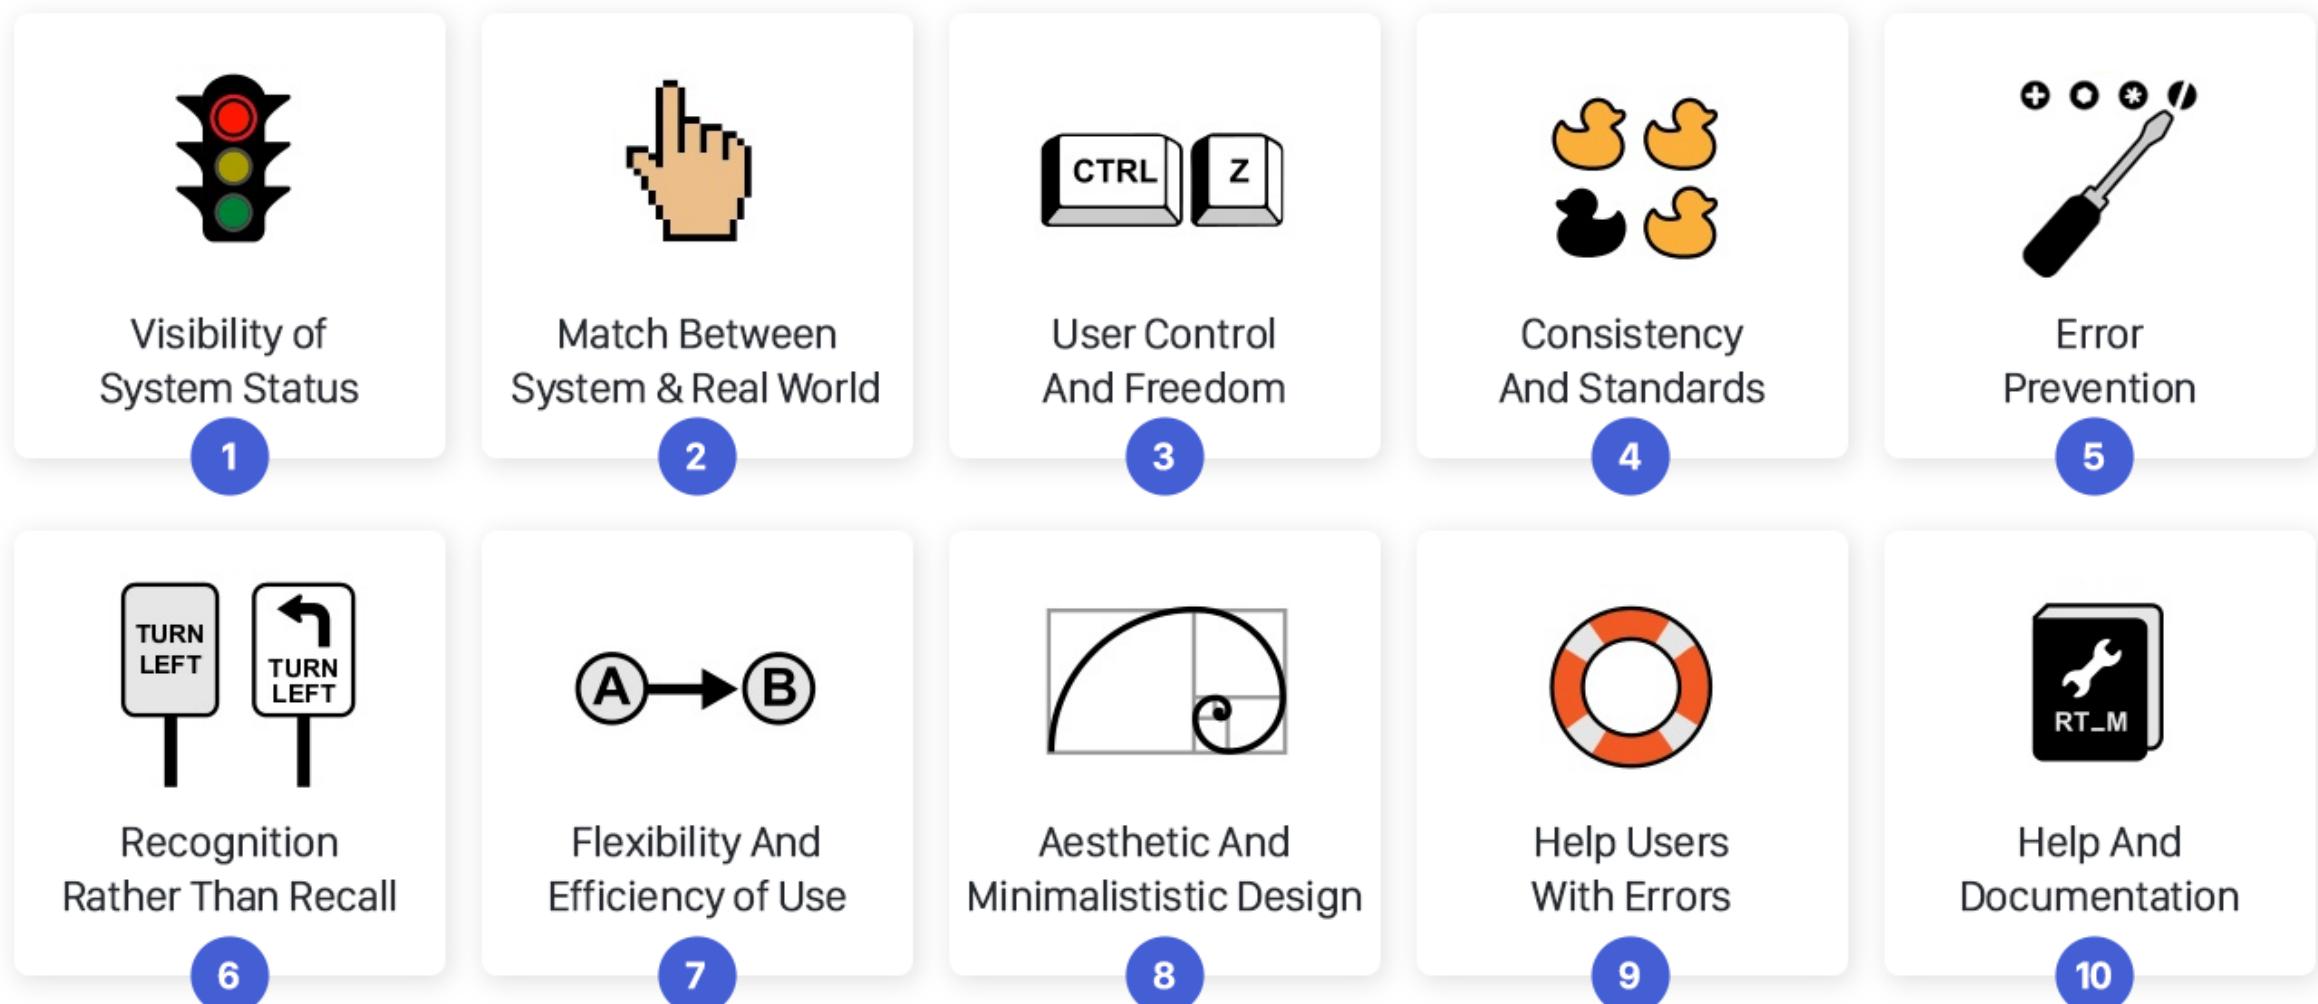

²⁶ [UX Collective](#)

Step 2. Identify potential violations²⁷

Report the violations you identified in a table and mark them on screenshots.

Determine severity.

Usually, heuristic evaluation sheets are used for this step. We will use a simpler table.

Heuristic Evaluation Sheet		Device	Severity
Evaluator	Date	Browser/OS	0 I don't agree that this is a usability problem at all
Website/App	Task/Feature	Task/Feature	1 Cosmetic problem only: need not be fixed unless extra time is available on project
1. Visibility of system status		Issues Please be specified	2 Minor usability problem: fixing this should be given low priority
The system should always keep users informed about what is going on, through appropriate feedback within reasonable time.			3 Major usability problem: important to fix, so should be given high priority
Severity			4 Usability catastrophe: imperative to fix this before product can be released
<input type="radio"/> 0		<input type="radio"/> 1	<input type="radio"/> 2
		<input type="radio"/> 3	<input type="radio"/> 4
2. Match between system and the real world		Issues Please be specified	Recommendation
The system should speak the users' language, with words, phrases and concepts familiar to the user, rather than system-oriented terms. Follow real-world conventions, making information appear in a natural and logical order.			
Severity			Recommendation
<input type="radio"/> 0		<input type="radio"/> 1	<input type="radio"/> 2
		<input type="radio"/> 3	<input type="radio"/> 4

Credit by Hsin-Jou Lin

²⁷ [Image source](#)

Step 3. Develop design recommendations

For each violation, recommend a design solution.


Step 4. Update your design

An updated Adobe XD prototype that will serve as the basis for your Module 1 deliverable.

Good luck!

Quiz 4

Complete the Canvas quiz.

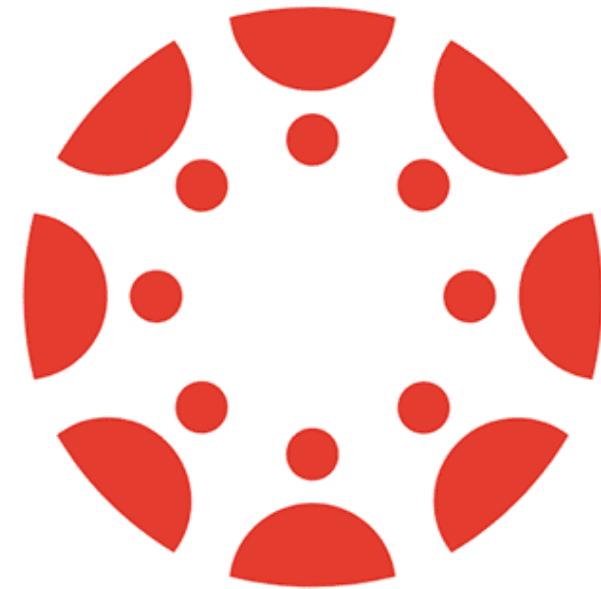

canvas

What did we learn today?

- What is usability evaluation?
- What are rapid/expert methods?
 - Heuristic evaluation
 - Cognitive walkthrough
- React 2 β preview