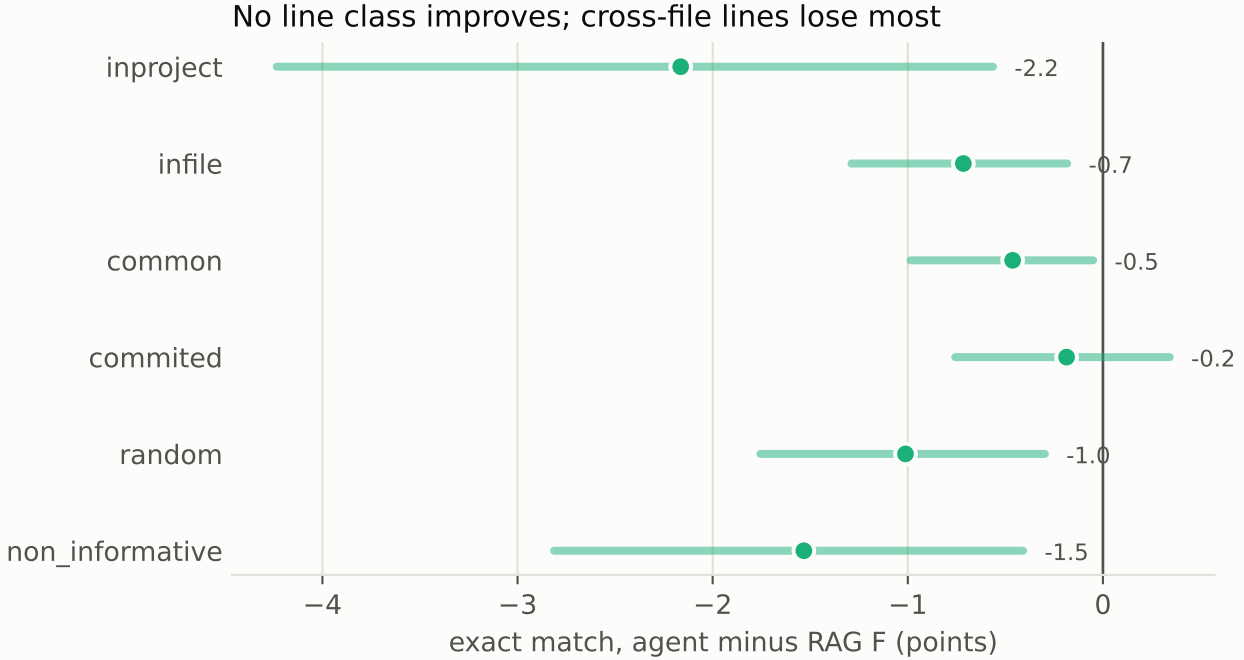

Per class: mean over the datapoints that have lines of the class; bars = paired 95% bootstrap CI over datapoints.
inproject lines need names defined in other project files, the case an agent that can search and read files should help.