# AZ DISPLAYS, INC.

COMPLETE LCD SOLUTIONS

# SPECIFICATIONS FOR LIQUID CRYSTAL DISPLAY

PART NUMBER: ACM 1602K SERIES DATE: August 9, 1999

#### 1.0 MECHANICAL SPECS

1.	Overall Module Size	80.0mm(W) x 36.0mm(H) x max 13.5mm(D) for LED backlight version
		80.0mm(W) x 36.0mm(H) x max 9.5mm(D) for reflective version
2.	Dot Size	0.56mm(W) x 0.61mm(H)
3.	Dot Pitch	0.61mm(W) x 0.66mm(H)
4.	Duty	1/16
5.	Controller IC	KS0066
6.	LC Fluid Options	TN, STN
7.	Polarizer Options	Reflective, Transflective, Transmissive
8.	Backlight Options	LED
9.	Temperature Range Options	Standard (0°C ~ 50°C), Wide (-20°C ~ 70°C)

#### 2.0 ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min	Тур	Max	Unit
Operating temperature (Standard)	Тор	0	-	50	°C
Storage temperature (Standard)	Tst	-10	-	60	°C
Operating temperature (Wide temperature)	Тор	-20	-	70	°C
Storage temperature (Wide temperature)	Tst	-30	-	80	°C
Input voltage	Vin	Vss		Vdd	V
Supply voltage for logic	Vdd- Vss	2.7	-	5.5	V
Supply voltage for LCD drive	Vdd- Vo	3.0	4.6	6.5	V

#### 3.0 ELECTRICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Тур	Max	Unit		
Input voltage (high)	Vih	H level	2.2	-	Vdd	V		
Input voltage (low)	Vil	L level	0	-	0.6	V		
		0°C	-	4.8	5.4			
Recommended LC Driving	Vdd - Vo	25°C	4.2	4.6	-	V		
Voltage (Standard Temp)		50°C	3.9	4.3	-	1		
		-20°C	-	6.4	7.2			
Recommended LC Driving	Vdd -Vo	0°C	-	4.8	-	V		
Voltage (Wide Temp)		50°C	-	4.2	-			
		70°C	3.5	4.0	-			
Power Supply Current	Idd	Vdd=5.0V, fosc=270kHz	-	0.8	1.8	mA		
LED Power Supply Voltage	Vfled	R=6.8Ω	-	4.6	5.0	V		
LED Power Supply Current	Ifled	R=6.8Ω	-	120	300	mA		


### 4.0 OPTICAL CHARACTERISTICS (Ta=25°C, Vdd= 5.0V±0.25V, TN LC fluid)

Item	Symbol	Condition	Min	Тур	Max	Unit
Viewing angle (horizontal)	θ	Cr ≥ 4.0	-25	-	-	deg
Viewing angle (vertical)	ф	Cr ≥ 4.0	-30	-	30	deg
Contrast Ratio	Cr	φ=0°, θ=0°	-	2	-	
Response time (rise)	Tr	φ=0°, θ=0°	-	120	150	ms
Response time (fall)	Tf	φ=0°, θ=0°	-	120	150	ms

#### 4.1 OPTICAL CHARACTERISTICS (Ta=25°C, Vdd= 5.0V±0.25V, STN LC fluid)

Item	Symbol	Condition	Min	Тур	Max	Unit
Viewing angle (horizontal)	θ	Cr ≥ 2.0	-60	-	35	deg
Viewing angle (vertical)	ф	Cr ≥ 2.0	-40	-	40	deg
Contrast Ratio	Cr	φ=0°, θ=0°	-	6	-	
Response time (rise)	Tr	φ=0°, θ=0°	-	150	250	ms
Response time (fall)	Tf	φ=0°, θ=0°	-	150	250	ms


#### 5.0 BLOCK DIAGRAM

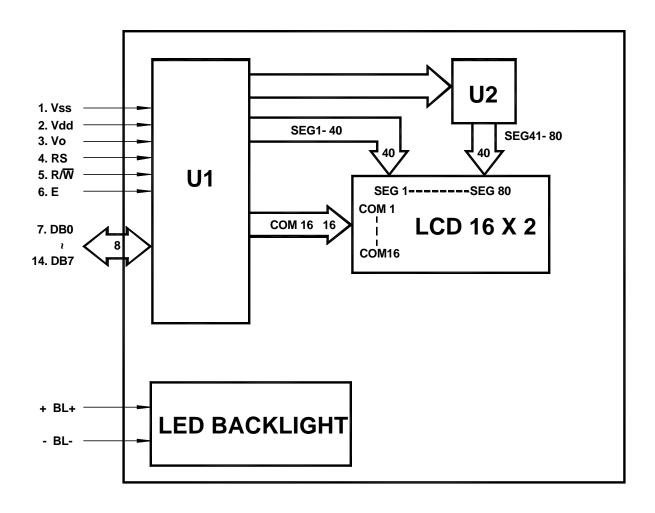


#### **6.0 PIN ASSIGNMENT**

Pin No.	Symbol	Function					
1	Vss	Ground					
2	Vdd	+5V					
3	Vo	LCD contrast adjust					
4	RS	Register select					
5	R/W	Read / write					
6	Е	Enable					
7	DB0	Data bit 0					
8	DB1	Data bit 1					
9	DB2	Data bit 2					
10	DB3	Data bit 3					
11	DB4	Data bit 4					
12	DB5	Data bit 5					
13	DB6	Data bit 6					
14	DB7	Data bit 7					
+	BL+	Power Supply for BL+					
-	BL-	Power Supply for BL-					

#### 7.0 POWER SUPPLY



 $S {\hbox{\it TANDARD TEMP RANGE}}$ 



WIDE TEMP RANGE

 $Vr = 10K\Omega \sim 20K\Omega$ 

#### **8.0 TIMING CHARACTERISTICS**

Item	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Enable cycle time	t <sub>c</sub>	Fig. a, Fig. b	500	-	-	ns
Enable pulse width	t <sub>w</sub>	Fig. a, Fig. b	220	-	-	ns
Enable rise/fall time	$t_{\scriptscriptstyle R},t_{\scriptscriptstyle F}$	Fig. a, Fig. b	-	-	25	ns
RS, R/W set up time	t <sub>su</sub>	Fig. a, Fig. b	40	-	-	ns
RS, R/W hold time	t <sub>∺</sub>	Fig. a, Fig. b	10	-	-	ns
Data delay time	t <sub>□</sub>	Fig. b	-	-	120	ns
Data set up time	<b>t</b> <sub>DSU</sub>	Fig. a	60	-	-	ns
Data hold time	t <sub>DH</sub>	Fig. a, Fig. b	20	-	-	ns

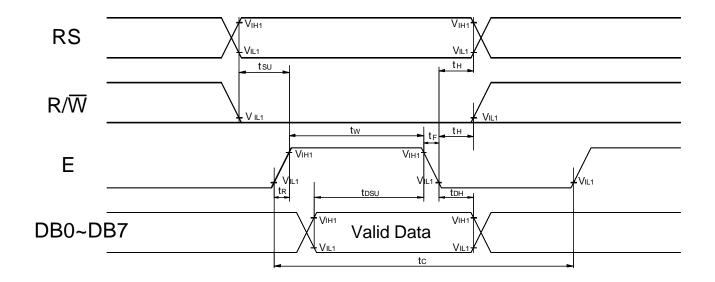


Fig. a Interface timing (data write)


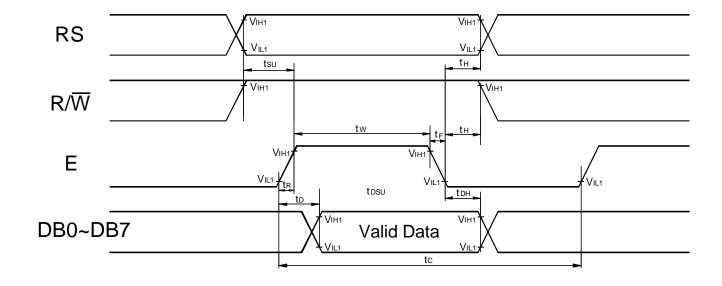


Fig. b Interface timing (data read)

#### 9.0 MECHANICAL DIAGRAM

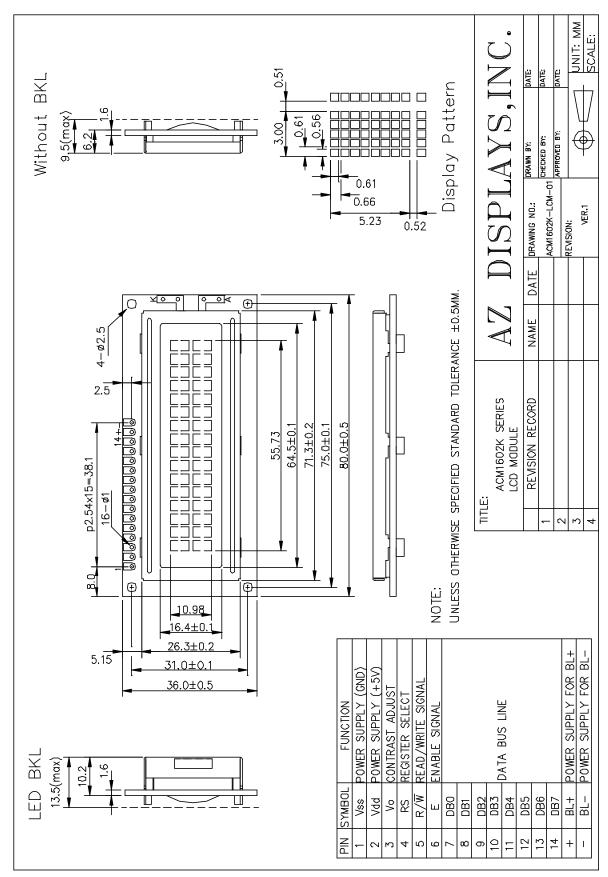

#### **10.0 RELIABILITY TEST**

			Evaluation	ons and Assessment*	
Storage Condition	Content	Current	Oozing	Contrast	Other Appearances
		Consumption			
Operation at high	40 <b>°</b> C,90%	Twice initial	none	More than 80% of	No abnormality
temperature and	RH,240hrs	value or less		initial value	
humidity					
High temperature	60 <b>º</b> C,	Twice initial	none	More than 80% of	No abnormality
storage	240hrs	value or less		initial value	
Low temperature	-20°C,	Twice initial		More than 80% of	No abnormality
storage	240hrs	value or less		initial value	

<sup>\*</sup>Evaluations and assessment to be made two hours after returning to room temperature (25°C±5°C).

<sup>\*</sup>The LCDs subjected to the test must not have dew condensation.

#### 11.0 DISPLAY INSTRUCTION TABLE

COMMAND	R S	R/ W	DB 7	DB 6	DB 5	DB 4	DB 3	DB 2	DB 1	DB 0	DESCRIPTION	Executing time fosc=250khz
Clear Display	0	0	0	0	0	0	0	0	0	1	Clears Display & Returns to Address 0.	1.64ms
Cursor at Home	0	0	0	0	0	0	0	0	1	х	Returns Cursor to Address 0. Also returns the display being shifted to the original position. DDRAM contents remain unchanged.	1.64ms
Entry Mode Set	0	0	0	0	0	0	0	1	I/D	S	I/D: Set Cursor Moving Direction I/D=1: Increment I/D=0: Decrement	40µs
											S: Specify Shift of Display S=1: The display is shifted S=0: The display is not shifted	
Display ON/OFF Control	0	0	0	0	0	0	1	D	С	В	Display D=1: Display on D=0: Display off Cursor C=1: Cursor on C=0: Cursor off Brink B=1: Brink on B=0: Brink off	40µs
Cursor / Display Shift	0	0	0	0	0	1	S/C	R/L	х	х	Moves cursor or shifts the display w/o changing DD RAM contents S/C=0: Cursor Shift (RAM unchanged) S/C=1: Display Shift (RAM unchanged) R/L=1: Shift to the Right R/L=0: Shift to the Left	40µs
Function Set	0	0	0	0	1	DL	N	F	x	x	Sets data bus length (DL), # of display lines (N), and character fonts (F). DL=1: 8 bits F=0: 5x7 dots DL=0: 4 bits F=1: 5x10 dots N=0: 1 line display N=1: 2 lines display	40µs
Set CG RAM Address	0	0	0	1	_	aracte dress	er Gene	erator (0	CG) R	ΑM	Sets CG RAM address. CG RAM data is sent and received after this instruction.	40µs
Set DD RAM Address	0	0	1			Data Addre		(DD) RAM Address /		/	Sets DD RAM address. DD Ram data is sent and received after this instruction.	40µs
Busy Flag / Address Read	0	1	B F			s cour M add	nter use ress	ed for b	oth D	D &	Reads Busy Flag (BF) and address counter contents.	40µs
Write Data	1	0				W	/rite Da	ta			Writes data into DDRAM or CGRAM.	46µs
Read Data	1	1				R	ead Da	ıta			Reads data from DDRAM or CGRAM.	46µs

x: Don't Care

#### 12.0 STANDARD CHARACTER PATTERNS

Lower Bits	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
xxxx0000	CG RAM (1)			0	a	P	*	P					9	=	O.	p
xxxx0001	(2)			1	A	Q	a	4				P	手	4	i <b>m</b>	9
xxxx0010	(3)			2	B	R	b	r				4	ij	Х,	űL,	0
xxxx0011	(4)		#	3	C	5	C	S			L	Ţ	<b></b>	Ħ	Ŵ	9
xxxx0100	(5)		\$	4	D	T	d	t.			٠,	I	ŀ	þ	Н	35
xxxx0101	(6)		74	5	E	U	e	u				7	ナ	ュ	6	Ü
xxxx0110	(7)		&	6	F	Ų	f	Ų			7	Ħ		3	P	Σ
xxxx0111	(8)		7	7	G	Ш	9	W			7	<b>†</b>	X	Ī	9	Л
xxxx1000	(1)		(	8	H	X	h	X			4	7	木	IJ	5	X
xxxx1001	(2)		)	9	I	Y	i	y			Ċ	፟፞፞፞፞	Į	Ib	-1	Ч
xxxx1010	(3)		*		J	Z	j	Z			I		ι'n	b	j	Ŧ
xxxx1011	(4)		+	7	K		k	{			才	ţ	E		×	万
xxxx1100	(5)		7	<	L	¥	1				ţ	<u>:</u> ,	7	7	4-	Ħ
xxxx1101	(6)				M	]	m	}			1	Z	ኅ	_,	丰	-
xxxx1110	(7)			>	Ы	^	n	÷			3	t	市	***	ក	
xxxx1111	(8)		.,**	?			0	+				y	Ţ		Ö	

Note: The character generator RAM is the RAM with which the user can rewrite character patterns by program.