

Experiment No: 02

Date : \_\_\_\_\_

Roll No: \_\_\_\_\_

**Aim : Write alphabets and numerical.**

**Theory:**

**Lettering:**

Lettering in Engineering drawing is the process of writing titles, subtitles, symbols, dimension value, notes, and other elements on a drawing. Lettering is used to specify details of an object on a drawing. Lettering is one type of freehand drawing. Technical lettering is the process of forming letters, numerals, and other characters in technical drawing. It is used to describe, or provide detailed specifications for, an object.

**Types of lettering:**

1. Single stroke letter
2. Double Stroke letter

1. Single stroke letter:

Thickness in single stroke lettering is obtained by a single stroke of pencil or ink pen.

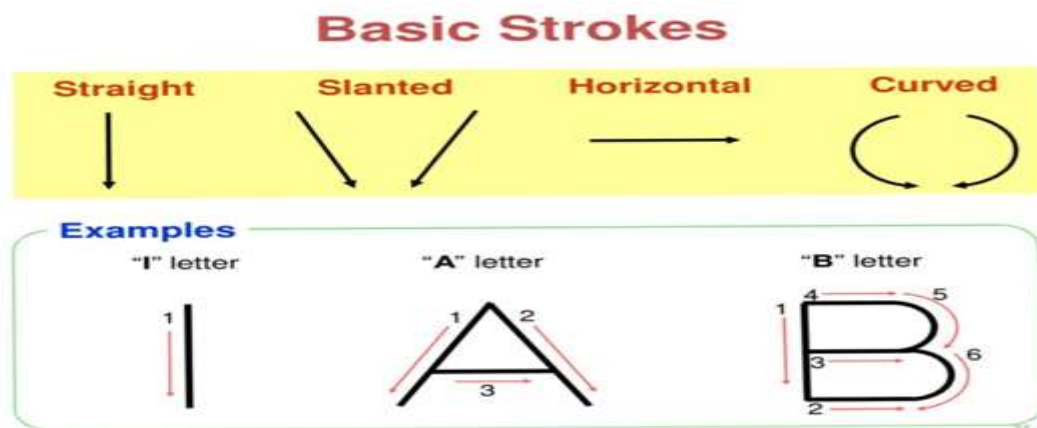


Fig : Single stroke letters

## **2. Double stroke letter:**

In Double Stroke Lettering the line width is greater than that of Single Stroke Lettering.



Fig : Double stroke letters

### **Lettering Rules:**

1. Draw letters as simple as possible. Artistic or cursive lettering should be strictly avoided.
2. Draw letters symmetrical about the vertical axis or horizontal axis. Asymmetric letters like, F, R, Z, 4, etc., may be drawn as they are.
3. Round-off the sharp corners wherever necessary, e.g., D, P, S, etc.
4. Draw all letters legible and uniform.
5. The height of all the letters in one line should be the same.
6. Use single stroke vertical CAPITAL letters as much as possible.

### **Problem Statements :**

1. Write following alphabets and numbers using single stroke type
  1. A
  2. P
  3. 2
  4. 5

### **Conclusion :**