MRT Daily

User Guide

MPT — Million Precision Time · MRT outlet

For the manager of the **MPT MRT outlet**. This app replaces the Excel files for **Stock Balance**, **Bank In** and **Month Sale**.

You do not need the internet. The app **saves by itself**, so there is no Save button for the stock.

1. Opening the app

Double-click the **MRT Daily** icon on the desktop.

At the top of the screen you will see:

- **Today's date**, under "MRT OUTLET".
- ✔ **Saved** (green), which means everything is safe. If it shows **NOT SAVED!** in red, call for help.
- **中文 / English**, to switch the screens between English and Simplified Chinese (简体中文). The app remembers your choice. Printouts always stay in English, the same as the HQ report.
- **A− / A+**, to make the writing smaller or bigger.

Below that are the **tabs**. Click a tab to open that page:

Tab	What it is for
Stock Balance	Watches sold today (S.OUT)
Battery	Batteries sold today
Strap	Straps sold today
Bank In	The day's sale, and money banked in
Month Sale	The whole month in one table
Settings	Language, shop details, old reports, backups

Colours used on every page

Colour	Meaning
Yellow column	Where you type every day
White box	You can type here when needed
Green number	Worked out by the app, so you cannot type here
Orange number	SHOP is different from BAL (stock waiting for HQ)

Colour	Meaning
Red box	Not a number, so check what you typed


2. Every morning: Start New Day

Do this **once every morning**, before keying in anything.

1. Open the **Stock Balance** tab.
2. Press the green **Start New Day** button.
3. The new report date is **always today's date** (taken from the computer). Press **Yes, start new day**.

After that, the button turns grey and reads ✔ **Today's report is open**. Pressing it again the same day does nothing, so the date can never jump ahead.

> If the shop was closed for a few days, that's fine. Start New Day goes straight to today.

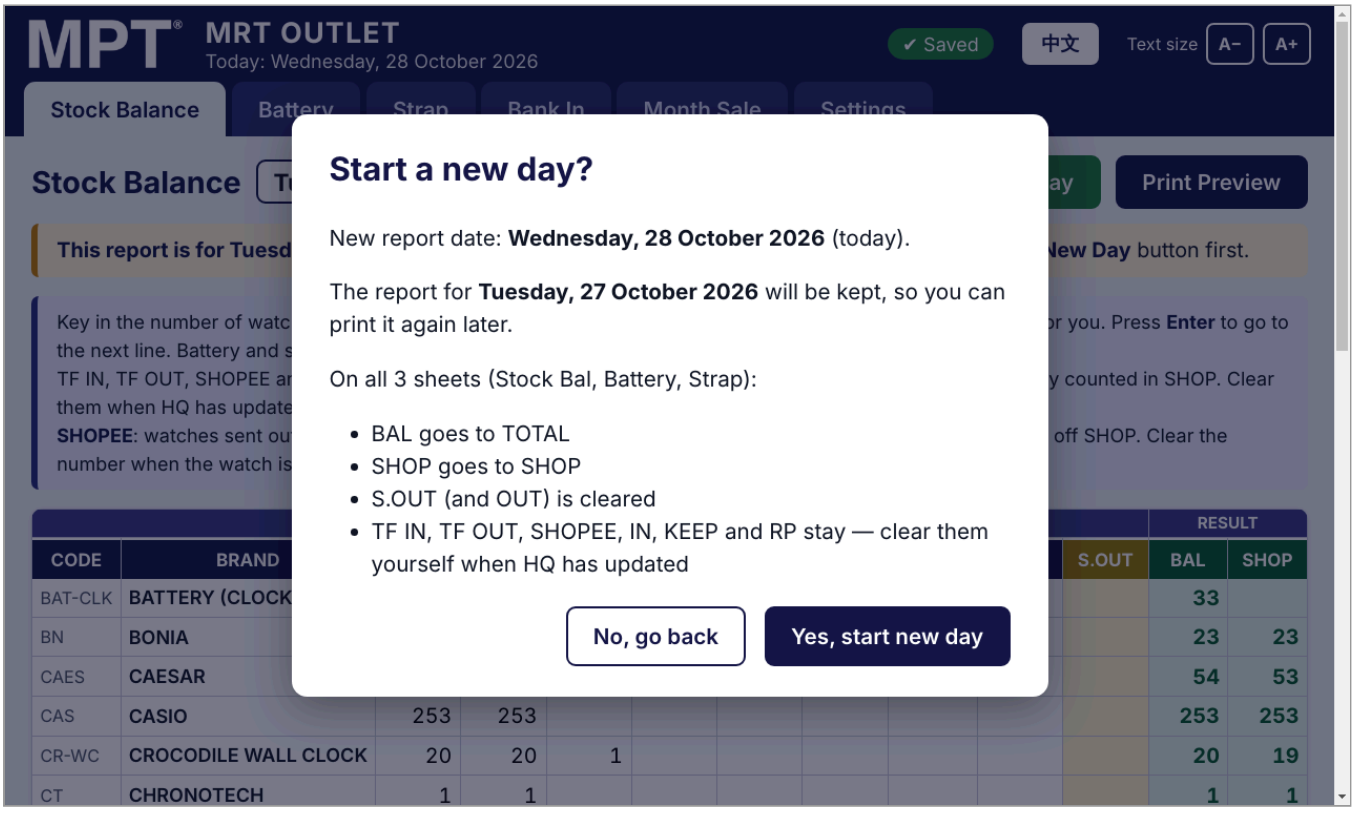

The app now does what you used to do by copy and paste, on all 3 sheets (Stock Bal, Battery, Strap):

- BAL goes to TOTAL
- SHOP goes to SHOP
- **S.OUT** (and OUT on Battery / Strap) is cleared
- **TF IN, TF OUT, SHOPEE, IN, KEEP and RP stay.** Clear them yourself when HQ has updated (see section 3).

Yesterday's report is kept, so you can print it again later (see section 9).


> If you forget, a **yellow note** at the top reminds you that the report is for an earlier day.
>
> **Made a mistake?** Just change the number in the box. Every number on the sheet (TOTAL and SHOP too) can be edited.
>
> The date comes from the computer's clock. If the report ever shows a date **later than today**, the computer's date was wrong. Fix the Windows date, then press **Start New Day** to change the report to today.

3. Watches sold: Stock Balance tab

1. Find the brand.
2. Click the **yellow S.OUT** box on that line.
3. Type the **number of watches sold** (the quantity, not the price).
4. Press **Enter** to go down to the next brand.

Moving between boxes: use the arrow keys ↑ ↓ ← → (or **Enter** to go down). Inside a number, ← and → first move the cursor; at the edge of the number they jump to the next box. This works on every table.

BAL and **SHOP** (green) change straight away. The **TOTAL** line at the bottom adds up TOTAL, S.OUT and BAL (no SHOP total).

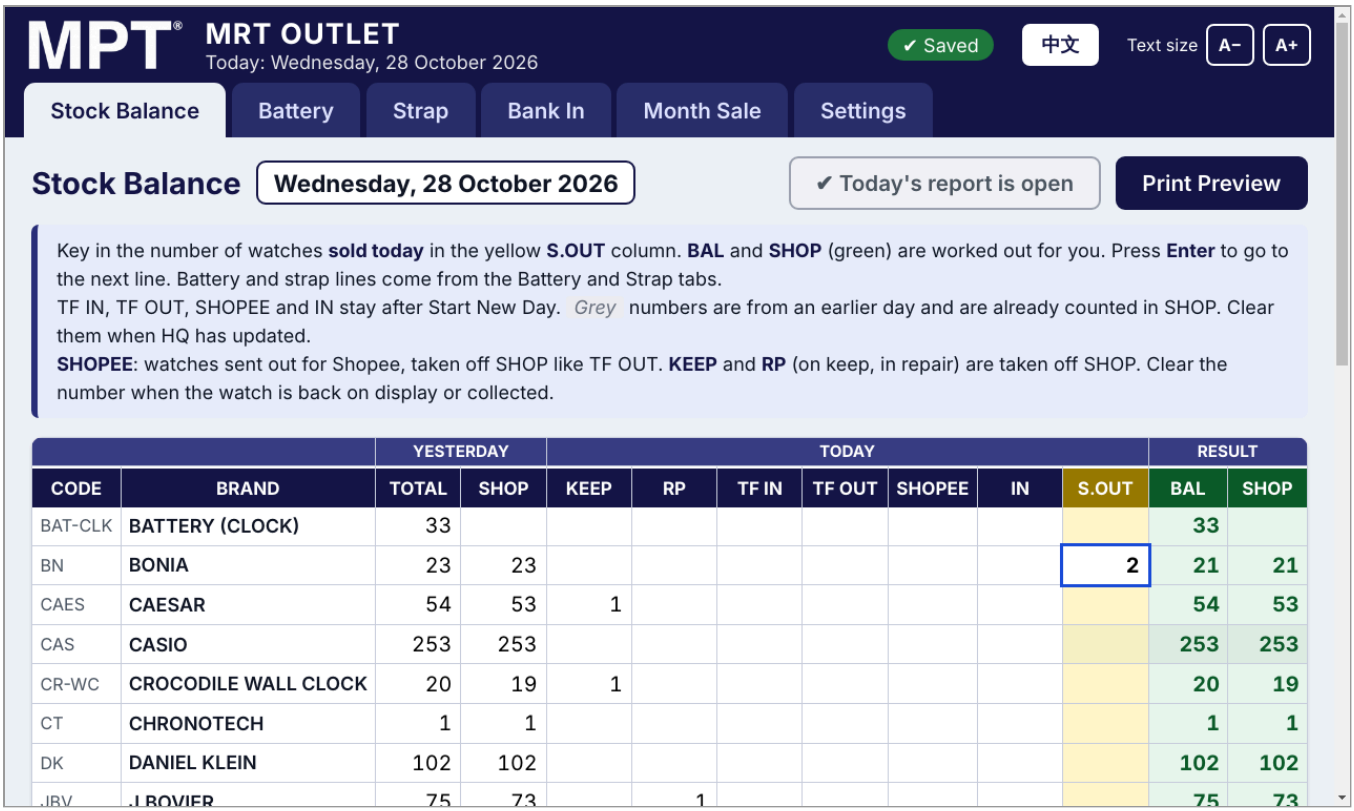

The other columns

Column	What to type
TOTAL / SHOP (yesterday)	Filled in by Start New Day. Change only when HQ gives a new number.
KEEP / RP	Watches on keep, in repair. They are **taken off SHOP** and stay from day to day.
TF IN	Watches transferred **in** from another outlet
TF OUT	Watches transferred **out** to another outlet
SHOPEE	Watches sent out for **Shopee**. Taken off SHOP like TF OUT; clear it when HQ has updated.
IN	New stock that arrived

TF IN, TF OUT and IN stay until you clear them

Start New Day does **not** clear TF IN, TF OUT and IN. They stay on the sheet, like a reminder, until HQ updates.

- On the day you type it, the number changes **SHOP**.

- On the next days the number is shown in **grey**. Grey means it is already counted, so SHOP does not change again.
- When HQ has updated: type the HQ number in **TOTAL**, then **clear** the grey number. SHOP stays the same.
- If more go out on another day, type the new total in the same box (for example 1 → 3). Only the 2 new ones change SHOP.

The rule the app uses:

- BAL = TOTAL − S.OUT
- SHOP = yesterday's SHOP + TF IN − TF OUT + IN − S.OUT (TF IN / TF OUT / IN only on the day they are typed)

> **Rule:** a number only changes SHOP when you **key it in**. Numbers already on the sheet (from earlier days) are never taken off or added again.

KEEP and RP


- Type the number of watches **on keep** or **in repair**. SHOP goes down by that number; BAL stays the same.
- The number stays on the next days and is **not** taken off again.
- When the watch is back on display (keep cancelled, back from repair), **clear** the number and SHOP goes back up.
- When the customer **collects and pays**, clear KEEP and type **1 in S.OUT**. BAL goes down by 1 and SHOP stays the same, because the watch was already off the display.

The grey lines (**LEATHER STRAP, P.V.C STRAP, RENATA BATTERY, SONY BATTERY**) cannot be typed into here. They add up by themselves from the **Battery** and **Strap** tabs. Their **SHOP** is normally empty. It only shows a number (orange) while a TF IN, TF OUT or IN on that tab is waiting for HQ. Once HQ has updated (TOTAL changed and the TF / IN cleared on the tab), it is empty again.

Notes: TF IN & TF OUT & REPAIR

Scroll to the bottom of the Stock Balance page. Write each transfer or repair on its own line, with the reference number on the right. These lines are printed under the stock table.

- **+ Add a note line** adds a new line.
- The red ✕ removes a line.

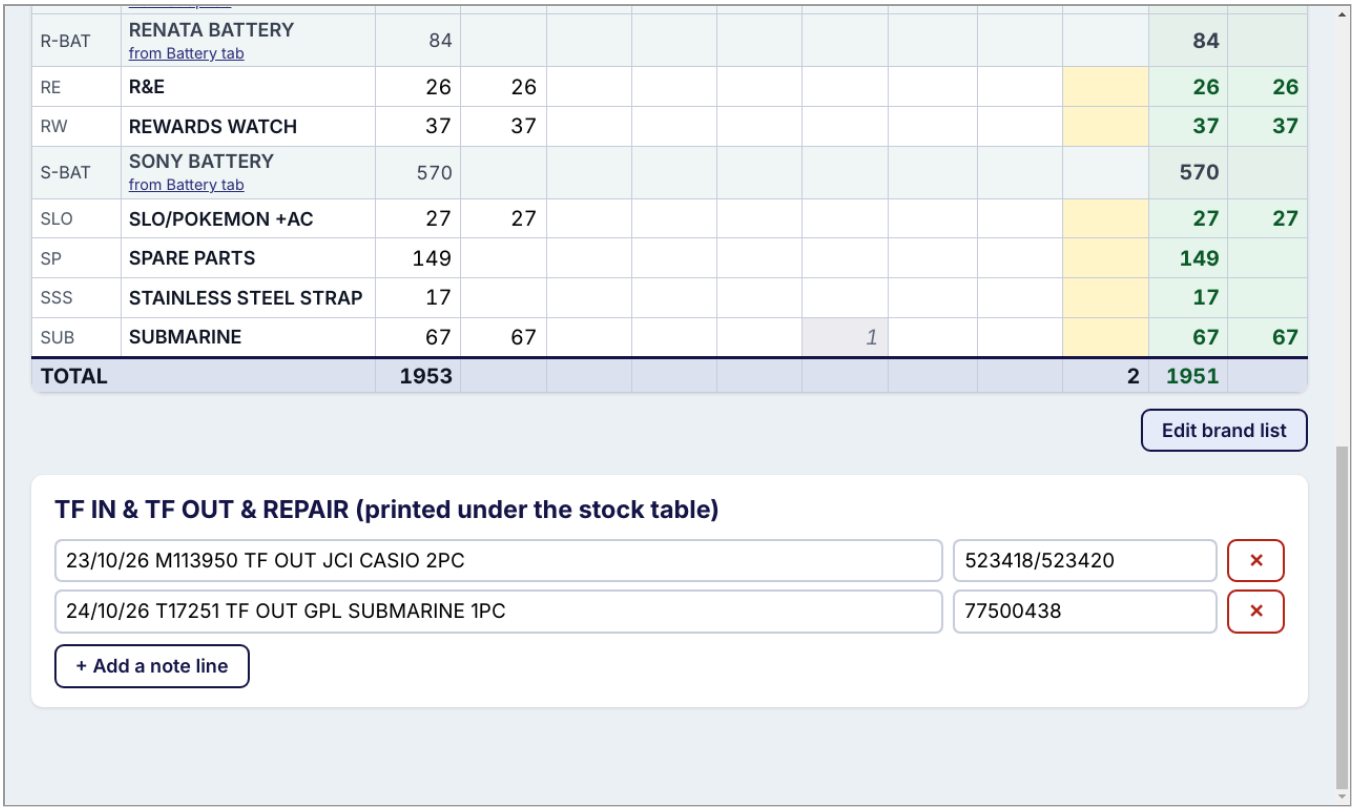

R-BAT	RENATA BATTERY from Battery tab	84								84	
RE	R&E	26	26							26	26
RW	REWARDS WATCH	37	37							37	37
S-BAT	SONY BATTERY from Battery tab	570								570	
SLO	SLO/POKEMON +AC	27	27							27	27
SP	SPARE PARTS	149								149	
SSS	STAINLESS STEEL STRAP	17								17	
SUB	SUBMARINE	67	67				1			67	67
TOTAL		1953							2	1951	

Edit brand list

TF IN & TF OUT & REPAIR (printed under the stock table)

23/10/26 M113950 TF OUT JCI CASIO 2PC | 523418/523420 | ×

24/10/26 T17251 TF OUT GPL SUBMARINE 1PC | 77500438 | ×

+ Add a note line

4. Batteries and straps: Battery and Strap tabs

1. Open the **Battery** (or **Strap**) tab.
2. Type the number sold in the **yellow OUT** column.
3. Press **Enter** to go down.

The **SHOP** column is **empty** unless that item has a number in **TF IN**, **TF OUT** or **IN**.


New stock came, but HQ has not updated yet

Example: 20 pieces of SR626 arrived, and HQ still shows 100.

1. Type **20** in the **IN** box of SR626.
2. **SHOP** becomes **120** (orange) and **BAL** stays at **100**.
3. You don't need to do anything else. On the next days, IN = 20 stays in **grey** and SHOP stays 120.
4. When HQ updates the stock, change **TOTAL** to the HQ number (**120**) and clear **IN**.

CR2016	2800006	16					16	
CR2025	2800007	10					10	
CR2032	2800008	28					28	
CR2430	2800081	6					6	
CR2450	2800133	6					6	
GP23	2800009	12					12	
GP27	2800064	19					19	
LR1130	2800011	10					10	
LR41	2800012	1					1	
LR44	2800014	6					6	
SR1130	2800085	2					2	
SR41	2800086	1					1	
SR416	2800018	4					4	
SR512	2800019	4					4	
SR516	2800020	5					5	
SR521	2800021	9					9	
SR527	2800022	10					10	
SR616	2800023	13					13	
SR621	2800024	120					120	
SR626	2800025	91			20		91	111

5. Daily sale and bank in: Bank In tab

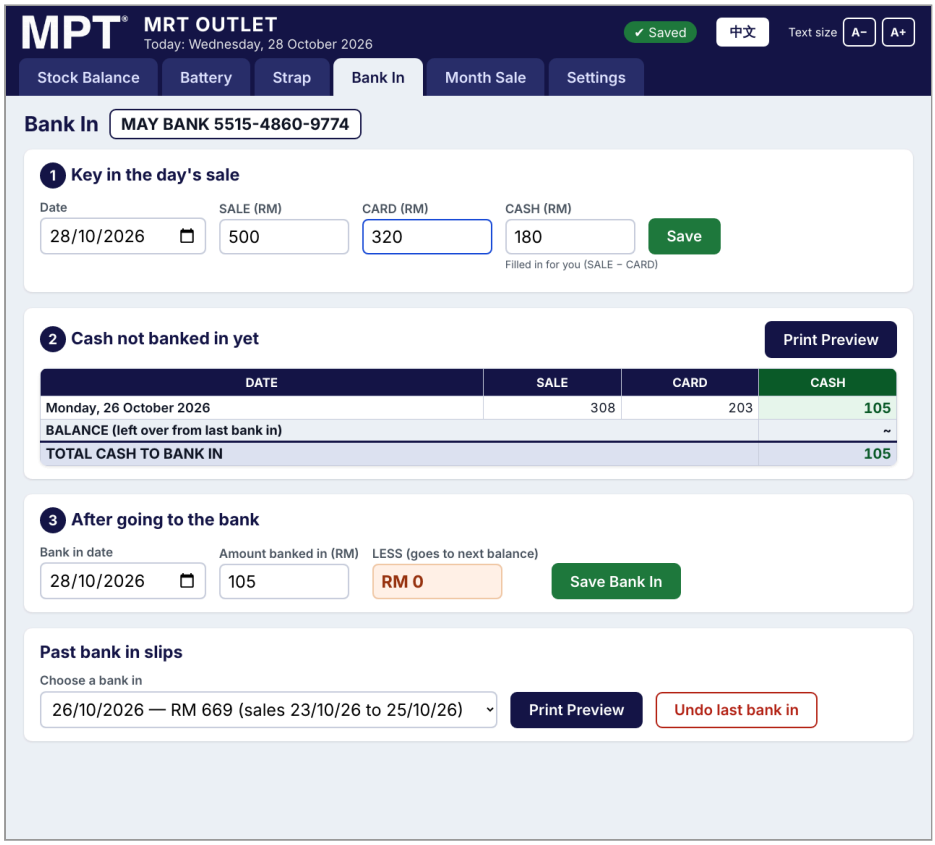

Step 1: Key in the day's sale (every day)

1. Check the **Date**.
2. Type the **SALE** amount.
3. Type the **CARD** amount.
4. **CASH** is filled in for you (SALE − CARD). You can change it if needed.
5. Press **Save**.

To fix a day you already saved, choose that date again. The numbers come back, so change them and press **Update this day**.

Step 2: Cash not banked in yet

This table shows every day since the last bank in:

- **BALANCE** is the money left over from the last bank in (the "less").
- **TOTAL CASH TO BANK IN** is all of it added together.

Press **Print Preview** if you want to print it before going to the bank.

Step 3: After going to the bank

1. Check the **Bank in date**.
2. Type the **amount you banked in**.
3. **LESS** shows what is left over, and it goes to the next balance by itself. Example: total 750, banked in 700, so LESS = 50.
4. Press **Save Bank In**, then **Yes, save**.
5. The app asks if you want to print the slip. Press **Yes, print preview**.

Old bank in slips


At the bottom of the page, choose a past bank in and press **Print Preview**. If the last bank in was wrong, press **Undo last bank in** and do Step 3 again.

6. Month Sale tab

This page **fills in by itself** from the Bank In tab. You do not need to type here.

- Use ◀ ▶ to change the month.


- Today's line has a **blue border**.
- Days that were banked in are shown in **light green**.
- You can correct any SALE, CARD, CASH, BANK IN DATE or BANK IN number. BAL and TOTAL update by themselves.
- To remove a day, clear its SALE, CARD and CASH.

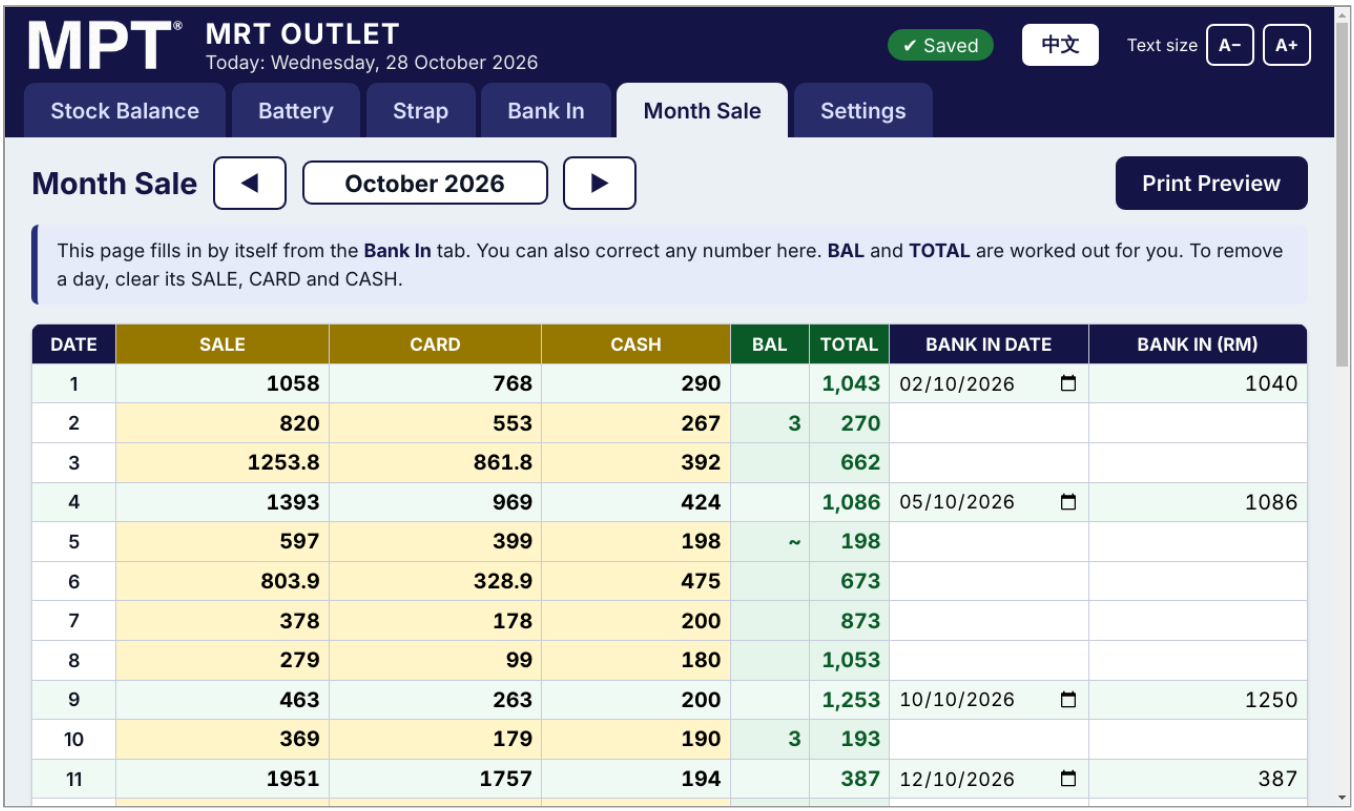

DATE	SALE	CARD	CASH	BAL	TOTAL	BANK IN DATE	BANK IN (RM)
1	1058	768	290		1,043	02/10/2026	1040
2	820	553	267	3	270		
3	1253.8	861.8	392		662		
4	1393	969	424		1,086	05/10/2026	1086
5	597	399	198	~	198		
6	803.9	328.9	475		673		
7	378	178	200		873		
8	279	99	180		1,053		
9	463	263	200		1,253	10/10/2026	1250
10	369	179	190	3	193		
11	1951	1757	194		387	12/10/2026	387

7. Printing

On any page, press **Print Preview**. You will see the paper exactly as it will be printed.

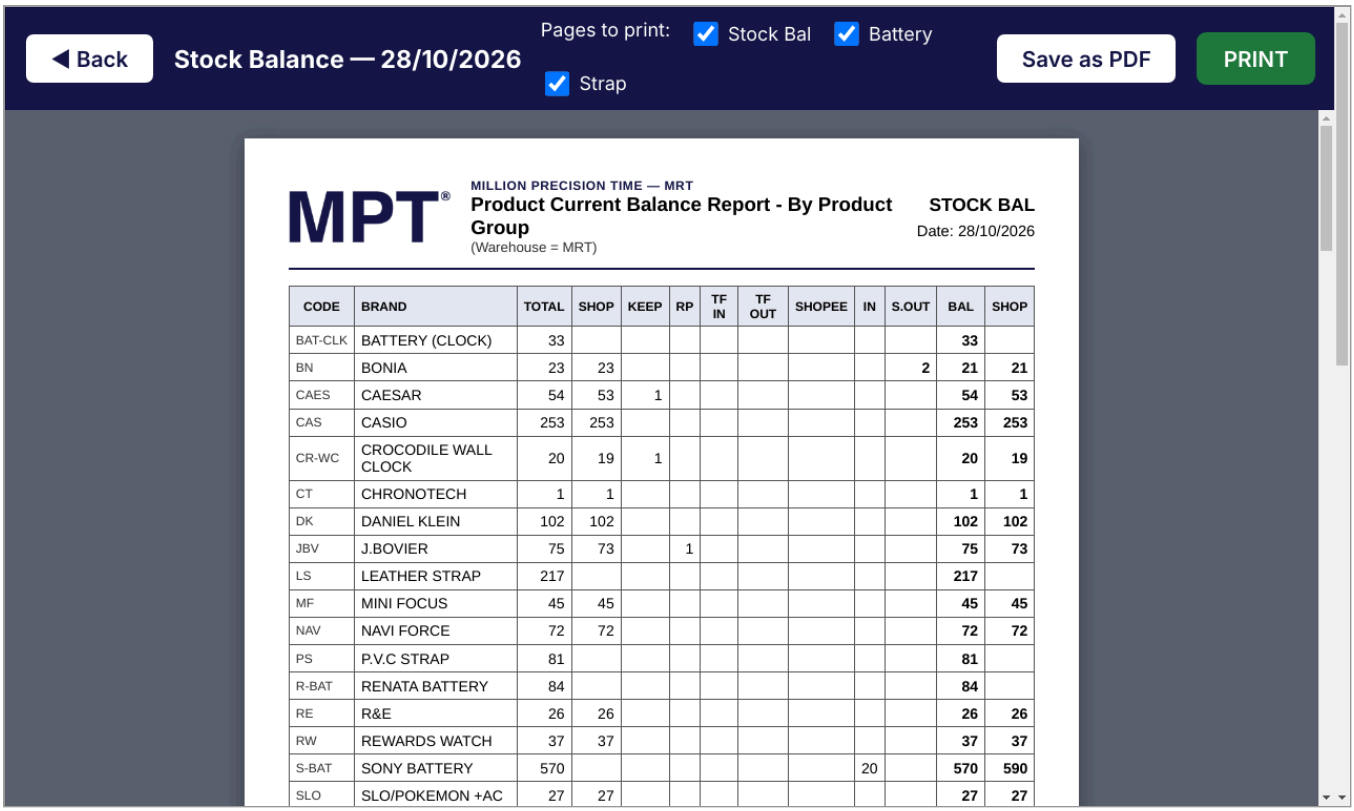

CODE	BRAND	TOTAL	SHOP	KEEP	RP	TF IN	TF OUT	SHOPEE	IN	S.OUT	BAL	SHOP
BAT-CLK	BATTERY (CLOCK)	33									33	
BN	BONIA	23	23							2	21	21
CAES	CAESAR	54	53	1							54	53
CAS	CASIO	253	253								253	253
CR-WC	CROCODILE WALL CLOCK	20	19	1							20	19
CT	CHRONOTECH	1	1								1	1
DK	DANIEL KLEIN	102	102								102	102
JBV	J.BOVIER	75	73		1						75	73
LS	LEATHER STRAP	217									217	
MF	MINI FOCUS	45	45								45	45
NAV	NAVI FORCE	72	72								72	72
PS	P.V.C STRAP	81									81	
R-BAT	RENATA BATTERY	84									84	
RE	R&E	26	26								26	26
RW	REWARDS WATCH	37	37								37	37
S-BAT	SONY BATTERY	570							20		570	590
SLO	SLO/POKEMON +AC	27	27								27	27

- **PRINT** (green) sends it to the printer. Choose the printer, then press Print.
- **Save as PDF** saves a file (on the Desktop, unless you choose another place).
- ◀ **Back** (or the Esc key) goes back without printing.
- For the stock report, tick or untick **Stock Bal / Battery / Strap** to choose which pages to print.

Report	Where
Stock balance (3 pages)	Stock Balance, Battery or Strap tab
Bank in slip	Bank In tab
Month sale	Month Sale tab
Old stock report	Settings → Old stock reports


Shortcut: **Ctrl + P** on the stock pages opens the print preview.

8. Adding, renaming or removing brands and items

Brands (Stock Balance tab)

1. Press **Edit brand list** (under the table).

2. You can now:
3. press **+ Add a brand**, then type the code, name and quantity now;
4. type a new **code** or **name** straight into the box;
5. press ▲ ▼ to move a line up or down (this is also the order on paper);
6. press the red ✕ to remove a brand (the app asks first).
7. Press **Finish editing brand list**.

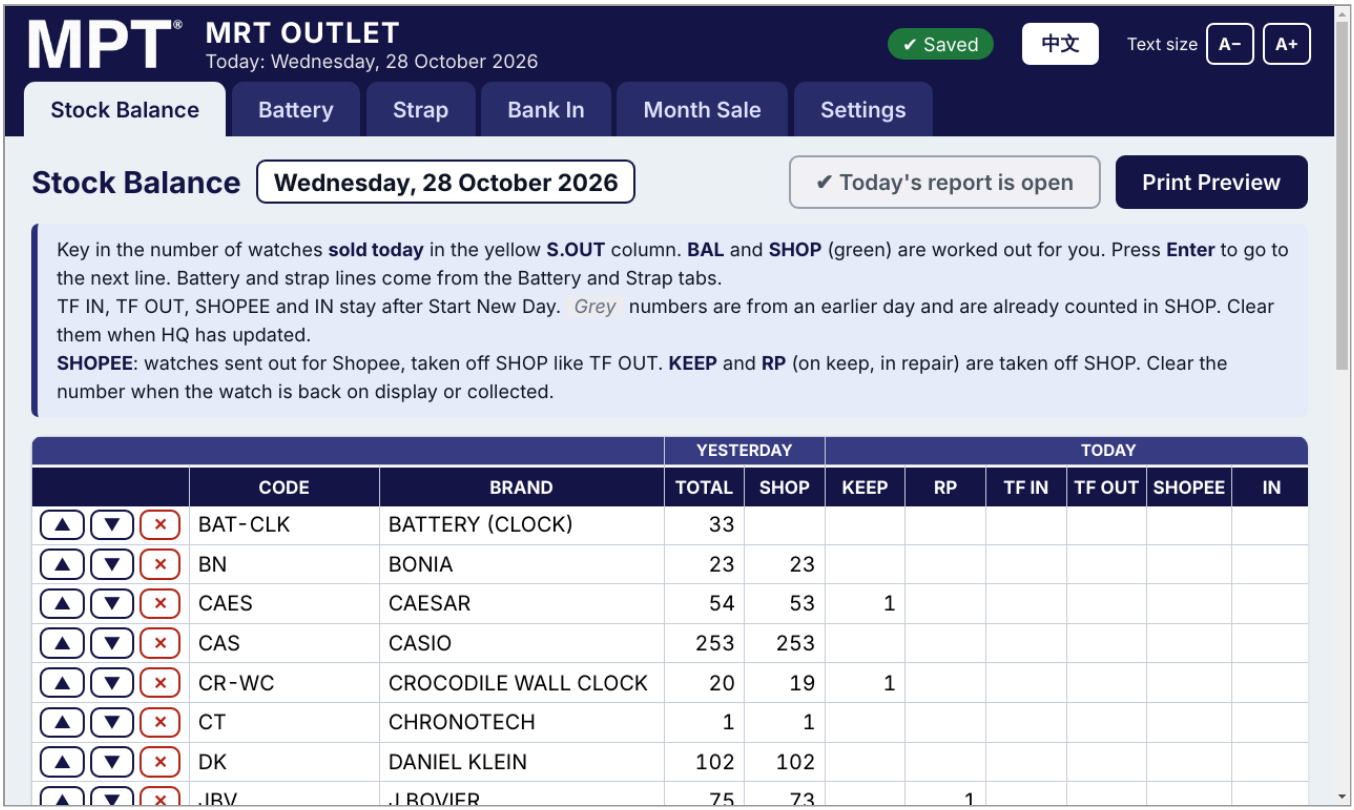


Batteries and straps (Battery / Strap tab)

Press **Edit list (add / remove items)**. You can add, rename, move or remove items, and add a whole new group (for example a new battery brand). A new group also appears as one line on the Stock Balance sheet.

> Removing a brand only affects today and later days. Old reports still show it.

9. Settings tab

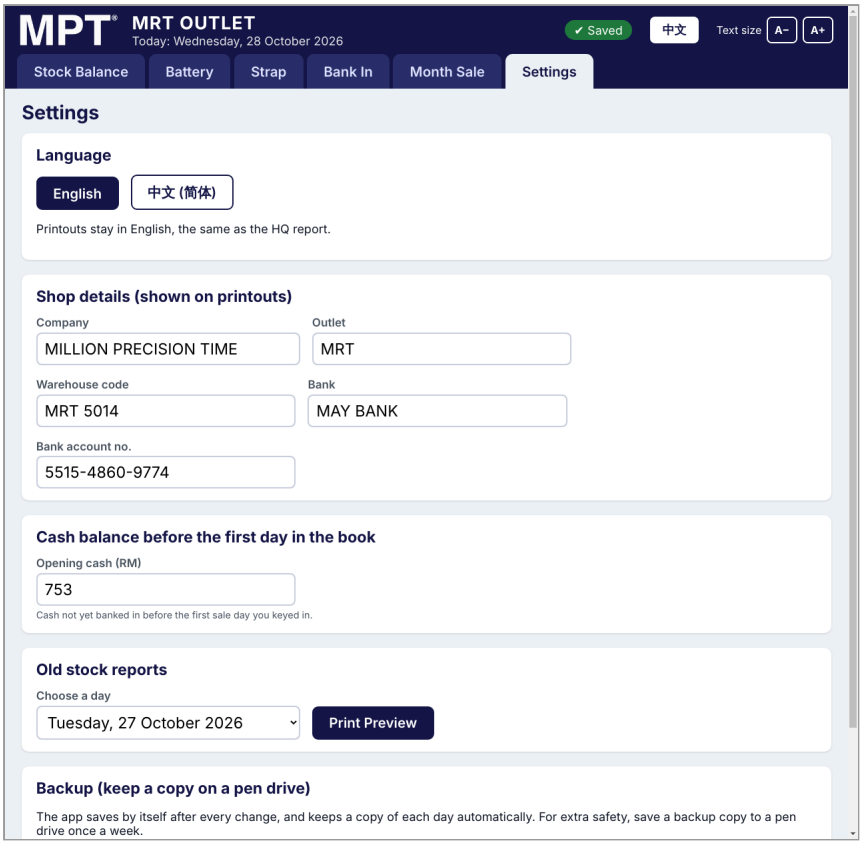

- **Language**: English or 中文 (简体). The same as the button at the top.
- **Shop details**: company, outlet, bank name and account number, as printed on the reports.
- **Opening cash**: the cash balance before the first day in the book. Set this once only.
- **Old stock reports**: choose a day and press **Print Preview**.
- **Backup**:
- **Save a backup copy…**: put a pen drive in and save the file there **once a week**.
- **Restore from a backup…**: only if the computer was changed or the data is lost.
- **Open data folder**: shows where the app keeps its file.

The app also keeps a copy **every day by itself** (the last 120 days).

10. Problems and answers

Problem	What to do
A box turned **red**	You typed something that is not a number. Delete it and type the number again.
BAL or SHOP looks wrong	Check TOTAL, S.OUT, TF IN, TF OUT and IN on that line. Did you press Start New Day today?
A grey number is still there	It is from an earlier day. Clear it once HQ has updated; SHOP will not change.
I pressed Start New Day twice	Nothing happens the second time, so there's nothing to fix.
I keyed in a wrong number	Click the box and type the right number. BAL and SHOP update straight away.
The report date is later than today	The computer's date was wrong. Fix the Windows date, then press **Start New Day**.
I saved the wrong bank in	Bank In tab → **Undo last bank in**, then save it again.
A day's sale is wrong	Bank In tab, choose the date, fix it, then **Update this day**. Or fix it in Month Sale.
The writing is too small	Press **A+** at the top right.
I want Chinese / English	Press **中文** (or **English**) at the top right.
The printer did not print	Check the printer is on and has paper, then press **PRINT** again. Or use **Save as PDF** and print the file.
NOT SAVED! in red	Do not close the app. Call for help.
The computer broke	Install MRT Daily on the new computer, then Settings → **Restore from a backup…** and choose the file on the pen drive.