MRT Daily

User Guide

MPT — Million Precision Time · MRT outlet

For the manager of the **MPT MRT outlet**. This app replaces the Excel files for **Stock Balance**, **Bank In** and **Month Sale**.

You do not need the internet. The app **saves by itself**, so there is no Save button for the stock.

1. Opening the app

Double-click the **MRT Daily** icon on the desktop.

At the top of the screen you will see:

- **Today's date**, under "MRT OUTLET".
- ✔ **Saved** (green), which means everything is safe. If it shows **NOT SAVED!** in red, call for help.
- **A− / A+**, to make the writing smaller or bigger.

Below that are the **tabs**. Click a tab to open that page:

Tab	What it is for
Stock Balance	Watches sold today (S.OUT)
Battery	Batteries sold today
Strap	Straps sold today
Bank In	The day's sale, and money banked in
Month Sale	The whole month in one table
Settings	Shop details, old reports, backups


Colours used on every page

Colour	Meaning
Yellow column	Where you type every day
White box	You can type here when needed
Green number	Worked out by the app, so you cannot type here
Orange number	SHOP is different from BAL (stock waiting for HQ)
Red box	Not a number, so check what you typed

2. Every morning: Start New Day

Do this **once every morning**, before keying in anything.

1. Open the **Stock Balance** tab.
2. Press the green **Start New Day** button.
3. Check that the date is **today**.
4. Press **Yes, start new day**.

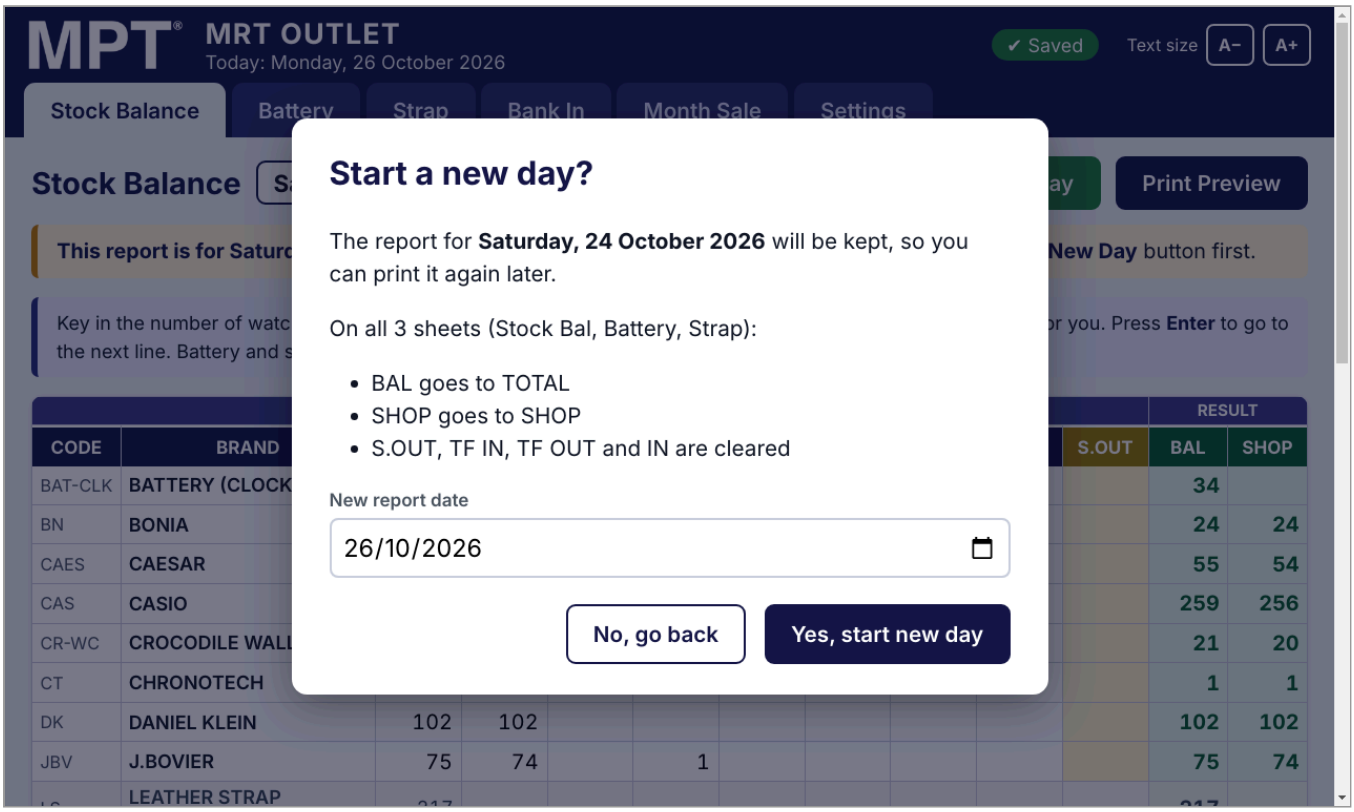

The app now does what you used to do by copy and paste, on all 3 sheets (Stock Bal, Battery, Strap):

- BAL goes to TOTAL
- SHOP goes to SHOP
- S.OUT, TF IN, TF OUT and IN are cleared


Yesterday's report is kept, so you can print it again later (see section 8).

> If you forget, a **yellow note** at the top reminds you that the report is for an earlier day.
>
> If you press it by mistake, go to **Settings → Undo last "Start New Day"**.

3. Watches sold: Stock Balance tab

1. Find the brand.
2. Click the **yellow S.OUT** box on that line.
3. Type the **number of watches sold** (the quantity, not the price).
4. Press **Enter** to go down to the next brand.

BAL and **SHOP** (green) change straight away, and so does the **TOTAL** line at the bottom.

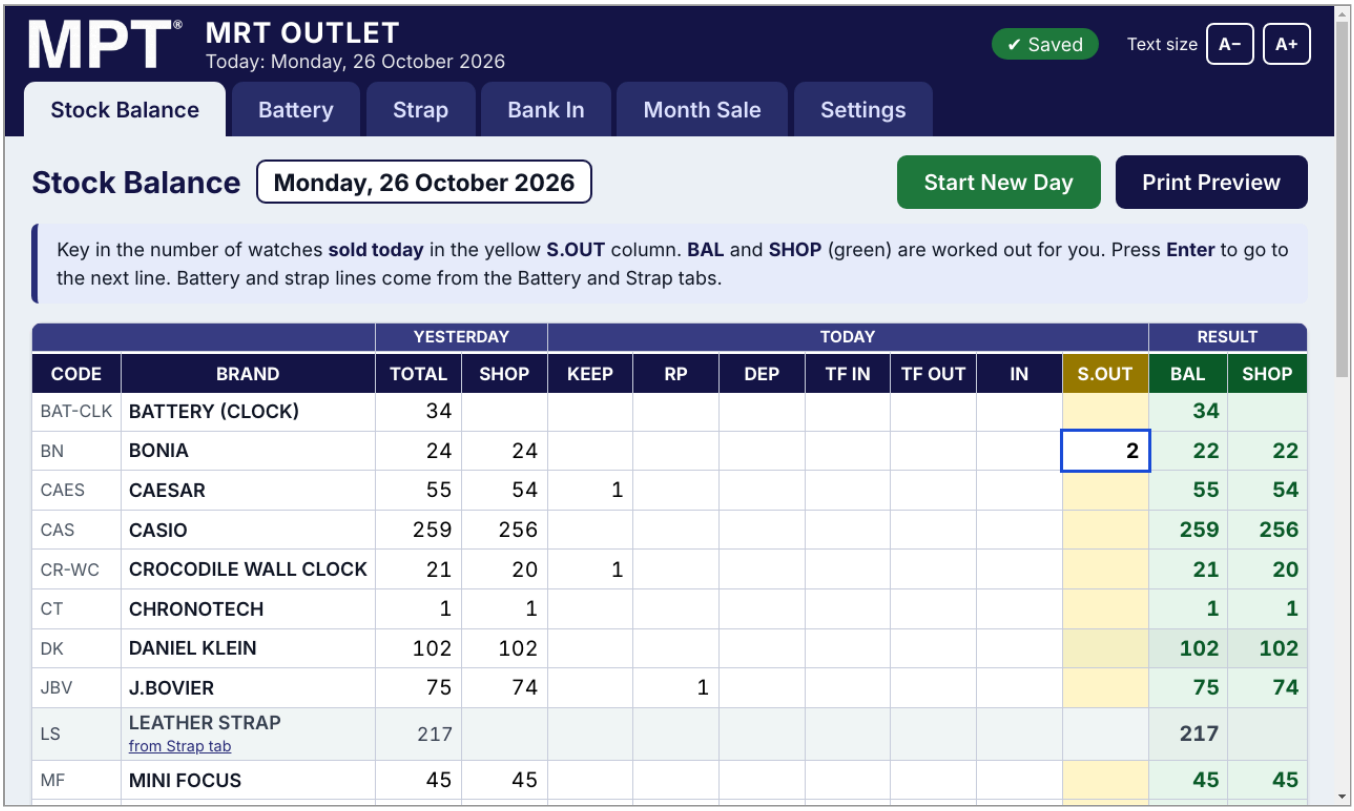

		YESTERDAY		TODAY							RESULT	
CODE	BRAND	TOTAL	SHOP	KEEP	RP	DEP	TF IN	TF OUT	IN	S.OUT	BAL	SHOP
BAT-CLK	BATTERY (CLOCK)	34									34	
BN	BONIA	24	24							2	22	22
CAES	CAESAR	55	54	1							55	54
CAS	CASIO	259	256								259	256
CR-WC	CROCODILE WALL CLOCK	21	20	1							21	20
CT	CHRONOTECH	1	1								1	1
DK	DANIEL KLEIN	102	102								102	102
JBV	J.BOVIER	75	74		1						75	74
LS	LEATHER STRAP from Strap tab	217									217	
MF	MINI FOCUS	45	45								45	45

The other columns

Column	What to type
TOTAL / SHOP (yesterday)	Filled in by Start New Day. Change only when HQ gives a new number.
KEEP / RP / DEP	Watches on keep, in repair, on deposit. They stay from day to day.
TF IN	Watches transferred **in** from another outlet
TF OUT	Watches transferred **out** to another outlet

Column	What to type
IN	New stock that arrived

The rule the app uses:


- BAL = TOTAL − S.OUT
- SHOP = yesterday's SHOP + TF IN − TF OUT + IN − S.OUT

The grey lines (**LEATHER STRAP, P.V.C STRAP, RENATA BATTERY, SONY BATTERY**) cannot be typed into here. They add up by themselves from the **Battery** and **Strap** tabs.

Notes: TF IN & TF OUT & REPAIR

Scroll to the bottom of the Stock Balance page. Write each transfer or repair on its own line, with the reference number on the right. These lines are printed under the stock table.

- **+ Add a note line** adds a new line.
- The red ✕ removes a line.

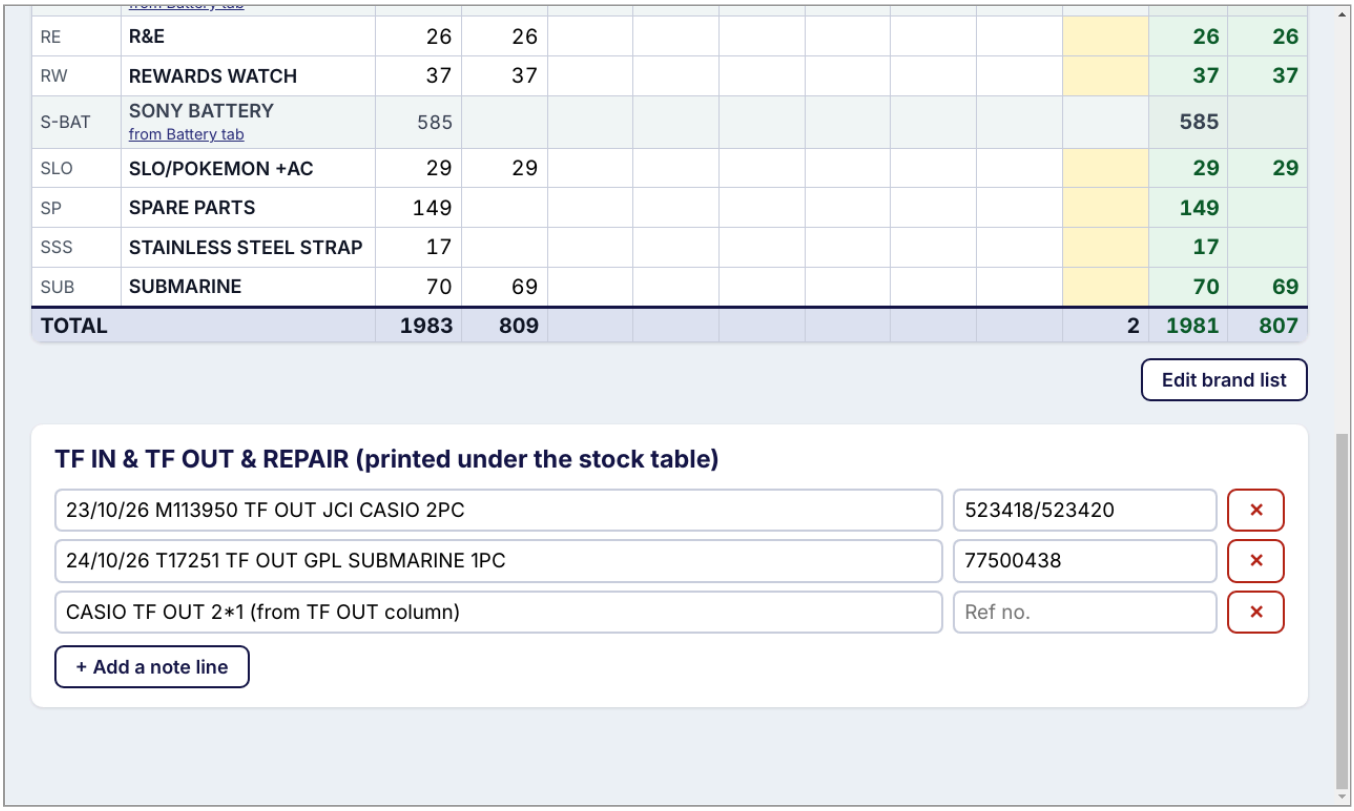


4. Batteries and straps: Battery and Strap tabs

1. Open the **Battery** (or **Strap**) tab.
2. Type the number sold in the **yellow OUT** column.
3. Press **Enter** to go down.

New stock came, but HQ has not updated yet


Example: 20 pieces of SR626 arrived, and HQ still shows 100.

1. Type **20** in the **IN** box of SR626.
2. **SHOP** becomes **120** (orange) and **BAL** stays at **100**.
3. You don't need to do anything else. The app remembers SHOP = 120 on the next days.
4. When HQ updates the stock, change **TOTAL** to the HQ number (**120**).

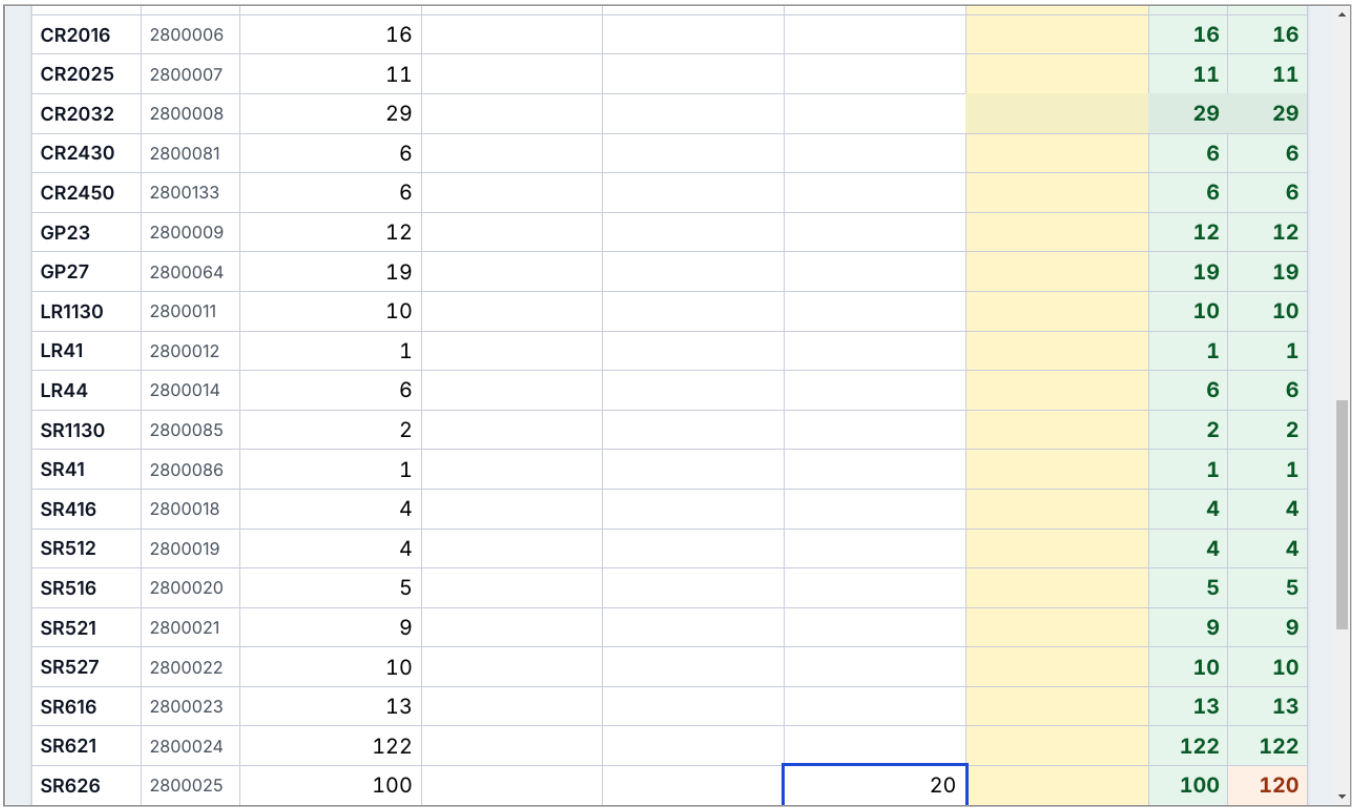

CR2016	2800006	16					16	16
CR2025	2800007	11					11	11
CR2032	2800008	29					29	29
CR2430	2800081	6					6	6
CR2450	2800133	6					6	6
GP23	2800009	12					12	12
GP27	2800064	19					19	19
LR1130	2800011	10					10	10
LR41	2800012	1					1	1
LR44	2800014	6					6	6
SR1130	2800085	2					2	2
SR41	2800086	1					1	1
SR416	2800018	4					4	4
SR512	2800019	4					4	4
SR516	2800020	5					5	5
SR521	2800021	9					9	9
SR527	2800022	10					10	10
SR616	2800023	13					13	13
SR621	2800024	122					122	122
SR626	2800025	100			20		100	120

5. Daily sale and bank in: Bank In tab

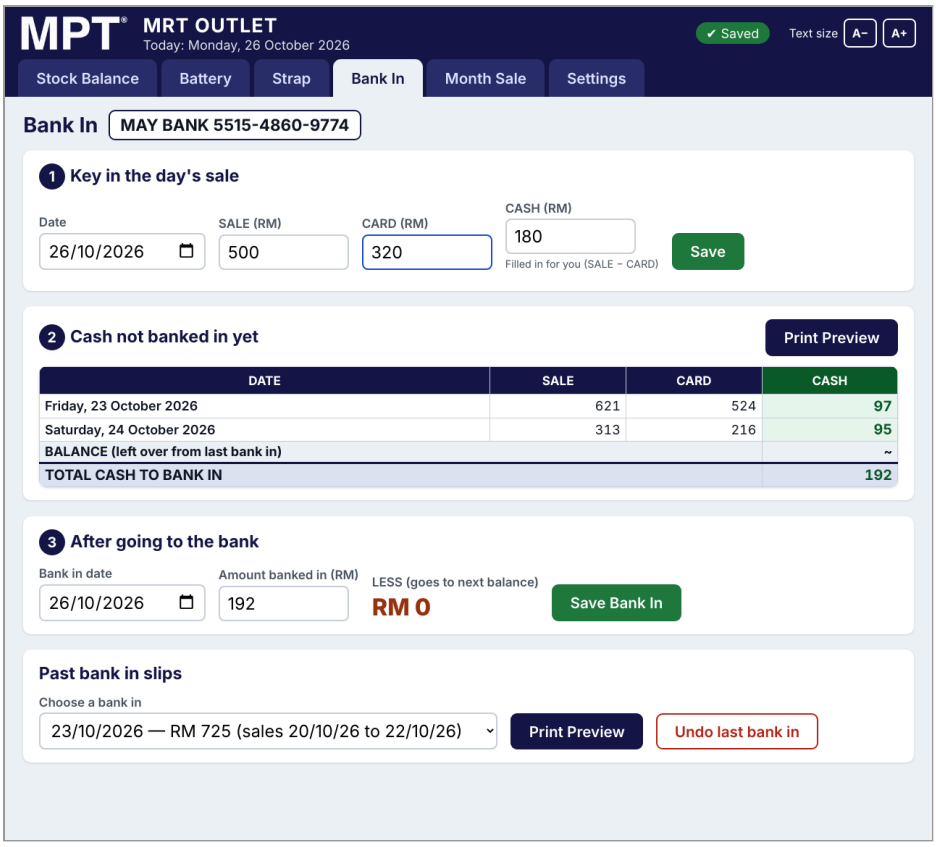

Step 1: Key in the day's sale (every day)

1. Check the **Date**.
2. Type the **SALE** amount.
3. Type the **CARD** amount.
4. **CASH** is filled in for you (SALE − CARD). You can change it if needed.
5. Press **Save**.

To fix a day you already saved, choose that date again. The numbers come back, so change them and press **Update this day**.

Step 2: Cash not banked in yet

This table shows every day since the last bank in:

- **BALANCE** is the money left over from the last bank in (the "less").
- **TOTAL CASH TO BANK IN** is all of it added together.

Press **Print Preview** if you want to print it before going to the bank.

Step 3: After going to the bank

1. Check the **Bank in date**.
2. Type the **amount you banked in**.
3. **LESS** shows what is left over, and it goes to the next balance by itself. Example: total 750, banked in 700, so LESS = 50.
4. Press **Save Bank In**, then **Yes, save**.
5. The app asks if you want to print the slip. Press **Yes, print preview**.


Old bank in slips

At the bottom of the page, choose a past bank in and press **Print Preview**. If the last bank in was wrong, press **Undo last bank in** and do Step 3 again.

6. Month Sale tab

This page **fills in by itself** from the Bank In tab. You do not need to type here.


- Use ◀ ▶ to change the month.
- Today's line has a **blue border**.
- Days that were banked in are shown in **light green**.
- You can correct any SALE, CARD, CASH, BANK IN DATE or BANK IN number. BAL and TOTAL update by themselves.
- To remove a day, clear its SALE, CARD and CASH.

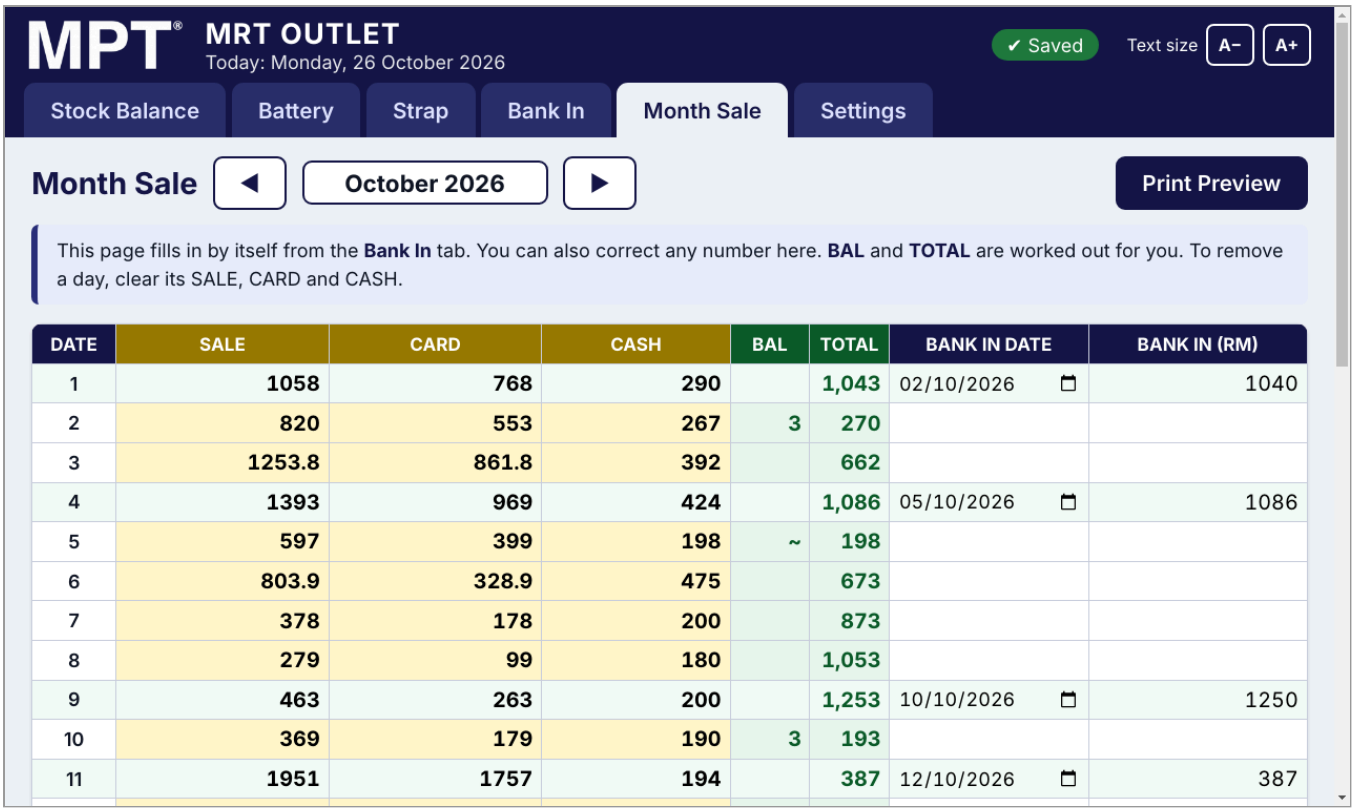

DATE	SALE	CARD	CASH	BAL	TOTAL	BANK IN DATE	BANK IN (RM)
1	1058	768	290		1,043	02/10/2026	1040
2	820	553	267	3	270		
3	1253.8	861.8	392		662		
4	1393	969	424		1,086	05/10/2026	1086
5	597	399	198	~	198		
6	803.9	328.9	475		673		
7	378	178	200		873		
8	279	99	180		1,053		
9	463	263	200		1,253	10/10/2026	1250
10	369	179	190	3	193		
11	1951	1757	194		387	12/10/2026	387

7. Printing

On any page, press **Print Preview**. You will see the paper exactly as it will be printed.

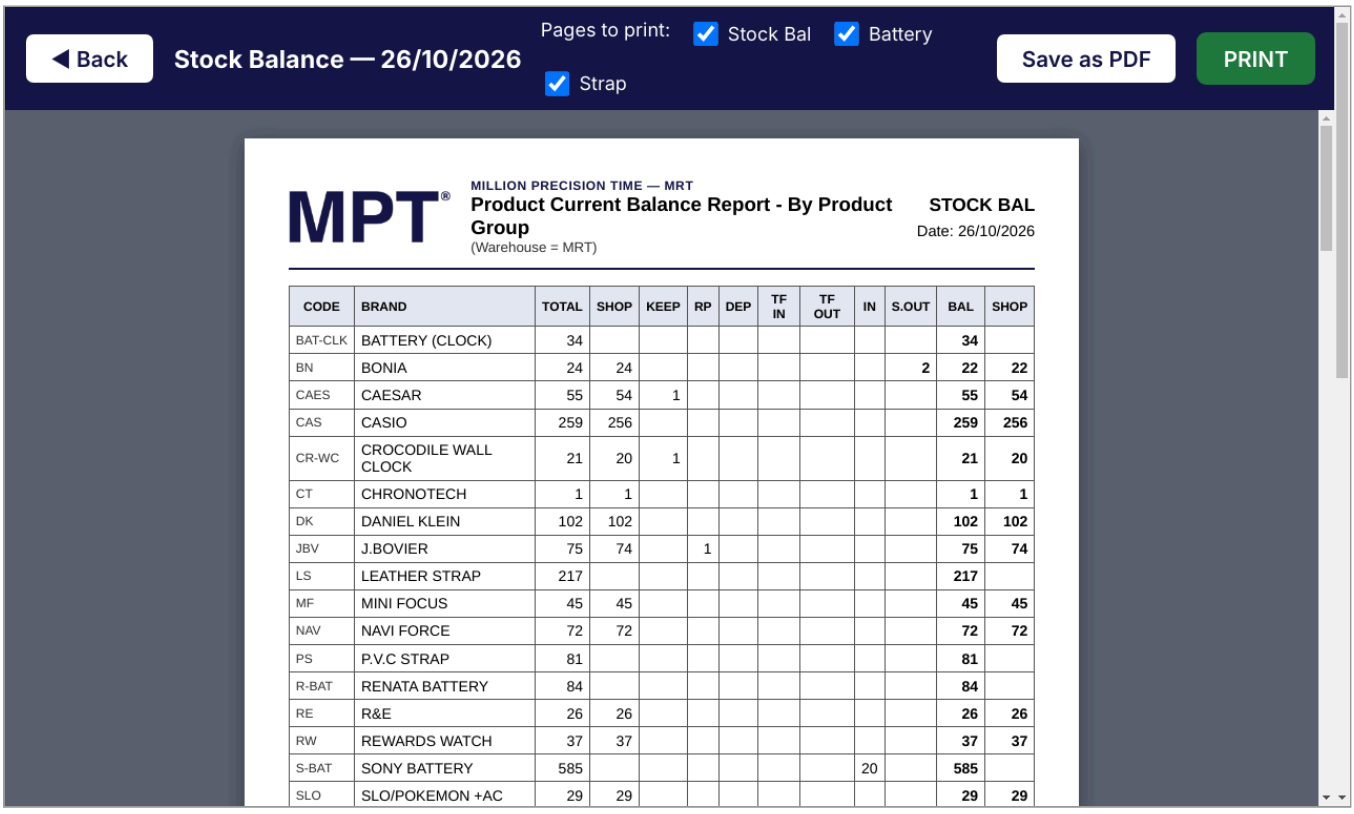

CODE	BRAND	TOTAL	SHOP	KEEP	RP	DEP	TF IN	TF OUT	IN	S.OUT	BAL	SHOP
BAT-CLK	BATTERY (CLOCK)	34									34	
BN	BONIA	24	24							2	22	22
CAES	CAESAR	55	54	1							55	54
CAS	CASIO	259	256								259	256
CR-WC	CROCODILE WALL CLOCK	21	20	1							21	20
CT	CHRONOTECH	1	1								1	1
DK	DANIEL KLEIN	102	102								102	102
JBV	J.BOVIER	75	74		1						75	74
LS	LEATHER STRAP	217									217	
MF	MINI FOCUS	45	45								45	45
NAV	NAVI FORCE	72	72								72	72
PS	P.V.C STRAP	81									81	
R-BAT	RENATA BATTERY	84									84	
RE	R&E	26	26								26	26
RW	REWARDS WATCH	37	37								37	37
S-BAT	SONY BATTERY	585							20		585	
SLO	SLO/POKEMON +AC	29	29								29	29

- **PRINT** (green) sends it to the printer. Choose the printer, then press Print.

- **Save as PDF** saves a file (on the Desktop, unless you choose another place).
- ◀ **Back** (or the Esc key) goes back without printing.
- For the stock report, tick or untick **Stock Bal / Battery / Strap** to choose which pages to print.


Report	Where
Stock balance (3 pages)	Stock Balance, Battery or Strap tab
Bank in slip	Bank In tab
Month sale	Month Sale tab
Old stock report	Settings → Old stock reports

Shortcut: **Ctrl + P** on the stock pages opens the print preview.

8. Adding, renaming or removing brands and items

Brands (Stock Balance tab)

1. Press **Edit brand list** (under the table).
2. You can now:
3. press **+ Add a brand**, then type the code, name and quantity now;
4. type a new **code** or **name** straight into the box;
5. press ▲ ▼ to move a line up or down (this is also the order on paper);
6. press the red ✕ to remove a brand (the app asks first).
7. Press **Finish editing brand list**.

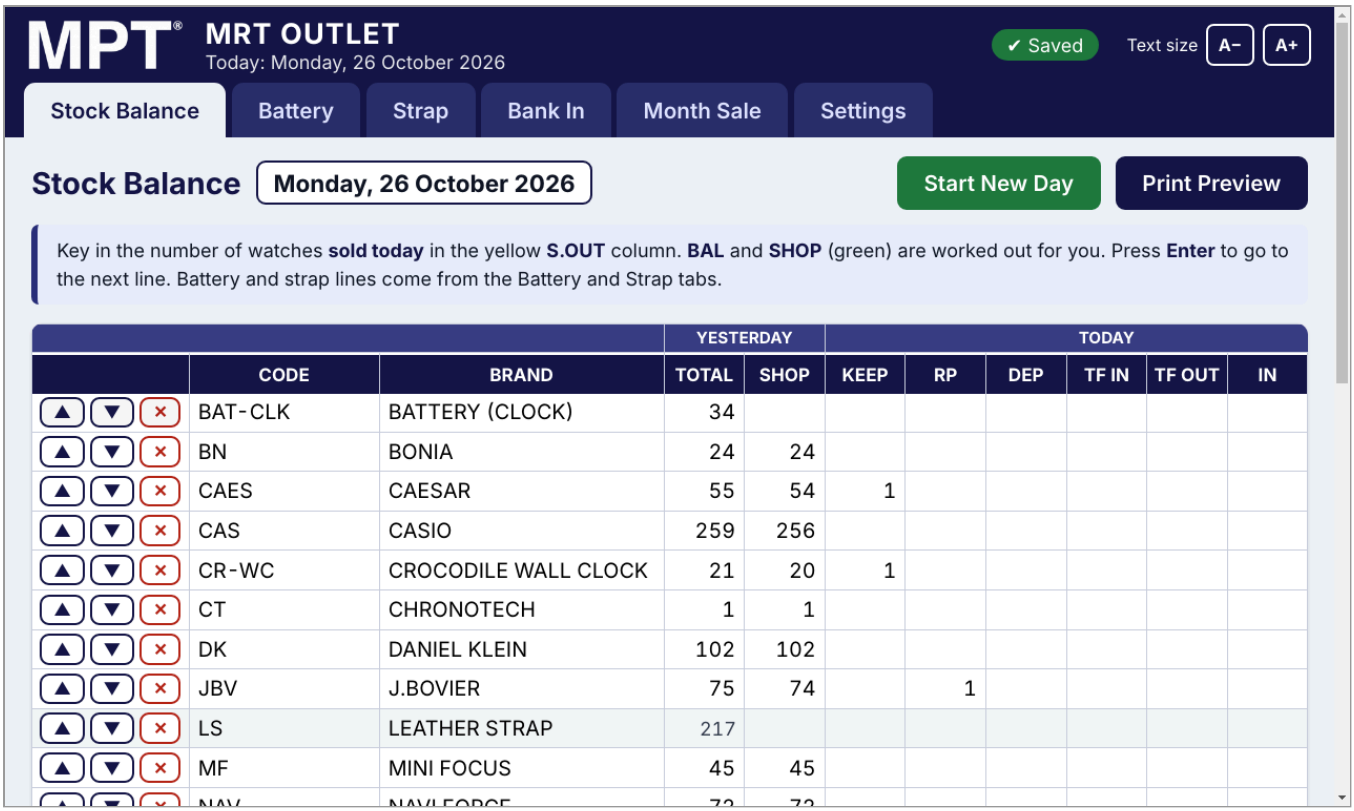


Batteries and straps (Battery / Strap tab)

Press **Edit list (add / remove items)**. You can add, rename, move or remove items, and add a whole new group (for example a new battery brand). A new group also appears as one line on the Stock Balance sheet.

> Removing a brand only affects today and later days. Old reports still show it.

9. Settings tab

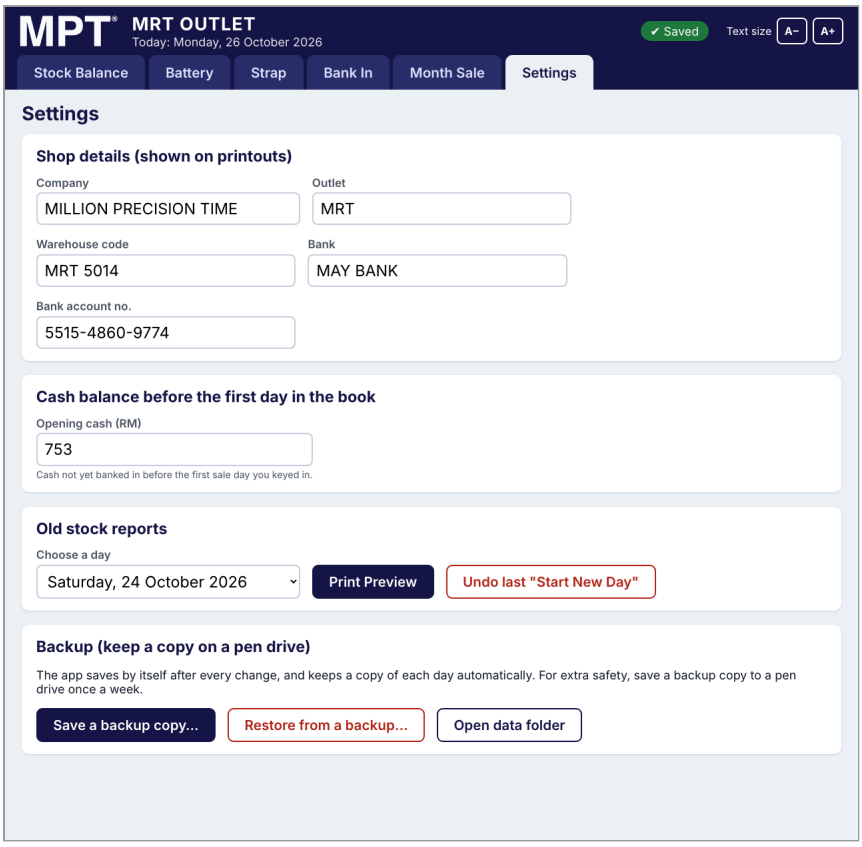

- **Shop details**: company, outlet, bank name and account number, as printed on the reports.
- **Opening cash**: the cash balance before the first day in the book. Set this once only.
- **Old stock reports**: choose a day and press **Print Preview**.
- **Undo last "Start New Day"**: only for mistakes. Anything typed on the current day is lost.
- **Backup**:
- **Save a backup copy…**: put a pen drive in and save the file there **once a week**.
- **Restore from a backup…**: only if the computer was changed or the data is lost.
- **Open data folder**: shows where the app keeps its file.

The app also keeps a copy **every day by itself** (the last 120 days).

10. Problems and answers

Problem	What to do
A box turned **red**	You typed something that is not a number. Delete it and type the number again.
BAL or SHOP looks wrong	Check TOTAL, S.OUT, TF IN, TF OUT and IN on that line. Did you press Start New Day today?
I pressed Start New Day twice	Settings → **Undo last "Start New Day"**.
I saved the wrong bank in	Bank In tab → **Undo last bank in**, then save it again.
A day's sale is wrong	Bank In tab, choose the date, fix it, then **Update this day**. Or fix it in Month Sale.
The writing is too small	Press **A+** at the top right.
The printer did not print	Check the printer is on and has paper, then press **PRINT** again. Or use **Save as PDF** and print the file.
NOT SAVED! in red	Do not close the app. Call for help.
The computer broke	Install MRT Daily on the new computer, then Settings → **Restore from a backup…** and choose the file on the pen drive.