


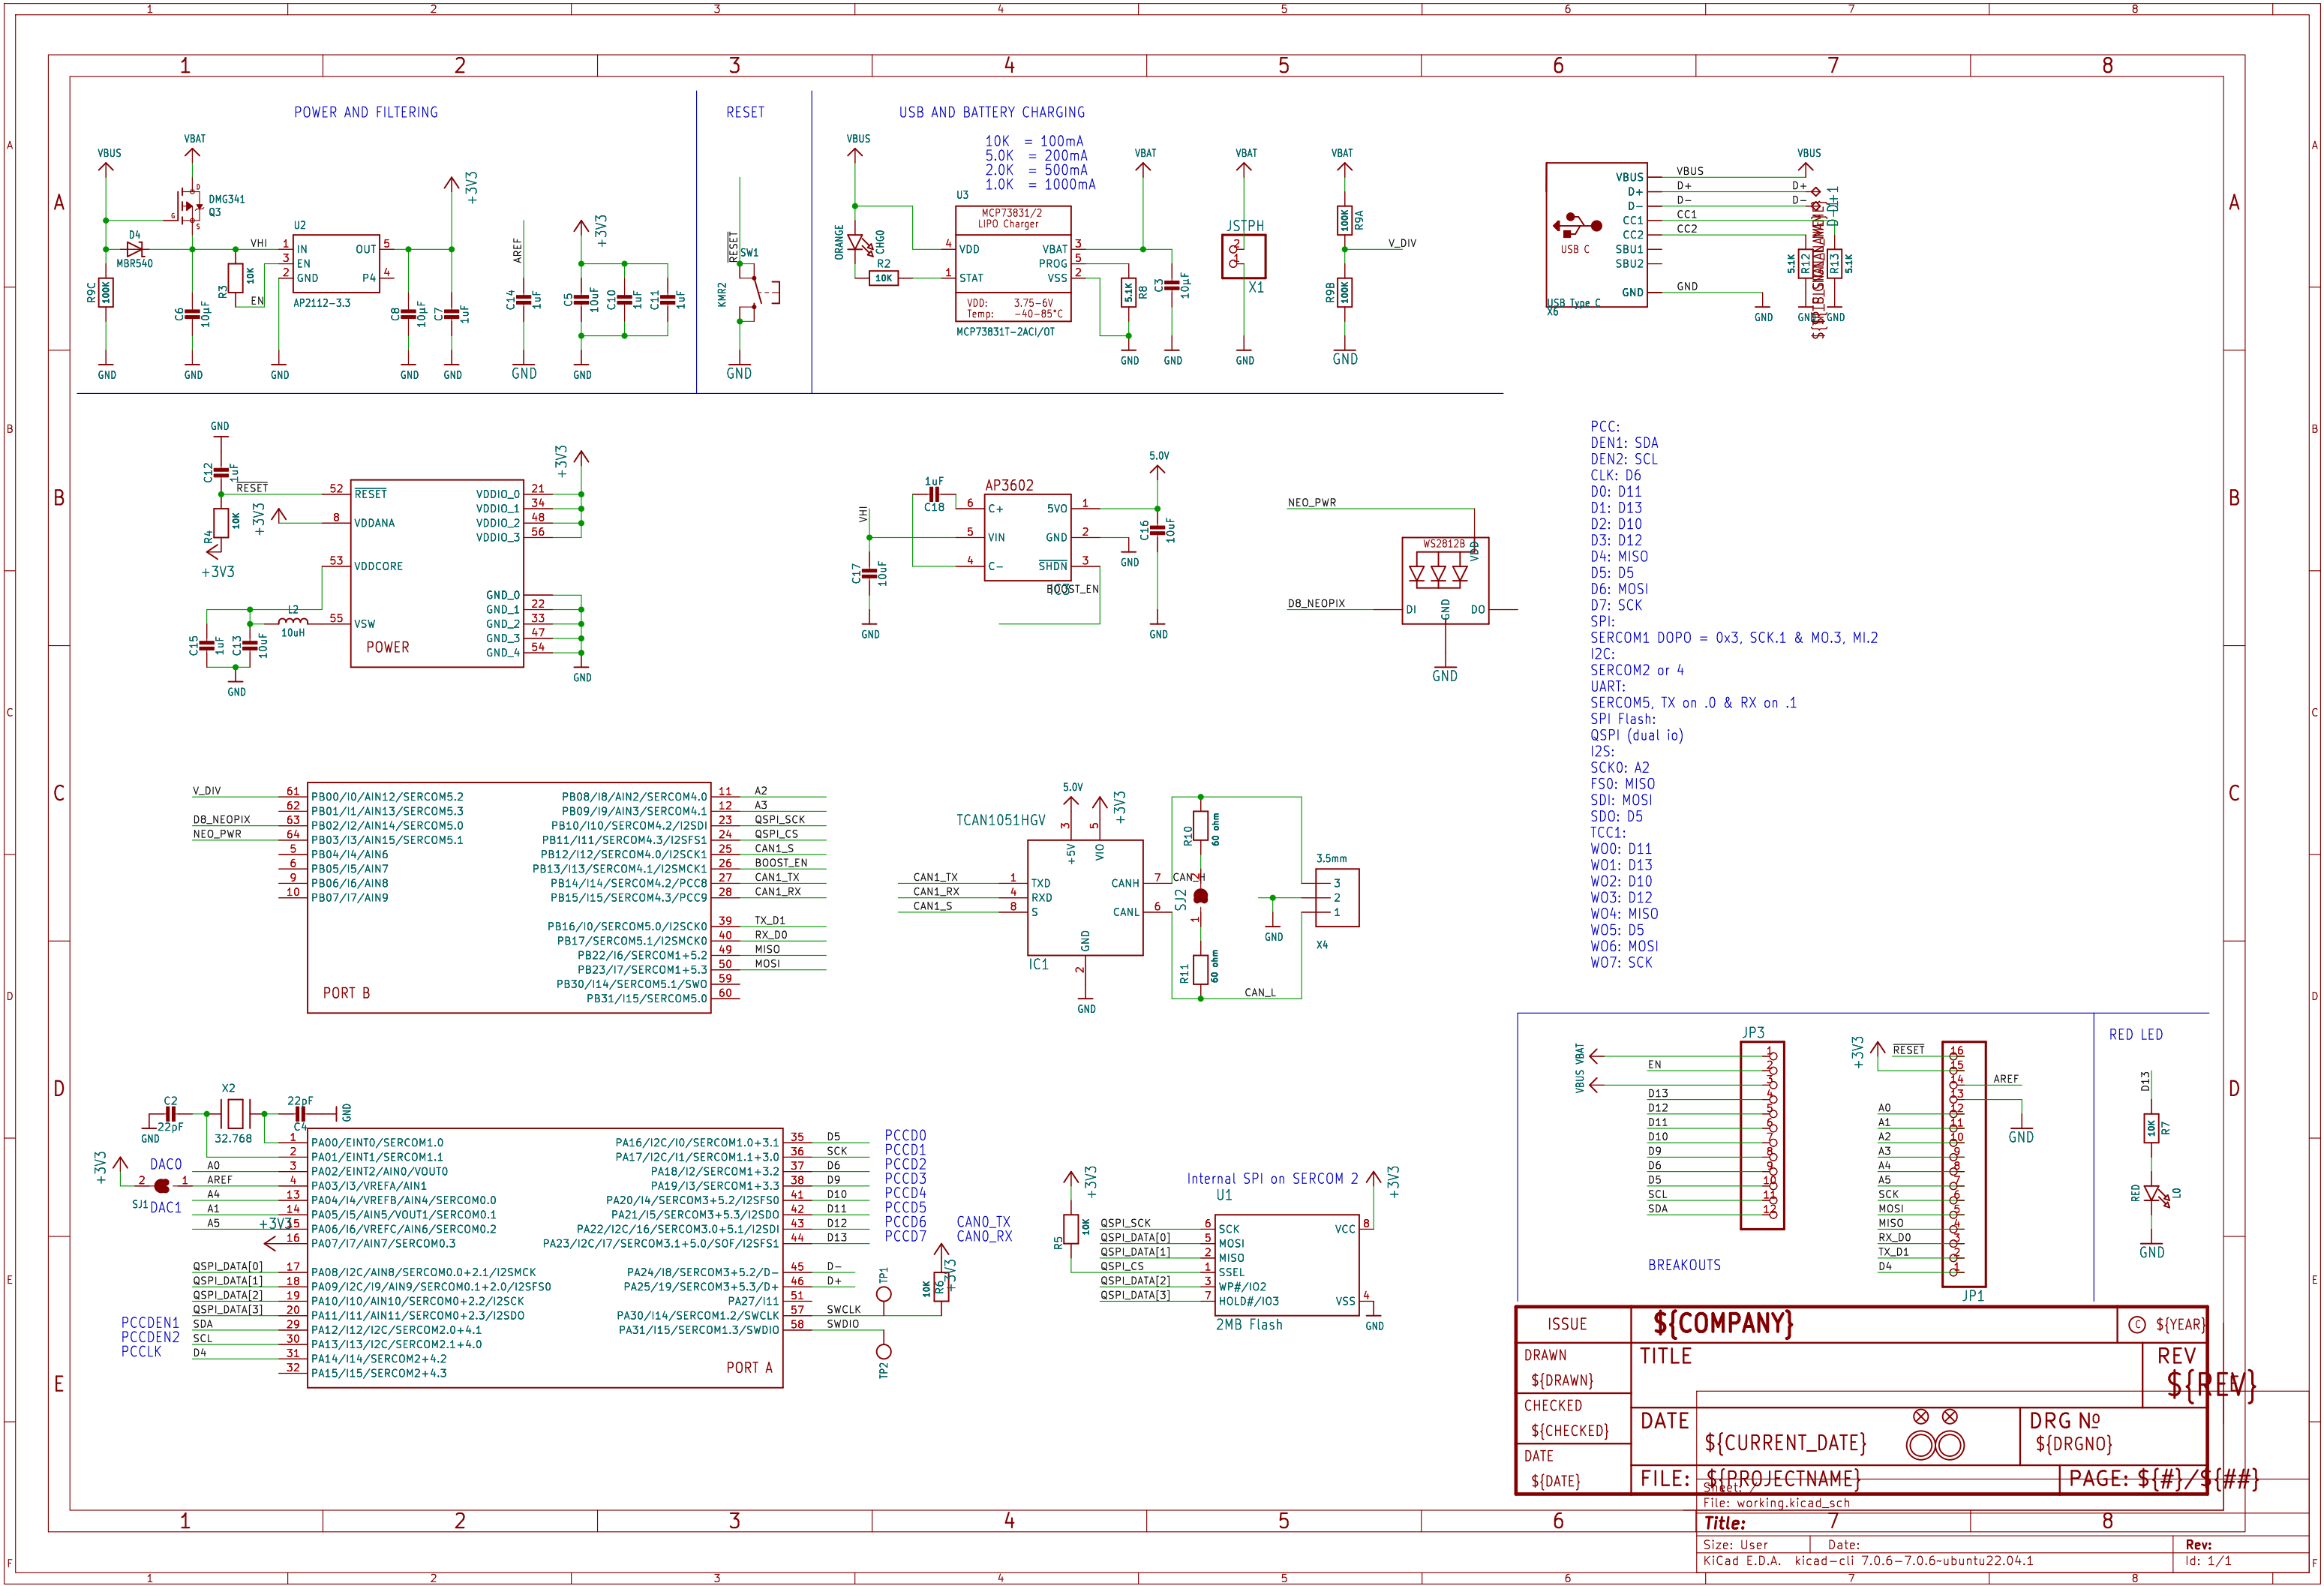

PCC:
DEN1: SDA
DEN2: SCL
CLK: D6
D0: D11
D1: D13
D2: D10
D3: D12
D4: MISO
D5: D5
D6: MOSI
D7: SCK
SPI:
SERCOM1 DOPO = 0x3, SCK.1 & MO.3, MI.2
I2C:
SERCOM2 or 4
UART:
SERCOM5, TX on .0 & RX on .1
SPI Flash:
QSPI (dual io)
I2S:
SCK0: A2
FS0: MISO
SDI: MOSI
SD0: D5
TCC1:
W00: D11
W01: D13
W02: D10
W03: D12
W04: MISO
W05: D5
W06: MOSI
W07: SCK

V_DIV	61	PB00/I0/AIN12/SERCOM5.2	PB08/I8/AIN2/SERCOM4.0	11	A2
DB_NEOPIX	62	PB01/I1/AIN13/SERCOM5.3	PB09/I9/AIN3/SERCOM4.1	12	A3
NEO_PWR	63	PB02/I2/AIN14/SERCOM5.0	PB10/I10/SERCOM4.2/I2SDI	23	QSPL_SCK
	64	PB03/I3/AIN15/SERCOM5.1	PB11/I11/SERCOM4.3/I2SFS1	24	QSPL_CS
	5	PB04/I4/AIN6	PB12/I12/SERCOM4.0/I2SCK1	25	CAN1_S
	6	PB05/I5/AIN7	PB13/I13/SERCOM4.1/I2SMCK1	26	BOOST_EN
	9	PB06/I6/AIN8	PB14/I14/SERCOM4.2/PCC8	27	CAN1_TX
	10	PB07/I7/AIN9	PB15/I15/SERCOM4.3/PCC9	28	CAN1_RX
			PB16/I16/SERCOM5.0/I2SCK0	39	TX_D1
			PB17/SERCOM5.1/I2SMCK0	40	RX_D0
			PB22/I16/SERCOM1+5.2	49	MISO
			PB23/I17/SERCOM1+5.3	50	MOSI
			PB30/I14/SERCOM5.1/SW0	59	
			PB31/I15/SERCOM5.0	60	

QSPI_DATA[0]	17	PA08/I2C/AIN8/SERCOM0.0+2.1/I2SMCK	PA16/I2C/I0/SERCOM1.0+3.1	35	D5
QSPI_DATA[1]	18	PA09/I2C/I9/AIN9/SERCOM0.1+2.0/I2SFS0	PA17/I2C/I1/SERCOM1.1+3.0	36	SCK
QSPI_DATA[2]	19	PA10/I10/AIN10/SERCOM0+2.2/I2SCK	PA18/I2/SERCOM1+3.2	37	D6
QSPI_DATA[3]	20	PA11/I11/AIN11/SERCOM0+2.3/I2SD0	PA19/I3/SERCOM1+3.3	38	D9
SDA	29	PA12/I12/I2C/SERCOM2.0+4.1	PA20/I4/SERCOM3+5.2/I2SFS0	41	D10
SCL	30	PA13/I13/I2C/SERCOM2.1+4.0	PA21/I5/SERCOM3+5.3/I2SD0	42	D11
D4	31	PA14/I14/SERCOM2+4.2	PA22/I2C/I6/SERCOM3.0+5.1/I2SDI	43	D12
	32	PA15/I15/SERCOM2+4.3	PA23/I2C/I7/SERCOM3.1+5.0/SOF/I2SFS1	44	D13
			PA24/I8/SERCOM3+5.2/D-	45	D-
			PA25/I9/SERCOM3+5.3/D+	46	D+
			PA27/I11	51	
			PA30/I14/SERCOM1.2/SWCLK	57	SWCLK
			PA31/I15/SERCOM1.3/SWDIO	58	SWDIO

ISSUE	\${COMPANY}		© \${YEAR}
DRAWN	TITLE		REV
checked	DATE		DRG No
DATE	FILE: \${PROJECTNAME}		PAGE: \${#}/\${##}