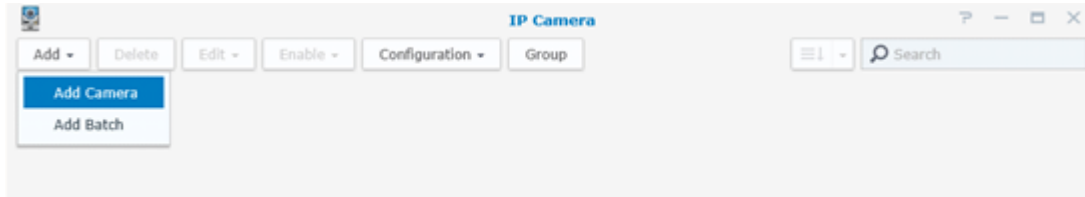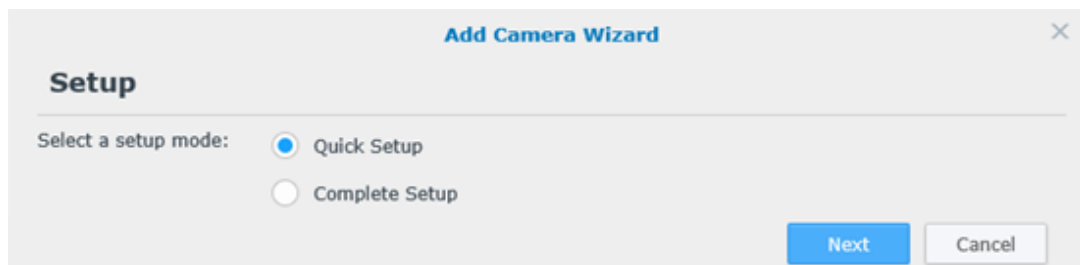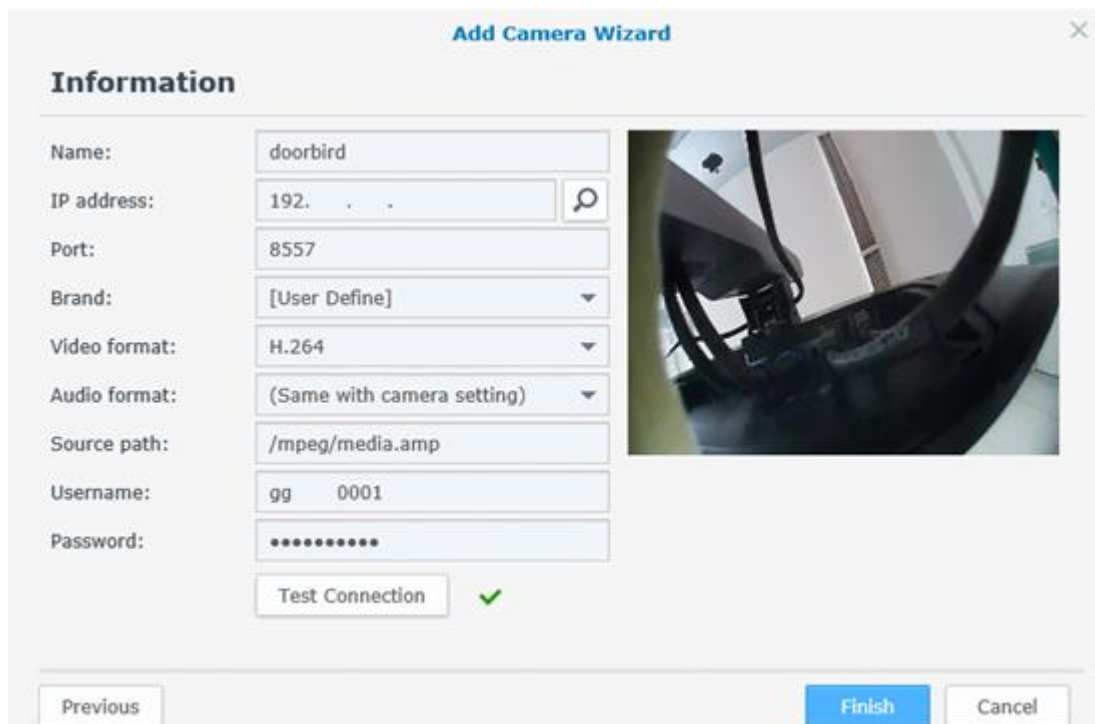# 1. Connecting the DoorBird via RTSP manually

1.1. Open up the Surveillance Settings of Synology and press on **Add Camera**.

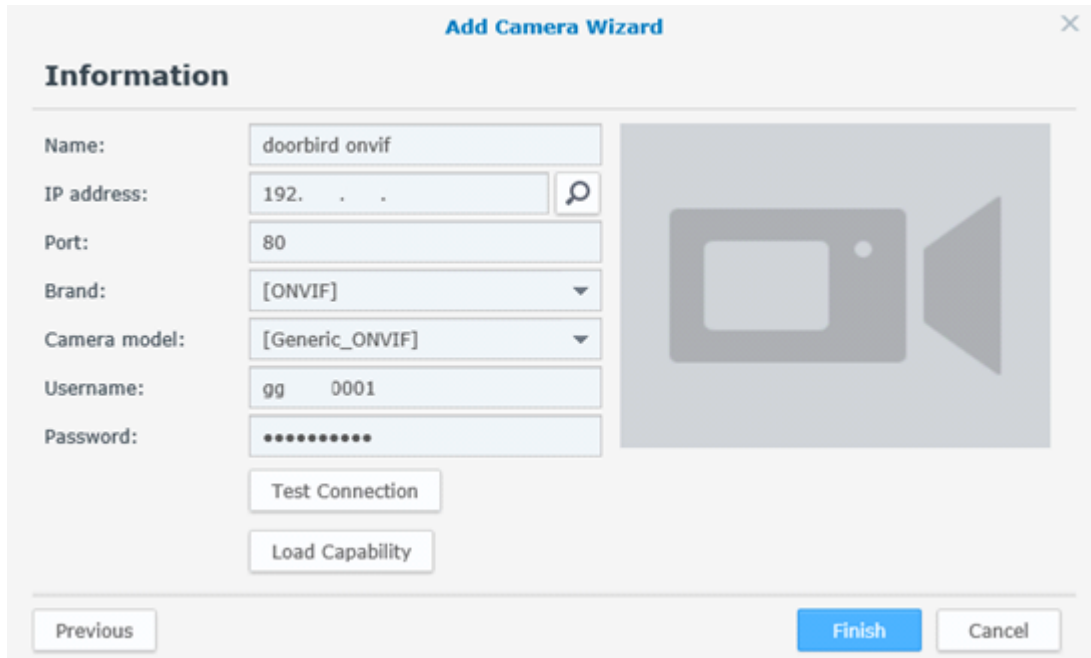1.2. Select **Quick Setup** and press **Next**.

1.3. To add your DoorBird Video IP station as a generic camera, select [**User Define]** from the *Brand* drop-down menu and fill in the rest of fields as shown in the picture below. Please make sure to use the correct username and password from your Digital Passport (e.g. user0001, not the administrator). The video format needs to be **H.264** or the setup will fail.
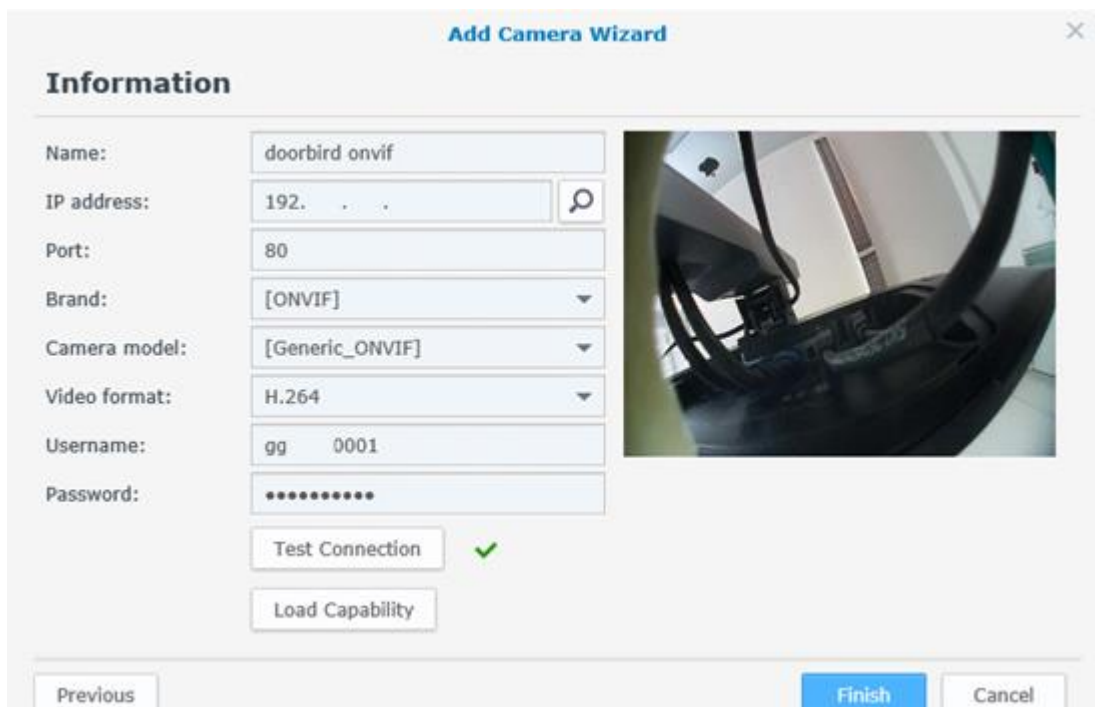

1.4. Press the **Test Connection** button. You can now see the picture and **Finish** the procedure.

2. Connecting the DoorBird via ONVIF directly

2.1. Please have a look at 1.1. and 1.2 first. To add your DoorBird Video IP station as an ONVIF Camera, select [**ONVIF**] from the *Brand* drop-down menu and fill in the rest of fields as shown in the picture below. Please make sure to use the correct username and password from your Digital Passport (e.g. user0001, not the administrator).

2.2. To check the connection, please press the **Test Connection** button. In case of success, a picture from your DoorBird is shown on the right hand side.

2.3. Press the **Finish** button and your DoorBird IP Video Station is ready for use.