
# **500 mA Positive Voltage Regulators**

The MC78M00/MC78M00A Series positive voltage regulators are identical to the popular MC7800 Series devices, except that they are specified for only half the output current. Like the MC7800 devices, the MC78M00 three–terminal regulators are intended for local, on–card voltage regulation.

Internal current limiting, thermal shutdown circuitry and safe—area compensation for the internal pass transistor combine to make these devices remarkably rugged under most operating conditions. Maximum output current, with adequate heatsinking is 500 mA.

#### **Features**

- No External Components Required
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting
- Output Transistor Safe-Area Compensation
- MC78M00A High Accuracy (±2%)
   Available for 5.0 V, 8.0 V, 12 V and 15 V
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These are Pb-Free Devices

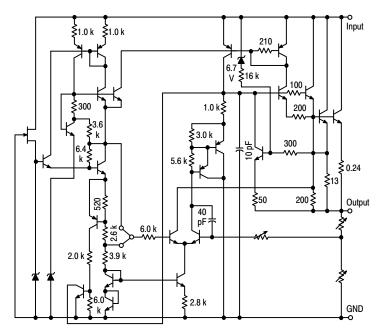


This device contains 28 active transistors.

Figure 1. Representative Schematic Diagram



#### ON Semiconductor®

#### www.onsemi.com



= Voltage Option

XX = Appropriate Suffix Options

A = Assembly Location

WL = Wafer Lot Y = Year

WW = Work Week
G = Pb-Free Package



DPAK-3 DT SUFFIX CASE 369C



Heatsink surface (shown as terminal 4 in case outline drawing) is connected to Pin 2.

xxxxx = Device Type and Voltage Option Code

A = Assembly Location

L = Wafer Lot
Y = Year
WW = Work Week
G = Pb-Free Package

Pin 1. Input 2. Ground 3. Output

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 10–14 of this data sheet.

#### **DEVICE MARKING INFORMATION**

See general marking information in the device marking section on page 10 of this data sheet.

#### **MAXIMUM RATINGS** (T<sub>A</sub> = 25°C, unless otherwise noted) (Note 1)

Rating	Symbol	Value	Unit
Input Voltage (5.0 V-18 V) (20 V-24V)	V <sub>I</sub>	35 40	Vdc
Power Dissipation (Package Limitation) Plastic Package, T Suffix  T <sub>A</sub> = 25°C Thermal Resistance, Junction-to-Air Thermal Resistance, Junction-to-Case Plastic Package, DT Suffix  T <sub>A</sub> = 25°C Thermal Resistance, Junction-to-Air Thermal Resistance, Junction-to-Case	PD θJA θJC PD θJA θJC	Internally Limited 70 5.0 Internally Limited 92 5.0	°C/W
Operating Junction Temperature Range	T <sub>J</sub>	+150	°C
Storage Temperature Range	T <sub>stg</sub>	-65 to +150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. This device series contains ESD protection and exceeds the following tests:

#### MC78M05C/AC/B/AB, NCV78M05AB/B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 10 V, I<sub>O</sub> = 350 mA,  $T_J$  =  $T_{low}$  to  $T_{high}$ ,  $P_D \le 5$  W, unless otherwise noted) (Note 2)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C) MC78M05B/MC78M05C/NCV78M05B MC78M05AB/MC78M05AC/NCV78M05AB	Vo	4.8 4.9	5.0 5.0	5.2 5.1	Vdc
Output Voltage Variation (7.0 Vdc $\leq$ V $_{I}$ $\leq$ 20 Vdc, 5.0 mA $\leq$ I $_{O}$ $\leq$ 350 mA) MC78M05B/MC78M05C/NCV78M05B MC78M05AB/MC78M05AC/NCV78M05AB	Vo	4.75 4.80	- -	5.25 5.20	Vdc
Line Regulation ( $T_J = 25^{\circ}C$ , 7.0 Vdc $\leq V_I \leq 25$ Vdc, $I_O = 200$ mA)	Reg <sub>line</sub>	_	3.0	50	mV
Load Regulation $ (T_J = 25^{\circ}C, 5.0 \text{ mA} \le I_O \le 500 \text{ mA}) $ $ (T_J = 25^{\circ}C, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $	Reg <sub>load</sub>	_ _	20 10	100 50	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	6.0	mA
Quiescent Current Change (8.0 Vdc $\leq$ V <sub>I</sub> $\leq$ 25 Vdc, I <sub>O</sub> = 200 mA) (5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	$\Delta I_{IB}$	_ _	- -	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25$ °C, 10 Hz $\leq$ f $\leq$ 100 kHz)	V <sub>n</sub>	_	40	_	μV
Ripple Rejection ( $I_O = 100$ mA, $f = 120$ Hz, $8.0 \text{ V} \le V_I \le 18 \text{ V}$ ) ( $I_O = 300$ mA, $f = 120$ Hz, $8.0 \le V_I \le 18 \text{ V}$ , $T_J = 25^{\circ}\text{C}$ )	RR	62 62	_ 80	_ _	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	V <sub>I</sub> –V <sub>O</sub>	_	2.0	_	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	I <sub>OS</sub>	-	350	_	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	ΔV <sub>O</sub> /ΔΤ	_	±0.2	-	mV/°C
Peak Output Current $(T_J = 25^{\circ}C)$	Io	_	700	-	mA

<sup>2.</sup>  $T_{low} = 0^{\circ}C \text{ for MC78MxxAC, C}$ 

Human Body Model 2000 V per MIL-STD-883, Method 3015. Machine Model Method 200 V.

 $<sup>= -40^{\</sup>circ}\text{C for MC78MxxAB, B, NCV78MxxAB, B}$   $T_{\text{high}} = +125^{\circ}\text{C for MC78MxxAB, AC, B, C, NCV78MxxAB, B}$ 

### MC78M06C/B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 11 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = T<sub>low</sub> to T<sub>high</sub>, P<sub>D</sub>  $\leq$  5.0 W, unless otherwise noted) (Note 3)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C)	Vo	5.75	6.0	6.25	Vdc
Output Voltage Variation (8.0 Vdc $\leq$ V <sub>I</sub> $\leq$ 21 Vdc, 5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	Vo	5.7	_	6.3	Vdc
Line Regulation (T <sub>J</sub> = 25°C, 8.0 Vdc $\leq$ V <sub>I</sub> $\leq$ 25 Vdc, I <sub>O</sub> = 200 mA)	Reg <sub>line</sub>	_	5.0	50	mV
Load Regulation $ (T_J = 25^{\circ}\text{C}, 5.0 \text{ mA} \le I_O \le 500 \text{ Ma}) \\ (T_J = 25^{\circ}\text{C}, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $		_ _	20 10	120 60	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	6.0	mA
Quiescent Current Change (9.0 Vdc $\leq$ V $_{\rm I}$ $\leq$ 25 Vdc, I $_{\rm O}$ = 200 mA) (5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA)	$\Delta I_{ m lB}$	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25^{\circ}C$ , 10 Hz $\leq f \leq$ 100 kHz)	V <sub>n</sub>	_	45	_	μV
Ripple Rejection ( $I_O = 100$ mA, $f = 120$ Hz, $9.0$ V $\leq$ V $_I \leq$ 19 V) ( $I_O = 300$ mA, $f = 120$ Hz, $9.0$ V $\leq$ V $_I \leq$ 19 V, $T_J = 25^{\circ}$ C)	RR	59 59	_ 80	_ _	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	$V_I - V_O$	_	2.0	_	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	I <sub>OS</sub>	_	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_{O}/\Delta T$	-	±0.2	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	I <sub>O</sub>	_	700	-	mA

#### MC78M08C/AC/B/AB, NCV78M08B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 14 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = T<sub>low</sub> to T<sub>high</sub>, P<sub>D</sub>  $\leq$  5 W, unless otherwise noted) (Note 3)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C) MC78M08B/MC78M08C/NCV78M08B MC78M08AB/MC78M08AC	Vo	7.70 7.84	8.0 8.0	8.30 8.16	Vdc
Output Voltage Variation (10.5 Vdc $\leq$ V $_{\rm I}$ $\leq$ 23 Vdc, 5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA) MC78M08B/MC78M08C/NCV78M08B MC78M08AB/MC78M08AC	Vo	7.6 7.7	_ _	8.4 8.3	Vdc
Line Regulation (T <sub>J</sub> = 25°C, 10.5 Vdc $\leq$ V <sub>I</sub> $\leq$ 25 Vdc, I <sub>O</sub> = 200 mA)	Reg <sub>line</sub>	_	6.0	50	mV
Load Regulation $ (T_J = 25^\circ C, 5.0 \text{ mA} \le I_O \le 500 \text{ mA}) \\ (T_J = 25^\circ C, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $	Reg <sub>load</sub>	- -	25 10	160 80	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	-	3.2	6.0	mA
Quiescent Current Change (10.5 Vdc $\leq$ V $_{\rm I}$ $\leq$ 25 Vdc, I $_{\rm O}$ = 200 mA) (5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA)	$\Delta I_{IB}$	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25$ °C, 10 Hz $\leq$ f $\leq$ 100 kHz)	V <sub>n</sub>	_	52	-	μV
Ripple Rejection (I <sub>O</sub> = 100 mA, f = 120 Hz, 11.5 V $\leq$ V <sub>I</sub> $\leq$ 21.5 V) (I <sub>O</sub> = 300 mA, f = 120 Hz, 11.5 V $\leq$ V <sub>I</sub> $\leq$ 21.5 V, T <sub>J</sub> = 25°C)	RR	56 56	_ 80	_ _	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	V <sub>I</sub> –V <sub>O</sub>	_	2.0	-	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	los	-	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_{O}/\Delta T$	-	±0.2	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	I <sub>O</sub>	_	700	-	mA

<sup>3.</sup>  $T_{low} = 0$ °C for MC78MxxAC, C = -40°C for MC78MxxAB, B, NCV78MxxAB, B  $T_{high} = +125$ °C for MC78MxxAB, AC, B, C, NCV78MxxAB, B

### MC78M09C/B, NCV78M09B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 15 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = T<sub>low</sub> to T<sub>high</sub>, P<sub>D</sub>  $\leq$  5.0 W, unless otherwise noted) (Note 4)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage ( $T_J = 25^{\circ}C$ )	Vo	8.64	9.0	9.45	Vdc
Output Voltage Variation (11.5 Vdc $\leq$ V <sub>I</sub> $\leq$ 23 Vdc, 5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	Vo	8.55	_	9.45	Vdc
Line Regulation ( $T_J = 25^{\circ}C$ , 11.5 Vdc $\leq V_I \leq 25$ Vdc, $I_O = 200$ mA)	Reg <sub>line</sub>	_	6.0	50	mV
Load Regulation $ (T_J = 25^{\circ}\text{C}, 5.0 \text{ mA} \le I_O \le 500 \text{ mA}) $ $ (T_J = 25^{\circ}\text{C}, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $		_ _	25 10	180 90	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	6.0	mA
Quiescent Current Change (11.5 Vdc $\leq$ V <sub>I</sub> $\leq$ 25 Vdc, I <sub>O</sub> = 200 mA) (5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	Δl <sub>IB</sub>	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25^{\circ}C$ , 10 Hz $\leq$ f $\leq$ 100 kHz)	V <sub>n</sub>	_	52	_	μV
Ripple Rejection ( $I_O$ = 100 mA, f = 120 Hz, 12.5 V $\leq$ V $_I$ $\leq$ 22.5 V) ( $I_O$ = 300 mA, f = 120 Hz, 12.5 V $\leq$ V $_I$ $\leq$ 22.5 V, T $_J$ = 25°C)	RR	56 56	_ 80	_ _	dB
Dropout Voltage ( $T_J = 25^{\circ}C$ )	V <sub>I</sub> –V <sub>O</sub>	_	2.0	_	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	los	-	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	ΔV <sub>O</sub> /ΔT	_	±0.2	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	Io	_	700	-	mA

### MC78M12C/AC/B/AB, NCV78M12B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 19 V, I<sub>O</sub> = 350 mA,  $T_J$  =  $T_{low}$  to  $T_{high}$ ,  $P_D \le 5$  W, unless otherwise noted) (Note 4)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C) MC78M12B/MC78M12C/NCV78M12B MC78M12AB/MC78M12AC	Vo	11.50 11.76	12 12	12.50 12.24	Vdc
Output Voltage Variation (14.5 Vdc $\leq$ V $_{I}$ $\leq$ 27 Vdc, 5.0 mA $\leq$ I $_{O}$ $\leq$ 350 mA) MC78M12B/MC78M12C/NCV78M12B MC78M12AB/MC78M12AC	Vo	11.4 11.5	_ _	12.6 12.5	Vdc
Line Regulation ( $T_J = 25^{\circ}C$ , 14.5 Vdc $\leq V_I \leq 30$ Vdc, $I_O = 200$ mA)	Reg <sub>line</sub>	-	8.0	50	mV
Load Regulation $ (T_J = 25^\circ C, 5.0 \text{ mA} \le I_O \le 500 \text{ mA}) \\ (T_J = 25^\circ C, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $	Reg <sub>load</sub>	_ _	25 10	240 120	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	-	3.2	6.0	mA
Quiescent Current Change (14.5 Vdc $\leq$ V $_{\rm I}$ $\leq$ 30 Vdc, I $_{\rm O}$ = 200 mA) (5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA)	Δl <sub>IB</sub>	_ _	_ _	0.8 0.5	mA
Output Noise Voltage (T <sub>A</sub> = 25°C, 10 Hz ≤ f ≤ 100 kHz)	V <sub>n</sub>	_	75	_	μV
Ripple Rejection (I <sub>O</sub> = 100 mA, f = 120 Hz, 15 V $\leq$ V <sub>I</sub> $\leq$ 25 V) (I <sub>O</sub> = 300 mA, f = 120 Hz, 15 V $\leq$ V <sub>I</sub> $\leq$ 25 V, T <sub>J</sub> = 25°C)	RR	55 55	- 80	- -	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	V <sub>I</sub> –V <sub>O</sub>	_	2.0	-	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	Ios	_	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_{O}/\Delta T$	-	±0.3	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	Io	-	700	-	mA

<sup>4.</sup> T<sub>low</sub> = 0°C for MC78MxxAC, C = -40°C for MC78MxxAB, B, NCV78MxxAB, B T<sub>high</sub> = +125°C for MC78MxxAB, AC, B, C, NCV78MxxAB, B

### MC78M15C/AC/B/AB, NCV78M15B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 23 V, I<sub>O</sub> = 350 mA,  $T_J = T_{low}$  to  $T_{high}$ ,  $P_D \le 5$  W, unless otherwise noted) (Note 5)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C) MC78M15B/MC78M15C/NCV78M15B MC78M15AB/MC78M15AC	Vo	14.4 14.7	15 15	15.6 15.3	Vdc
Output Voltage Variation (17.5 Vdc $\leq$ V $_{\rm I}$ $\leq$ 30 Vdc, 5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA) MC78M15B/MC78M15C/NCV78M15B MC78M15AB/MC78M15AC	Vo	14.25 14.40	_ _	15.75 15.60	Vdc
Input Regulation (T <sub>J</sub> = 25°C, 17.5 Vdc $\leq$ V <sub>I</sub> $\leq$ 30 Vdc, I <sub>O</sub> = 200 mA)	Reg <sub>line</sub>	_	10	50	mV
Load Regulation $ (T_J = 25^{\circ}C, 5.0 \text{ mA} \le I_O \le 500 \text{ mA}) \\ (T_J = 25^{\circ}C, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $	Reg <sub>load</sub>	_ _	25 10	300 150	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	6.0	mA
Quiescent Current Change (17.5 $Vdc \le V_1 \le 30 Vdc$ , $I_O = 200 mA$ ) (5.0 $mA \le I_O \le 350 mA$ )	$\Delta I_{IB}$	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25^{\circ}C$ , 10 Hz $\leq f \leq$ 100 kHz)	Vn	_	90	_	μV
Ripple Rejection (I <sub>O</sub> = 100 mA, f = 120 Hz, 18.5 V $\leq$ V <sub>I</sub> $\leq$ 28.5 V) (I <sub>O</sub> = 300 mA, f = 120 Hz, 18.5 V $\leq$ V <sub>I</sub> $\leq$ 28.5 V, T <sub>J</sub> = 25°C)	RR	54 54	- 70	- -	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	V <sub>I</sub> –V <sub>O</sub>	_	2.0	_	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	Ios	_	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_{O}/\Delta T$	_	±0.3	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	I <sub>O</sub>	_	700	_	mA

#### MC78M18C/B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 27 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> = T<sub>low</sub> to T<sub>high</sub>, P<sub>D</sub>  $\leq$  5 W, unless otherwise noted) (Note 5)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C)	Vo	17.3	18	18.7	Vdc
Output Voltage Variation (21 Vdc $\leq$ V <sub>I</sub> $\leq$ 33 Vdc, 5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	Vo	17.1	_	18.9	Vdc
Line Regulation (T <sub>J</sub> = $25^{\circ}$ C, 21 Vdc $\leq$ V <sub>I</sub> $\leq$ 33 Vdc, I <sub>O</sub> = 200 mA)	Reg <sub>line</sub>	_	10	50	mV
Load Regulation $ (T_J = 25^\circ C, 5.0 \text{ mA} \le I_O \le 500 \text{ mA}) \\ (T_J = 25^\circ C, 5.0 \text{ mA} \le I_O \le 200 \text{ mA}) $	Reg <sub>load</sub>	_ _	30 10	360 180	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	6.5	mA
Quiescent Current Change (21 Vdc $\leq$ V $_{\rm I}$ $\leq$ 33 Vdc, I $_{\rm O}$ = 200 mA) (5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA)	Δl <sub>IB</sub>	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25$ °C, 10 Hz $\leq$ f $\leq$ 100 kHz)	V <sub>n</sub>	_	100	-	μV
Ripple Rejection (I <sub>O</sub> = 100 mA, f = 120 Hz, 22 V $\leq$ V <sub>I</sub> $\leq$ 32 V) (I <sub>O</sub> = 300 mA, f = 120 Hz, 22 V $\leq$ V <sub>I</sub> $\leq$ 32 V, T <sub>J</sub> = 25°C)	RR	53 53	_ 70	_ _	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	V <sub>I</sub> –V <sub>O</sub>	_	2.0	_	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	I <sub>OS</sub>	-	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_{O}/\Delta T$	-	±0.3	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	Io	_	700	_	mA

<sup>5.</sup> T<sub>low</sub> = 0°C for MC78MxxAC, C = -40°C for MC78MxxAB, B, NCV78MxxAB, B T<sub>high</sub> = +125°C for MC78MxxAB, AC, B, C, NCV78MxxAB, B

### MC78M20C/B ELECTRICAL CHARACTERISTICS

(V<sub>I</sub> = 29 V, I<sub>O</sub> = 350 mA, T<sub>J</sub> =  $T_{low}$  to  $T_{high}$ ,  $P_D \le 5.0$  W, unless otherwise noted) (Note 6)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C)	Vo	19.2	20	20.8	Vdc
Output Voltage Variation (23 Vdc $\leq$ V <sub>I</sub> $\leq$ 35 Vdc, 5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	Vo	19	_	21	Vdc
Line Regulation (T <sub>J</sub> = 25°C, 23 Vdc $\leq$ V <sub>I</sub> $\leq$ 35 Vdc, I <sub>O</sub> = 200 mA)	Reg <sub>line</sub>	_	10	50	mV
Load Regulation $ (T_J = 25^\circ\text{C}, 5.0 \text{ mA} \leq I_O \leq 500 \text{ mA}) \\ (T_J = 25^\circ\text{C}, 5.0 \text{ mA} \leq I_O \leq 200 \text{ mA}) $ Reg <sub>load</sub>		_ _	30 10	400 200	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	6.5	mA
Quiescent Current Change (23 Vdc $\leq$ V $_{\rm I}$ $\leq$ 35 Vdc, I $_{\rm O}$ = 200 mA) (5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA)	$\Delta I_{IB}$	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25^{\circ}C$ , 10 Hz $\leq$ f $\leq$ 100 kHz)	V <sub>n</sub>	-	110	_	μV
Ripple Rejection (I <sub>O</sub> = 100 mA, f = 120 Hz, 24 V $\leq$ V <sub>I</sub> $\leq$ 34 V) (I <sub>O</sub> = 300 mA, f = 120 Hz, 24 V $\leq$ V <sub>I</sub> $\leq$ 34 V, T <sub>J</sub> = 25°C)	RR	52 52	- 70	_ _	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	V <sub>I</sub> –V <sub>O</sub>	_	2.0	-	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C, V <sub>I</sub> = 35 V)	los	_	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_{O}/\Delta T$	_	±0.5	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	I <sub>O</sub>	_	700	_	mA

#### MC78M24C/B ELECTRICAL CHARACTERISTICS

(VI = 33 V, I\_O = 350 mA, T\_J =  $T_{low}$  to  $T_{high}$ ,  $P_D \le 5.0$  W, unless otherwise noted) (Note 6)

Characteristics	Symbol	Min	Тур	Max	Unit
Output Voltage (T <sub>J</sub> = 25°C)	Vo	23	24	25	Vdc
Output Voltage Variation (27 Vdc $\leq$ V <sub>I</sub> $\leq$ 38 Vdc, 5.0 mA $\leq$ I <sub>O</sub> $\leq$ 350 mA)	V <sub>O</sub>	22.8	-	25.2	Vdc
Line Regulation ( $T_J = 25^{\circ}C$ , 27 Vdc $\leq V_I \leq 38$ Vdc, $I_O = 200$ mA)	Reg <sub>line</sub>	_	10	50	mV
Load Regulation $(T_J = 25^{\circ}C, 5.0 \text{ mA} \le I_O \le 500 \text{ mA})$ $(T_J = 25^{\circ}C, 5.0 \text{ mA} \le I_O \le 200 \text{ mA})$		_ _	30 10	480 240	mV
Input Bias Current (T <sub>J</sub> = 25°C)	I <sub>IB</sub>	_	3.2	7.0	mA
Quiescent Current Change (27 Vdc $\leq$ V $_{\rm I}$ $\leq$ 38 Vdc, I $_{\rm O}$ = 200 mA) (5.0 mA $\leq$ I $_{\rm O}$ $\leq$ 350 mA)	Δl <sub>IB</sub>	_ _	_ _	0.8 0.5	mA
Output Noise Voltage ( $T_A = 25^{\circ}C$ , 10 Hz $\leq$ f $\leq$ 100 kHz)	V <sub>n</sub>	_	170	_	μV
Ripple Rejection (I <sub>O</sub> = 100 mA, f = 120 Hz, 28 V $\leq$ V <sub>I</sub> $\leq$ 38 V) (I <sub>O</sub> = 300 mA, f = 120 Hz, 28 V $\leq$ V <sub>I</sub> $\leq$ 38 V, T <sub>J</sub> = 25°C)	RR	50 50	- 70	_ _	dB
Dropout Voltage (T <sub>J</sub> = 25°C)	$V_I - V_O$	_	2.0	_	Vdc
Short Circuit Current Limit (T <sub>J</sub> = 25°C)	los	_	350	-	mA
Average Temperature Coefficient of Output Voltage (I <sub>O</sub> = 5.0 mA)	$\Delta V_O/\Delta T$	_	±0.5	-	mV/°C
Peak Output Current (T <sub>J</sub> = 25°C)	Io	_	700	_	mA

<sup>6.</sup>  $T_{low} = 0^{\circ}C$  for MC78MxxAC, C = -40°C for MC78MxxAB, B  $T_{high} = +125^{\circ}C$  for MC78MxxAB, AC, B, C

#### **DEFINITIONS**

**Line Regulation** – The change in output voltage for a change in the input voltage. The measurement is made under conditions of low dissipation or by using pulse techniques such that the average chip temperature is not significantly affected.

**Load Regulation** – The change in output voltage for a change in load current at constant chip temperature.

**Maximum Power Dissipation** – The maximum total device dissipation for which the regulator will operate within specifications.

**Input Bias Current** – That part of the input current that is not delivered to the load.

**Output Noise Voltage** – The rms AC voltage at the output, with constant load and no input ripple, measured over a specified frequency range.

**Long Term Stability** – Output voltage stability under accelerated life test conditions with the maximum rated voltage listed in the devices' electrical characteristics and maximum power dissipation.

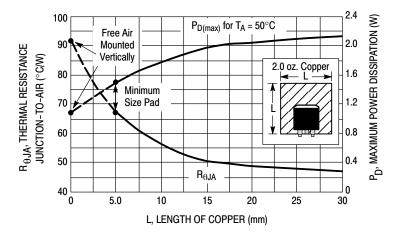


Figure 2. DPAK Thermal Resistance and Maximum Power Dissipation versus P.C.B. Copper Length

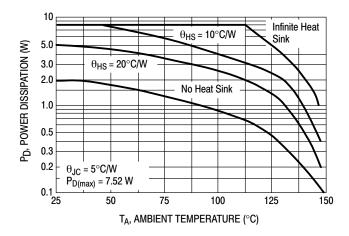


Figure 3. Worst Case Power Dissipation versus Ambient Temperature (TO-220)

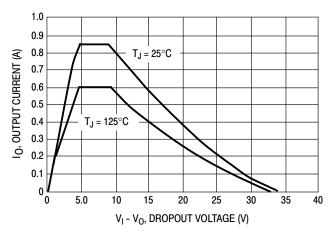


Figure 4. Peak Output Current versus Dropout Voltage

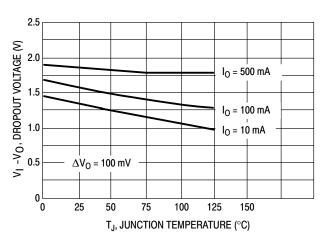


Figure 5. Dropout Voltage versus Junction Temperature

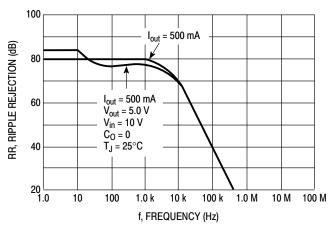


Figure 6. Ripple Rejection versus Frequency

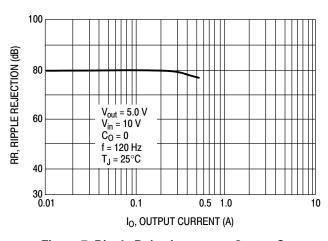


Figure 7. Ripple Rejection versus Output Current

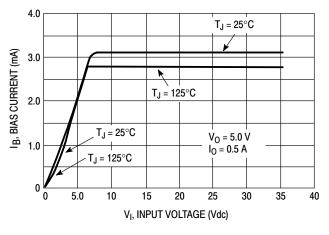


Figure 8. Bias Current versus Input Voltage

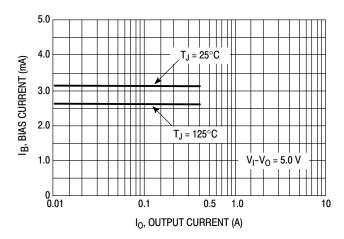



Figure 9. Bias Current versus Output Current

#### **APPLICATIONS INFORMATION**

#### **Design Considerations**

The MC78M00/MC78M00A Series of fixed voltage regulators are designed with Thermal Overload Protection that shuts down the circuit when subjected to an excessive power overload condition, Internal Short Circuit Protection that limits the maximum current the circuit will pass, and Output Transistor Safe—Area Compensation that reduces the output short circuit current as the voltage across the pass transistor is increased.

In many low current applications, compensation capacitors are not required. However, it is recommended that the regulator input be bypassed with a capacitor if the




The MC78M00 regulators can also be used as a current source when connected as above. In order to minimize dissipation the MC78M05C is chosen in this application. Resistor R determines the current as follows:

$$I_0 = \frac{5.0 \text{ V}}{\text{R}} + I_{IB}$$

I<sub>IB</sub> = 1.5 mA over line and load changes.

For example, a 500 mA current source would require R to be a 10  $\Omega$ , 10 W resistor and the output voltage compliance would be the input voltage less 7.0 V.

Figure 10. Current Regulator

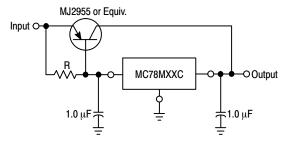


XX = 2 digits of type number indicating voltage.

The MC78M00 series can be current boosted with a PNP transistor. The MJ2955 provides current to 5.0 A. Resistor R in conjunction with the  $V_{BE}$  of the PNP determines when the pass transistor begins conducting; this circuit is not short circuit proof. Input-output differential voltage minimum is increased by  $V_{BE}$  of the pass transistor.


Figure 12. Current Boost Regulator

regulator is connected to the power supply filter with long wire lengths, or if the output load capacitance is large. An input bypass capacitor should be selected to provide good high frequency characteristics to insure stable operation under all load conditions. A 0.33  $\mu F$  or larger tantalum, mylar, or other capacitor having low internal impedance at high frequencies should be chosen. The bypass capacitor should be mounted with the shortest possible leads directly across the regulator's input terminals. Normally good construction techniques should be used to minimize ground loops and lead resistance drops since the regulator has no external sense lead.

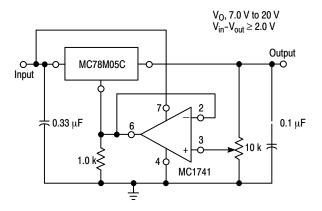

The addition of an operational amplifier allows adjustment to higher or intermediate values while retaining regulation characteristics. The minimum voltage obtainable with this arrangement is 2.0 V greater than the regulator voltage.

Figure 11. Adjustable Output Regulator

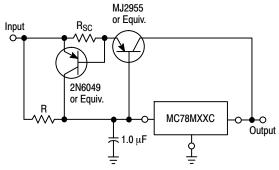

XX = 2 digits of type number indicating voltage.

The circuit of Figure 12 can be modified to provide supply protection against short circuits by adding a short circuit sense resistor,  $R_{\rm sc}$ , and an additional PNP transistor. The current sensing PNP must be able to handle the short circuit current of the three–terminal regulator .Therefore, a 4.0 A plastic power transistor is specified.

Figure 13. Current Boost with Short Circuit Protection

#### **ORDERING INFORMATION**

Device	Output Voltage	Temperature Range	Package	Marking	Shipping <sup>†</sup>
MC78M05CDTG	5.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M05	75 Units / Rail
MC78M05CDTT5G	5.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M05	2500 / Tape & Reel
MC78M05CDTRKG	5.0 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	78M05	2500 / Tape & Reel
MC78M05ACDTG	5.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	DPAK-3 (Pb-Free)	8M05D	75 Units / Rail
MC78M05ACDTRKG	5.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05D	2500 / Tape & Reel
MC78M05CTG	5.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M05CT	50 Units / Rail
MC78M05ACTG	5.0 V	$T_J = 0^\circ$ to +125°C	TO-220 (Pb-Free)	78M05ACT	50 Units / Rail
MC78M05ABDTG	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05A	75 Units / Rail
MC78M05ABDTRKG	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05A	2500 / Tape & Reel
NCV78M05ABDTRKG*	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05A	2500 / Tape & Reel
MC78M05ABTG	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M05ABT	50 Units / Rail
MC78M05BDTG	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05B	75 Units / Rail
MC78M05BDTT5G	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05B	2500 / Tape & Reel
MC78M05BDTRKG	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05B	2500 / Tape & Reel
NCV78M05BDTRKG*	5.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M05B	2500 / Tape & Reel
MC78M05BTG	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M05BT	50 Units / Rail
NCV78M05BTG*	5.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M05BT	50 Units / Rail
MC78M06CDTG	6.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	DPAK-3 (Pb-Free)	78M06	75 Units / Rail
MC78M06CDTRKG	6.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M06	2500 / Tape & Reel
MC78M06CTG	6.0 V	$T_J = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M06CT	50 Units / Rail
MC78M06BTG	6.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M06BT	50 Units / Rail
MC78M06BDTRKG	6.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M06B	2500 / Tape & Reel
MC78M08CDTG	8.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M08	75 Units / Rail

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging

Specifications Brochure, BRD8011/D.
\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

#### **ORDERING INFORMATION** (continued)

Device	Output Voltage	Temperature Range	Package	Marking	Shipping <sup>†</sup>
MC78M08CDTRKG	8.0 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	78M08	2500 Units / Tape & Reel
MC78M08ACDTG	8.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M08D	75 Units / Rail
MC78M08ACDTRKG	8.0 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	8M08D	2500 Units / Tape & Reel
MC78M08CTG	8.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M08CT	50 Units / Rail
MC78M08ACTG	8.0 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M08ACT	50 Units / Rail
MC78M08ABDTG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M08A	75 Units / Rail
MC78M08ABDTRKG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M08A	2500 Units / Tape & Reel
MC78M08ABTG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M08ABT	50 Units / Rail
MC78M08BDTG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M08B	75 Units / Rail
MC78M08BDTRKG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M08B	2500 Units / Tape & Reel
NCV78M08BDTRKG*	8.0 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M08B	2500 Units / Tape & Reel
MC78M08BTG	8.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M08BT	50 Units / Rail
MC78M09CDTG	9.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	DPAK-3 (Pb-Free)	78M09	75 Units / Rail
MC78M09CDTRKG	9.0 V	$T_J = 0^\circ$ to $+125^\circ C$	DPAK-3 (Pb-Free)	78M09	2500 Units / Tape & Reel
MC78M09CTG	9.0 V	$T_J = 0^\circ$ to $+125^\circ$ C	TO-220 (Pb-Free)	78M09CT	50 Units / Rail
MC78M09BDTG	9.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M09B	75 Units / Rail
MC78M09BDTRKG	9.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M09B	2500 Units / Tape & Reel
NCV78M09BDTRKG*	9.0 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M09B	2500 Units / Tape & Reel
MC78M12CDTG	12 V	$T_J = 0^\circ$ to $+125^\circ$ C	DPAK-3 (Pb-Free)	78M12	75 Units / Rail
MC78M12CDTT5G	12 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M12	2500 Units / Tape & Reel
MC78M12CDTRKG	12 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	78M12	2500 Units / Tape & Reel
MC78M12ACDTG	12 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	8M12D	75 Units / Rail
MC78M12ACDTRKG	12 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	8M12D	2500 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging

Specifications Brochure, BRD8011/D.
\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

#### **ORDERING INFORMATION** (continued)

Device	Output Voltage	Temperature Range	Package	Marking	Shipping <sup>†</sup>
MC78M12CTG	12 V	$T_J = 0^\circ$ to +125°C	TO-220 (Pb-Free)	78M12CT	50 Units / Rail
MC78M12ACTG	12 V	$T_J = 0^\circ$ to +125°C	TO-220 (Pb-Free)	78M12ACT	50 Units / Rail
MC78M12ABDTG	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M12A	75 Units / Rail
MC78M12ABDTRKG	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M12A	2500 Units / Tape & Reel
MC78M12ABTG	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M12ABT	50 Units / Rail
MC78M12BDTG	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M12B	75 Units / Rail
MC78M12BDTRKG	12 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M12B	2500 Units / Tape & Reel
NCV78M12BDTRKG*	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M12B	2500 Units / Tape & Reel
MC78M12BTG	12 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M12BT	50 Units / Rail
MC78M15CDTG	15 V	$T_J = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M15	75 Units / Rail
MC78M15CDTT5G	15 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	78M15	2500 Units / Tape & Reel
MC78M15CDTRKG	15 V	$T_J = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M15	2500 Units / Tape & Reel
MC78M15ACDTG	15 V	$T_J = 0^\circ$ to +125°C	DPAK-3 (Pb-Free)	8M15D	75 Units / Rail
MC78M15ACDTRKG	15 V	$T_J = 0^\circ$ to $+125^\circ$ C	DPAK-3 (Pb-Free)	8M15D	2500 Units / Tape & Reel
MC78M15CTG	15 V	$T_J = 0^\circ$ to +125°C	TO-220 (Pb-Free)	78M15CT	50 Units / Rail
MC78M15ACTG	15 V	$T_J = 0^\circ$ to +125°C	TO-220 (Pb-Free)	78M15ACT	50 Units / Rail
MC78M15ABDTG	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M15A	75 Units / Rail
MC78M15ABDTRKG	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M15A	2500 Units / Tape & Reel
MC78M15ABTG	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M15ABT	50 Units / Rail
MC78M15BDTG	15 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M15B	75 Units / Rail
NCV78M15BDTG*	15 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M15B	75 Units / Rail
MC78M15BDTRKG	15 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M15B	2500 Units / Tape & Reel
NCV78M15BDTRKG*	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	8M15B	2500 Units / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging

Specifications Brochure, BRD8011/D.
\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

#### **ORDERING INFORMATION** (continued)

Device	Output Voltage	Temperature Range	Package	Marking	Shipping <sup>†</sup>
MC78M15BTG	15 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M15BT	50 Units / Rail
MC78M18CDTG	18 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M18	75 Units / Rail
MC78M18CDTRKG	18 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	DPAK-3 (Pb-Free)	78M18	2500 Units / Tape & Reel
MC78M18CTG	18 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M18CT	50 Units / Rail
MC78M18BTG	18 V	$T_{J} = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M18BT	50 Units / Rail
MC78M20CTG	20 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M20CT	50 Units / Rail
MC78M24CTG	24 V	$T_{J} = 0^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M24CT	50 Units / Rail
MC78M24BTG	24 V	$T_J = -40^{\circ} \text{ to } +125^{\circ}\text{C}$	TO-220 (Pb-Free)	78M24BT	50 Units / Rail

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NCV devices: T<sub>low</sub> = -40°C, T<sub>high</sub> = +125°C. Guaranteed by design. NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable.

# **MECHANICAL CASE OUTLINE**

**PACKAGE DIMENSIONS** 





#### TO-220, SINGLE GAUGE CASE 221AB-01 **ISSUE A**

**DATE 16 NOV 2010** 

- NOTES:

  1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.

  2. CONTROLLING DIMENSION: INCHES.

  3. DIMENSION 2 DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARTIES ARE ALLOWED.

  4. PRODUCT SHIPPED PRIOR TO 2008 HAD DIMENSIONS S = 0.045 0.055 INCHES (1.143 1.397 MM)

	INCHES		MILLIN	IETERS
DIM	MIN	MAX	MIN	MAX
Α	0.570	0.620	14.48	15.75
В	0.380	0.405	9.66	10.28
С	0.160	0.190	4.07	4.82
D	0.025	0.035	0.64	0.88
F	0.142	0.147	3.61	3.73
G	0.095	0.105	2.42	2.66
Н	0.110	0.155	2.80	3.93
J	0.018	0.025	0.46	0.64
K	0.500	0.562	12.70	14.27
L	0.045	0.060	1.15	1.52
N	0.190	0.210	4.83	5.33
Q	0.100	0.120	2.54	3.04
R	0.080	0.110	2.04	2.79
S	0.020	0.024	0.508	0.61
T	0.235	0.255	5.97	6.47
U	0.000	0.050	0.00	1.27
٧	0.045		1.15	
Z		0.080		2.04





STYLE 1: PIN 1. 2. 3. 4.	EMITTER	STYLE 2: PIN 1. 2. 3. 4.		STYLE 3: PIN 1. 2. 3. 4.	CATHODE ANODE GATE ANODE
STYLE 5: PIN 1. 2. 3. 4.	GATE DRAIN SOURCE DRAIN	STYLE 6: PIN 1. 2. 3. 4.	ANODE CATHODE ANODE CATHODE	STYLE 7: PIN 1. 2. 3. 4.	CATHODE ANODE CATHODE ANODE
STYLE 9: PIN 1. 2. 3. 4.	GATE COLLECTOR EMITTER COLLECTOR	STYLE 10: PIN 1. 2. 3. 4.	GATE	STYLE 11: PIN 1. 2. 3. 4.	DRAIN SOURCE GATE SOURCE

STYLE 4: PIN 1. 2. 3. 4.	MAIN TERMINAL 2
2. 3.	CATHODE ANODE EXTERNAL TRIP/DELAY ANODE

DOCUMENT NUMBER:	98AON23085D	Electronic versions are uncontrolled except when accessed directly from the Document Repo- Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	TO-220, SINGLE GAUGE		PAGE 1 OF 1

ON Semiconductor and III are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

**DETAIL A** ROTATED 90° CW

STYLE 2:

STYLE 1:

# **DPAK (SINGLE GAUGE)** CASE 369C ISSUE F

**DATE 21 JUL 2015** 

- IOTES. 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994. 2. CONTROLLING DIMENSION: INCHES. 3. THERMAL PAD CONTOUR OPTIONAL WITHIN DI-

- MENSIONS b3, L3 and Z.


  Jimensions b And E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 INCHES PER SIDE.

  MENSIONS D AND E ARE DETERMINED AT THE
- OUTERMOST EXTREMES OF THE PLASTIC BODY.

  6. DATUMS A AND B ARE DETERMINED AT DATUM
- 7. OPTIONAL MOLD FEATURE.

	INC	HES	MILLIM	ETERS
DIM	MIN	MAX	MIN	MAX
Α	0.086	0.094	2.18	2.38
A1	0.000	0.005	0.00	0.13
b	0.025	0.035	0.63	0.89
b2	0.028	0.045	0.72	1.14
b3	0.180	0.215	4.57	5.46
С	0.018	0.024	0.46	0.61
c2	0.018	0.024	0.46	0.61
D	0.235	0.245	5.97	6.22
Е	0.250	0.265	6.35	6.73
е	0.090	BSC	2.29	BSC
Н	0.370	0.410	9.40	10.41
L	0.055	0.070	1.40	1.78
L1	0.114	REF	2.90	REF
L2	0.020 BSC		0.51	BSC
L3	0.035	0.050	0.89	1.27
L4		0.040		1.01
Z	0.155		3.93	

#### **GENERIC MARKING DIAGRAM\***



XXXXXX = Device Code = Assembly Location Α

L = Wafer Lot Υ = Year WW = Work Week G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking.

#### SCALE 1:1 Α -h3 В L3 Ζ Ո DETAIL A NOTE 7 **BOTTOM VIEW** Cb2 е SIDE VIEW | $\oplus$ | 0.005 (0.13) lacktriangle C **TOP VIEW** Z Ħ L2 GAUGE C SEATING PLANE **BOTTOM VIEW A1** ALTERNATE CONSTRUCTIONS


OTTLL I.	OTTLL	••	OTTLE 5.	_	/ I I LL T.	OTTLE 5.
PIN 1. BASE	PIN 1.	GATE	PIN 1. ANODE	Ē	PIN 1. CATHODE	PIN 1. GATE
2. COLLEC	CTOR 2.	DRAIN	<ol><li>CATHO</li></ol>	DE	<ol><li>ANODE</li></ol>	2. ANODE
<ol><li>EMITTE</li></ol>	R 3.	SOURCE	<ol><li>ANODE</li></ol>	Ē	<ol><li>GATE</li></ol>	<ol><li>CATHODE</li></ol>
4. COLLEC	CTOR 4.	DRAIN	4. CATHO	DE	<ol><li>ANODE</li></ol>	<ol><li>ANODE</li></ol>
STYLE 6:	STYLE 7:	STYLE	8:	STYLE 9:		STYLE 10:
PIN 1. MT1	PIN 1. GATE	PIN 1.	. N/C	PIN 1. /	ANODE	PIN 1. CATHODE
2. MT2	<ol><li>COLLEC</li></ol>	TOR 2.	CATHODE	2. (	CATHODE	<ol><li>ANODE</li></ol>
<ol><li>GATE</li></ol>	<ol><li>EMITTER</li></ol>	3.	ANODE	3. I	RESISTOR ADJUST	<ol><li>CATHODE</li></ol>
4. MT2	<ol><li>COLLEC</li></ol>	TOR 4.	CATHODE	4. (	CATHODE	4. ANODE

STYLE 4:

STYLE 5:

STYLE 3:

#### **SOLDERING FOOTPRINT\***



\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

DOCUMENT NUMBER:	98AON10527D	Electronic versions are uncontrolled	•
STATUS:	ON SEMICONDUCTOR STANDARD	accessed directly from the Document F versions are uncontrolled except w	
NEW STANDARD:	REF TO JEDEC TO-252	"CONTROLLED COPY" in red.	
DESCRIPTION:	DPAK SINGLE GAUGE SURFACE MOUNT		PAGE 1 OF 2



DOCUMENT	NUMBER:
98AON10527	7D

PAGE 2 OF 2

ISSUE	REVISION	DATE				
0	RELEASED FOR PRODUCTION. REQ. BY L. GAN	24 SEP 2001				
Α	ADDED STYLE 8. REQ. BY S. ALLEN.	06 AUG 2008				
В	ADDED STYLE 9. REQ. BY D. WARNER.	16 JAN 2009				
С	ADDED STYLE 10. REQ. BY S. ALLEN.	09 JUN 2009				
D	RELABELED DRAWING TO JEDEC STANDARDS. ADDED SIDE VIEW DETAIL A. CORRECTED MARKING INFORMATION. REQ. BY D. TRUHITTE.	29 JUN 2010				
E	ADDED ALTERNATE CONSTRUCTION BOTTOM VIEW. MODIFIED DIMENSIONS b2 AND L1. CORRECTED MARKING DIAGRAM FOR DISCRETE. REQ. BY I. CAMBALIZA.	06 FEB 2014				
F	ADDED SECOND ALTERNATE CONSTRUCTION BOTTOM VIEW. REQ. BY K. MUSTAFA.	21 JUL 2015				

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ON Semiconductor and the are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor and see no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ON Semiconductor:

MC78M05ABDTG MC78M05ABDTRKG MC78M05ABTG MC78M05ACDTG MC78M05ACDTRKG MC78M05ACTG

MC78M05BDTG MC78M05BDTRKG MC78M05BTG MC78M05CDTG MC78M05CDTRKG MC78M05CDTT5G

MC78M05CTG MC78M06BTG MC78M08ABDTG MC78M08ABDTRKG MC78M08ABTG MC78M08ACDTG

MC78M08ACDTRKG MC78M08ACTG MC78M08BDTG MC78M08BDTRKG MC78M08BTG MC78M08CDTG

MC78M08CDTRKG MC78M08CTG MC78M09BDTG MC78M09BDTRKG MC78M09CDTG MC78M09CDTRKG

MC78M09CTG MC78M12ABDTG MC78M12ABDTRKG MC78M12ABTG MC78M12ACDTG MC78M12ACDTRKG

MC78M12ACTG MC78M12BDTG MC78M15ABDTRKG MC78M15ABTG MC78M15ACDTG MC78M15ACDTRKG

MC78M15CTG MC78M15BDTG MC78M15BDTRKG MC78M15BTG MC78M15CDTG MC78M15CDTRKG

MC78M15CTG MC78M18BTG MC78M18CDTG MC78M18CDTRKG MC78M18CTG MC78M20CTG MC78M24BTG

MC78M24CTG MC78M18BTG MC78M15BDTG MC78M15BDTRKG MC78M18CDTRKG MC78M16CTG MC78M20CTG MC78M24BTG

MC78M24CTG MC78M18BTG MC78M15BDTG MC78M15BDTRKG MC78M15BDTRKG MC78M15CDTRKG MC78M20CTG MC78M24BTG

MC78M06BDTRKG MC78M12CDTT5G MC78M15CDTT5G MC78M05BDTT5G NCV78M15BDTRKG

NCV78M09BDTRKG NCP78M12CTG