

RFCOMM Micro App Design

RFCOMM Micro App Design:

- RFCOMM Micro App shall be designed as single endpoint supporting one RFCOMM_SERVER_SOCKET and one RFCOMM_CLIENT_SOCKET
- Data to be stored on RFCOMM Micro App
 - EndpointID
 - List of SockeInfo
 - SocketId or ConnId
 - remote_mtu
 - Display Integration info??


RFCOMM APP Interfaces

Interface	Parameter	Remarks
App_Register	EndPoint_Id, AppMgr_CB	MicroApp → AppMgr → Q6 Need to invoke during boot time
RFCOMM_SOCKET_OPENED	EndPoint_Id, connId or socketId remote_mtu profile_type	Q6 → AppMgr → MicroApp
RFCOMM_App_Socket_Open_Cfm	EndPoint_Id, connId or socketId status	MicroApp → AppMgr → Q6 This will be handled within APP_Mgr
RFCOMM_SOCKET_CLOSED	EndPoint_Id, connId or socketId reason??	Q6 → AppMgr → MicroApp No response required

RFCOMM_SOCKET_DATA_IND	Endpoint_Id connId or socketId data_len, data	Q6 → AppMgr → MicroApp QAPI Event needed
RFCOMM_Socket_Data_Ind_Resp	Endpoint_Id connId or socketId	MicroApp → AppMgr → Q6
RFCOMM_Socket_Send_Data	Endpoint_Id connId or socketId data_len, data	MicroApp → AppMgr → Q6 QCLI option
RFCOMM_SOCKET_DATA_CFM	Endpoint_Id connId or socketId	Q6 → AppMgr → MicroApp
RFCOMM_APP_Close_Socket_Ind	connId or socketId Endpoint_Id (needed?) reason	Is this needed? MicroApp → AppMgr → Q6 QCLI option


RFCOMM Socket Open and Close MSC

- App Mgr Register Cfm - Success/Fail
- App_Register - called from platform_init or App_Mgr
- Can socket_context be send as context param in Synergy API (Roshan to check)
- Micro app qcli shall be enabled only after Socket is offloaded

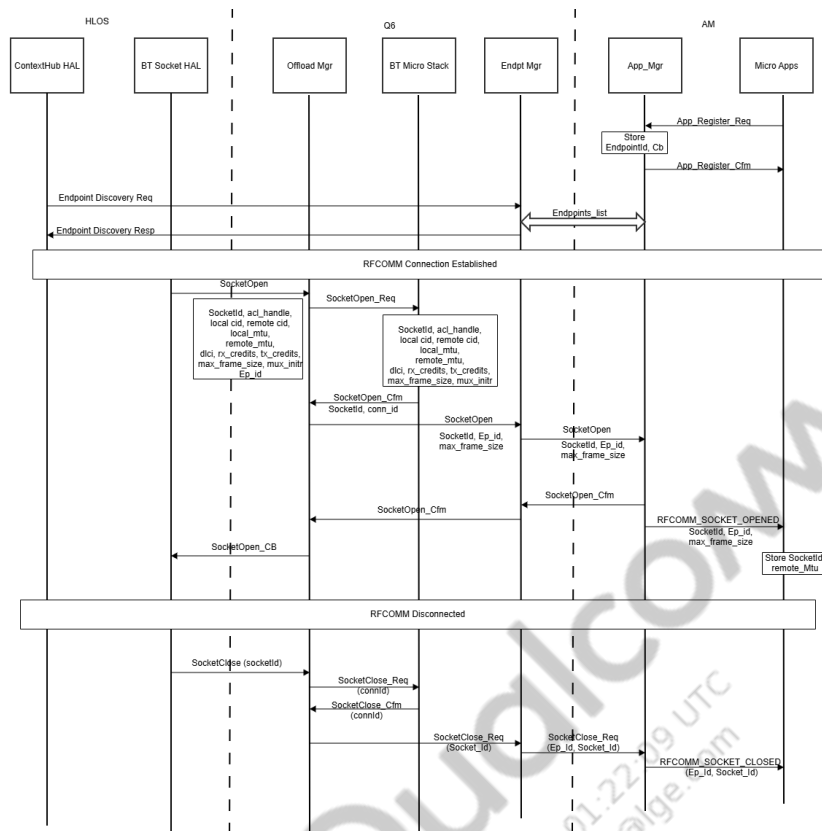

RFCOMM Socket Data Transfer Tx and Rx

- Synergy will not send next data packet until we send data_ind_resp for previous packet?
Check with Girish.

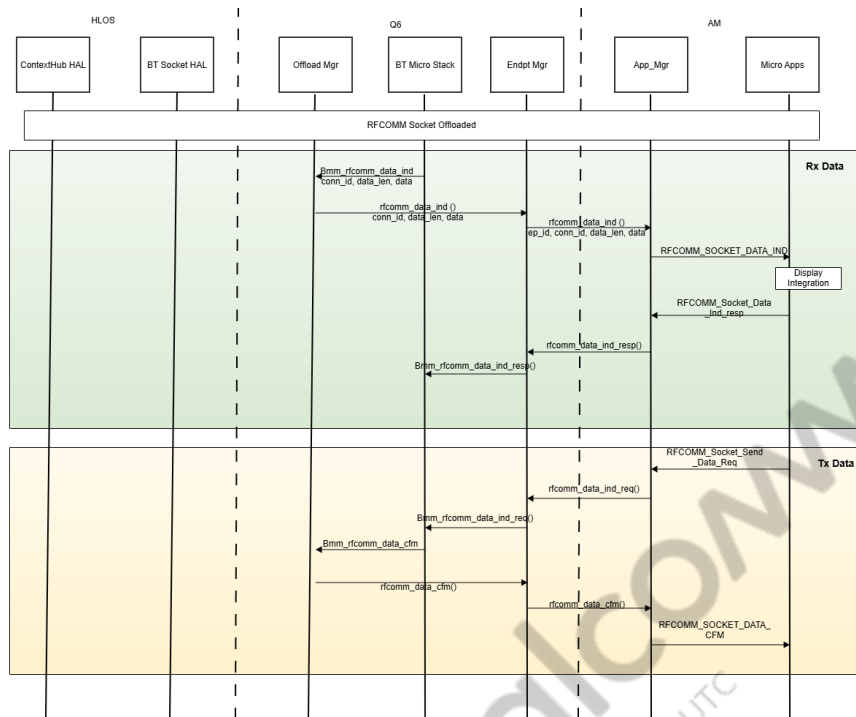

RFCOMM Micro App to HLOS App communication

- To send bd_name or any other info
- To send uuid