


Аппаратный генератор углов v0.01.
Техническое справочное руководство.

Suppression Filter Compare Register (HWASFCR)

Offset = 00h

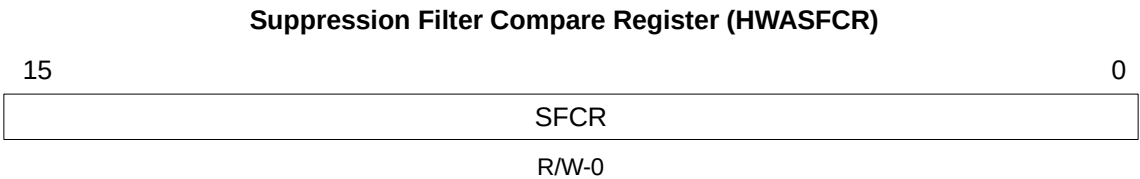

LEGEND: R/W = Read/Write; -n = value after reset

Bit	Field	Value	Description
15-0	SFCR		Counter Compare Value

Global Configuration Set Register 0 (HWAGCSR0)

Offset = 80h

Global Configuration Set Register 0 (HWAGCSR0)

7	6	5	4	3	2	1	0
					SFLTE	EDGES	CAPE
R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0

LEGEND: R/W = Read/Write; -n = value after reset

Bit	Field	Value	Description
2	SFLTE	0 1	Suppression Filter Enable. Read: Suppression Filter is disabled. Write: Writes have no effect. Read: Suppression Filter is enabled. Write: Suppression Filter is enabled.
1	EDGES	0 1	Edge Select. Read: Rise edge selected. Write: Writes have no effect. Read: Fall edge selected. Write: Fall edge selected.
0	CAPE	0 1	Capture Enable. Read: Capture disabled. Write: Writes have no effect. Read: Capture enabled. Write: Capture enabled.

Global Configuration Clear Register 0 (HWAGCCR0)

Offset = 82h

Global Configuration Clear Register 0 (HWAGCCR0)

--	--	--	--	--	--	--	--

7	6	5	4	3	2	1	0
					SFLTE	EDGES	CAPE
R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0

LEGEND: R/W = Read/Write; -n = value after reset

Bit	Field	Value	Description
2	SFLTE	0 1	Suppression Filter Enable. Read: Suppression Filter is disabled. Write: Writes have no effect. Read: Suppression Filter is enabled. Write: Suppression Filter is disabled.
1	EDGES	0 1	Edge Select. Read: Rise edge selected. Write: Writes have no effect. Read: Fall edge selected. Write: Rise edge selected.
0	CAPE	0 1	Capture Enable. Read: Capture disabled. Write: Writes have no effect. Read: Capture enabled. Write: Capture disabled.

Interrupt Enable Set Register (HWAIESR)

Offset = 84h

Interrupt Enable Set Register (HWAIESR)

7	6	5	4	3	2	1	0
						POVFIE	CAPIE
R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0

LEGEND: R/W = Read/Write; -n = value after reset

Bit	Field	Value	Description
2		0 1	Read: Write: Writes have no effect. Read: Write:
1	POVFIE	0 1	Period counter overflow interrupt enable. Read: Period counter overflow interrupt disabled. Write: Writes have no effect. Read: Period counter overflow interrupt enabled. Write: Period counter overflow interrupt enabled.
0	CAPIE	0 1	Capture Interrupt Enable. Read: Capture Interrupt disabled. Write: Writes have no effect. Read: Capture Interrupt enabled. Write: Capture Interrupt enabled.

Interrupt Enable Clear Register (HWAIECR)

Offset = 86h

Interrupt Enable Clear Register (HWAIECR)



LEGEND: R/W = Read/Write; -n = value after reset

Bit	Field	Value	Description
2		0 1	Read: Write: Writes have no effect. Read: Write:
1	POVFIE	0 1	Period counter overflow interrupt enable. Read: Period counter overflow interrupt disabled. Write: Writes have no effect. Read: Period counter overflow interrupt enabled. Write: Period counter overflow interrupt disabled.
0	CAPIE	0 1	Capture Interrupt Enable. Read: Capture Interrupt disabled. Write: Writes have no effect. Read: Capture Interrupt enabled. Write: Capture Interrupt disabled.

Interrupt Flag Register (HWAIFR)

Offset = 88h

Interrupt Flag Register (HWAIFR)

7	6	5	4	3	2	1	0
						POVFIF	CAPIF
R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0	R/W-0


LEGEND: R/W = Read/Write; -n = value after reset

Bit	Field	Value	Description
2		0 1	Read: Write: Writes have no effect. Read: Write:
1	POVFIF	0 1	Period counter Overflow Interrupt Flag. Read: No interrupt is pending. Write: Writes have no effect. Read: Period counter Overflow Interrupt is pending. Write: Clear Period counter Overflow Interrupt Flag.
0	CAPIF	0 1	Capture Interrupt Flag. Read: No interrupt is pending. Write: Writes have no effect. Read: Capture Interrupt is pending. Write: Clear capture interrupt flag.

HWAG Previous Tooth Period Value Register (HWAPCNT1)

Offset = 8Ah (15:0), Offset = 8Bh (31:16)

HWAG Previous Tooth Period Value Register (HWAPCNT1)

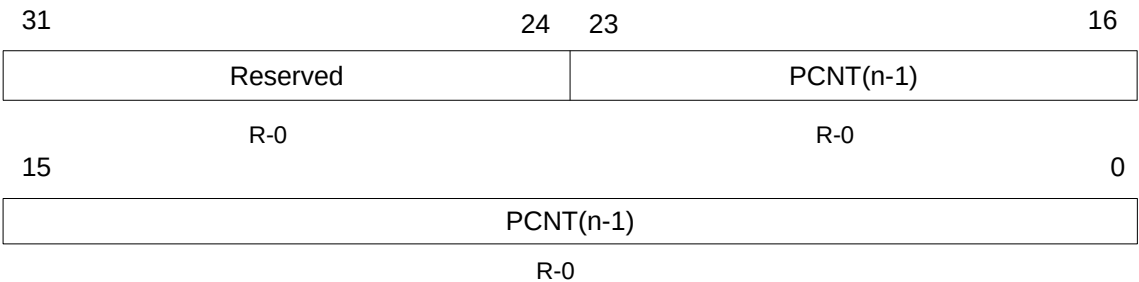

LEGEND: R = Read; -n = value after reset

Bit	Field	Value	Description
31-24	Reserved	0	Reads return 0.
23-0	PCNT(n-1)	0-FFFFFFh	Period (n-1) Value. Gives the period value of the previous tooth.