

应用电磁学基础・第8版

中英对照・章节总结复核修订版

在三轮复核修订版基础上，继续检查十个章节的总结与公式汇总页面。

本次修订8个总结页及1个正文页，恢复公式排版，补齐术语并校正矢量运算说明。

保留此前精校与局部修订；本次并非全书逐句精校或全部公式的独立推导。


对易误用公式补充必要条件，并依据BIPM资料校正SI基本单位相关表述。

左侧保留英文原书。逐页修改项目及验证结果见同目录章节总结复核记录。

部分其他页面仍可能存在机翻问题，不能将本版本视为正式审定译本。

FUNDAMENTALS OF APPLIED ELECTROMAGNETICS

Eighth Edition

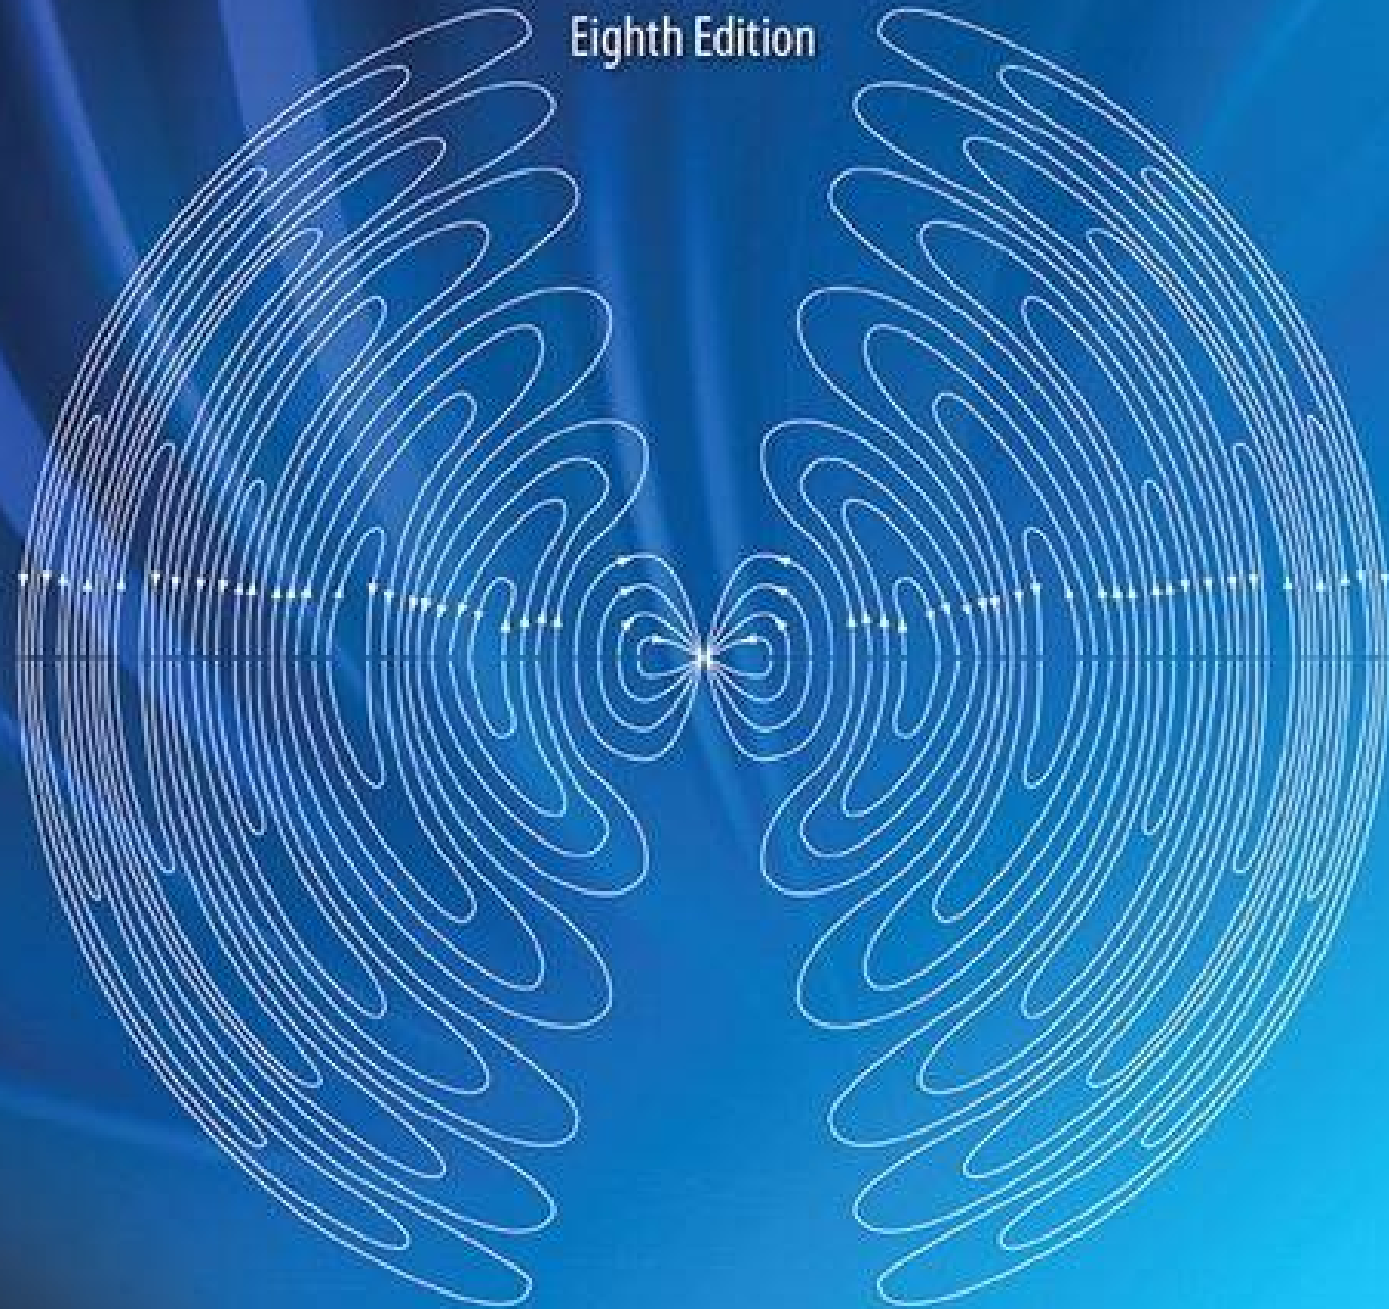


 Pearson

Fawwaz T. Ulaby | Umberto Ravaioli

FUNDAMENTALS OF APPLIED ELECTROMAGNETICS

Eighth Edition

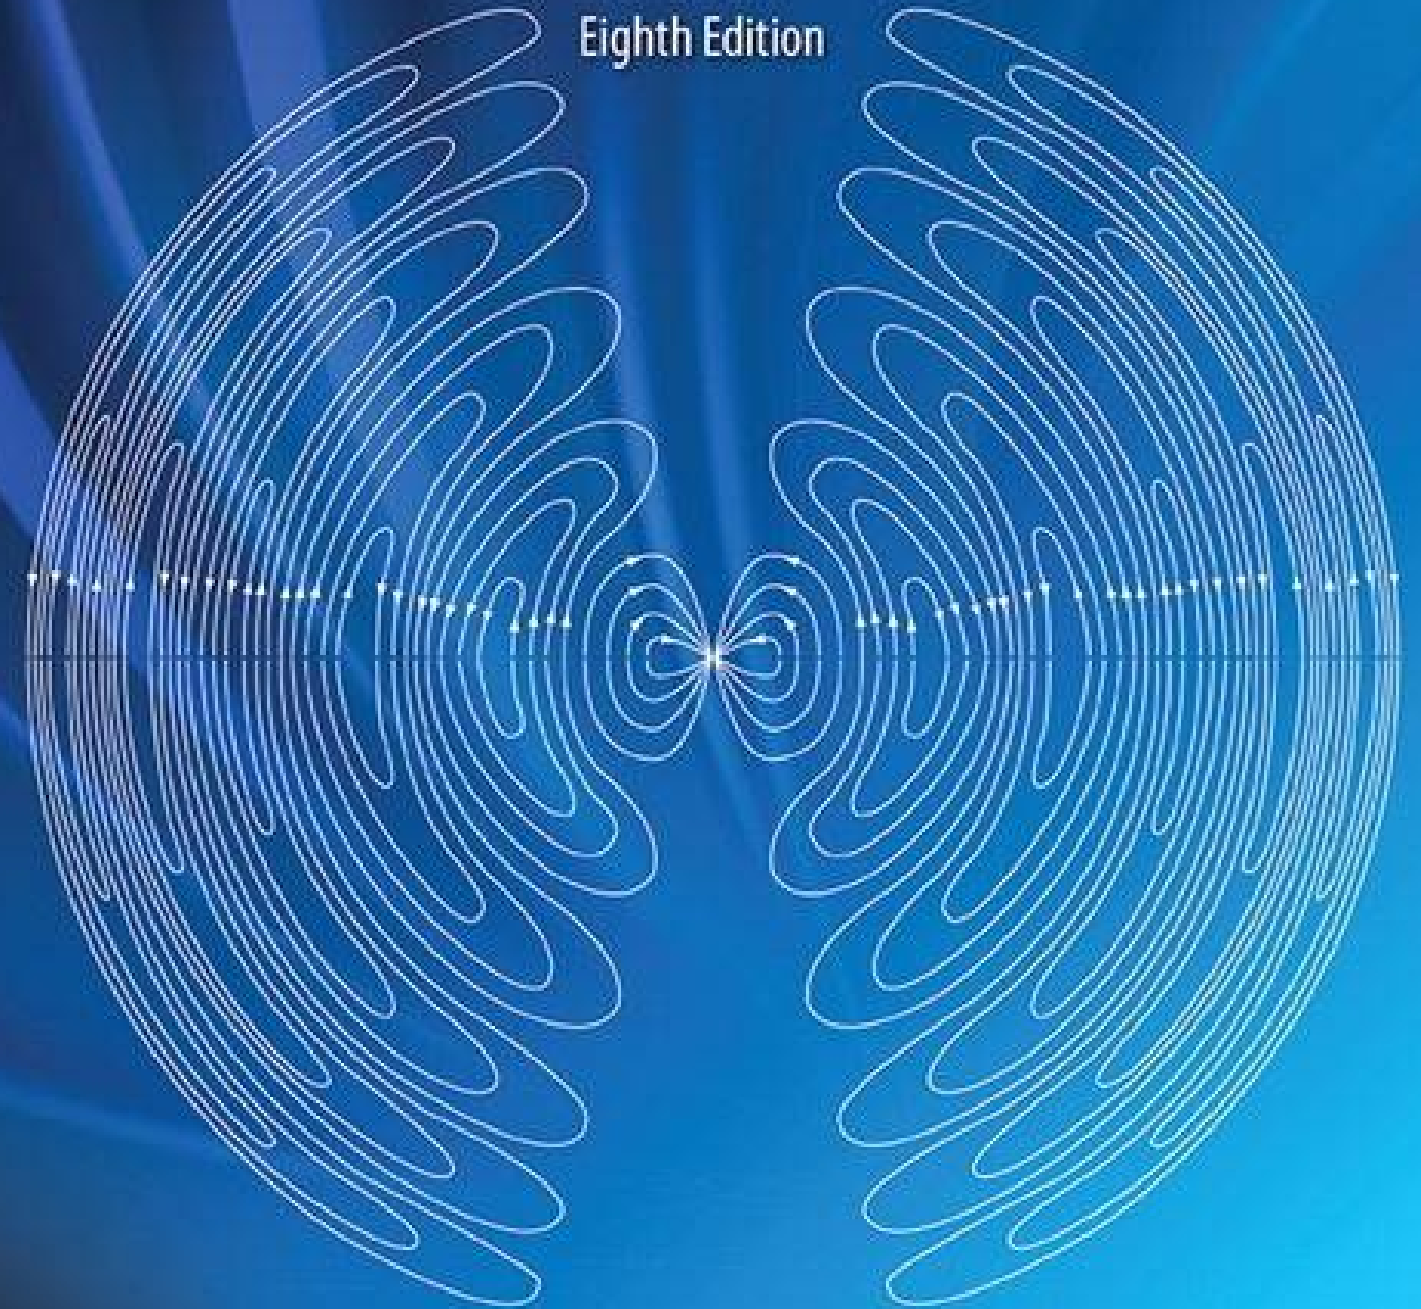

 Pearson

Fawwaz T. Ulaby | Umberto Ravaioli

*We dedicate this book to
Jean and Ann Lucia.*

*We dedicate this book to
Jean and Ann Lucia.*



Building on the core content and style of its predecessor, this eighth edition (8/e) of *Applied Electromagnetics* includes features designed to help students develop deep understanding of electromagnetic concepts and applications. Prominent among them is a set of 52 web-based simulation modules* that allow the user to interactively analyze and design transmission line circuits; generate spatial patterns of the electric and magnetic fields induced by charges and currents; visualize in 2-D and 3-D space how the gradient, divergence, and curl operate on spatial functions; observe the temporal and spatial waveforms of plane waves propagating in lossless and lossy media; calculate and display field distributions inside a rectangular waveguide; and generate radiation patterns for linear antennas and parabolic dishes. These are valuable learning tools; we encourage students to use them and urge instructors to incorporate them into their lecture materials and homework assignments.

Additionally, by enhancing the book’s graphs and illustrations and by expanding the scope of topics of the Technology Briefs, additional bridges between electromagnetic fundamentals and their countless engineering and scientific applications are established.

NEW TO THIS EDITION

- Additional exercises
- Updated Technology Briefs
- Enhanced figures and images
- New/updated end-of-chapter problems

* The interactive modules and Technology Briefs can be found at the book companion website: em8e.eecs.umich.edu.

ACKNOWLEDGMENTS

As authors, we were blessed to have worked on this book with the best team of professionals: Richard Carnes, Leland Pierce, Janice Richards, Rose Kernan, and Paul Mailhot. We are exceedingly grateful for their superb support and unwavering dedication to the project.

We enjoyed working on this book. We hope you enjoy learning from it.

FAWWAZ T. ULABY
UMBERTO RAVAIOLI

第 8 版前言

本书《应用电磁学基础》第 8 版继承了前版的核心内容与风格，并加入多项有助于学生深入理解电磁学概念及应用的学习资源。其中尤为突出的是一套包含 52 个模块的网络仿真工具*。借助这些模块，读者可以交互式地分析和设计传输线电路；生成电荷和电流所激发的电场与磁场的空间分布；在二维和三维空间中观察梯度、散度和旋度对空间函数的作用；观察平面波在无损和无损介质中传播时的时间与空间波形；计算并显示矩形波导内的场分布；以及生成线天线和抛物面天线的辐射方向图。

这些模块是很有价值的学习工具。我们鼓励学生使用它们，也建议教师将其纳入课堂讲授和课后作业。

此外，本版改进了图表和插图，并扩展了“技术简介”专栏的选题范围，以进一步联系电磁学基础知识及其广泛的工程和科学应用。

本版新增内容

- 新增练习
- 更新“技术简介”专栏
- 改进图表和插图
- 新增或修订章末习题

* 交互模块和技术简介可在配套网站 em8e.eecs.umich.edu 获取。

致谢

在本书的编写过程中，我们有幸与一支优秀的专业团队合作，其成员包括 Richard Carnes、Leland Pierce、Janice Richards、Rose Kernan 和 Paul Mailhot。我们衷心感谢他们出色的支持，以及对本项目始终如一的投入。

我们很享受编写本书的过程，也希望你能从学习本书中获得乐趣。

Fawwaz T. Ulaby
Umberto Ravaioli

CONTENT

This book begins by building a bridge between what should be familiar to a third-year electrical engineering student and the electromagnetics (EM) material covered in the book. Prior to enrolling in an EM course, a typical student will have taken one or more courses in circuits. He or she should be familiar with circuit analysis, Ohm’s law, Kirchhoff’s current and voltage laws, and related topics.

Transmission lines constitute a *natural* bridge between electric circuits and electromagnetics. Without having to deal with vectors or fields, the student will use already familiar concepts to learn about wave motion, the reflection and transmission of power, phasors, impedance matching, and many of the properties of wave propagation in a guided structure. All of these newly learned concepts will prove invaluable later (in Chapters 7 through 9) and will facilitate the learning of how plane waves propagate in free space and in material media. Transmission lines are covered in Chapter 2, which is preceded in Chapter 1 with reviews of complex numbers and phasor analysis.

The next part of this book, contained in Chapters 3 through 5, covers vector analysis, electrostatics, and magnetostatics. The electrostatics chapter begins with Maxwell’s equa-

tions for the time-varying case, which are then specialized to electrostatics and magnetostatics. These chapters will provide the student with an overall framework for what is to come and show him or her why electrostatics and magnetostatics are special cases of the more general time-varying case.

Chapter 6 deals with time-varying fields and sets the stage for the material in Chapters 7 through 9. Chapter 7 covers plane-wave propagation in dielectric and conducting media, and Chapter 8 covers reflection and transmission at discontinuous boundaries and introduces the student to fiber optics, waveguides, and resonators. In Chapter 9, the student is introduced to the principles of radiation by currents flowing in wires, such as dipoles, as well as to radiation by apertures, such as a horn antenna or an opening in an opaque screen illuminated by a light source.

To give the student a taste of the wide-ranging applications of electromagnetics in today’s technological society, Chapter 10 concludes this book with presentations of two system examples: satellite communication systems and radar sensors.

The material in this book was written for a two-semester sequence of six credits, but it is possible to trim it down to generate a syllabus for a one-semester, four-credit course. The accompanying table provides syllabi for each of these options.

Suggested Syllabi

	Two-Semester Syllabus		One-Semester Syllabus	
	6 credits (42 contact hours per semester)		4 credits (56 contact hours)	
Chapter	Sections	Hours	Sections	Hours
1 Introduction: Waves and Phasors	All	4	All	4
2 Transmission Lines	All	12	2-1 to 2-8 and 2-11	8
3 Vector Analysis	All	8	All	8
4 Electrostatics	All	8	4-1 to 4-10	6
5 Magnetostatics	All	7	5-1 to 5-5 and 5-7 to 5-8	5
Exams		3		2
	Total for first semester	42		
6 Maxwell’s Equations for Time-Varying Fields	All	6	6-1 to 6-3, and 6-6	3
7 Plane-Wave Propagation	All	7	7-1 to 7-4, and 7-6	6
8 Wave Reflection and Transmission	All	9	8-1 to 8-3, and 8-6	7
9 Radiation and Antennas	All	10	9-1 to 9-6	6
10 Satellite Communication Systems and Radar Sensors	All	5	None	—
Exams		3		1
	Total for second semester	40	Total	56
Extra Hours		2		0

内容安排与建议教学进度

本书首先在电气工程专业三年级学生应已熟悉的知识与电磁学内容之间建立联系。通常，学生在选修电磁学课程之前，已经学习过一门或多门电路课程，因此应熟悉电路分析、欧姆定律、基尔霍夫电流定律和电压定律等内容。

传输线是连接电路与电磁学的自然桥梁。学生暂时不必处理矢量或场，就可以运用熟悉的概念，学习波的运动、功率的反射与传输、相量、阻抗匹配，以及导波结构中的许多传播特性。这些概念将帮助学生理解第 7 至第 9 章中平面波在自由空间和材料介质中的传播。传输线安排在第 2 章，第 1 章则先复习复数与相量分析。

第 3 至第 5 章介绍矢量分析、静电学与静磁学。静电学一章从时变情况下的麦克斯韦方程组出发，再将其简化到静电场和静磁场。这样既建立了后续内容的总体框架，也说明静电学和静磁学是一般时变情况的特例。

第 6 章讨论时变场，为第 7 至第 9 章奠定基础。第 7 章介绍平面波在电介质和导电介质中的传播；第 8 章介绍波在不连续边界上的反射与透射，以及光纤、波导和谐振腔；第 9 章介绍导线电流的辐射，例如偶极子的辐射，以及口径辐射，例如喇叭天线或受光源照射的不透明屏上开口的辐射。

第 10 章通过卫星通信系统和雷达传感器两个系统实例，展示电磁学在当代技术社会中的广泛应用。

本书原按两学期、共 6 学分的课程编写，也可以删减为一学期、4 学分的课程。下面分别列出这两种课程的建议教学安排。

建议教学安排

章节	两学期：6 学分		一学期：4 学分	
	范围	学时	范围	学时
第1章 绪论：波与相量	全部	4	全部	4
第2章 传输线	全部	12	2-1 至 2-8； 2-11	8
第3章 矢量分析	全部	8	全部	8
第4章 静电学	全部	8	4-1 至 4-10	6
第5章 静磁学	全部	7	5-1 至 5-5； 5-7 至 5-8	5
考试		3		2
第一学期合计		42		
第6章 时变场的麦克斯韦方程组	全部	6	6-1 至 6-3； 6-6	3
第7章 平面波传播	全部	7	7-1 至 7-4； 7-6	6
第8章 波的反射与透射	全部	9	8-1 至 8-3； 8-6	7
第9章 辐射与天线	全部	10	9-1 至 9-6	6
第10章 卫星通信系统与雷达传感器	全部	5	不安排	-
考试		3		1
第二学期合计 / 单学期合计		40		56
机动学时		2		0

两学期方案每学期授课 42 学时；一学期方案共 56 学时。表中范围编号沿用原书。

MESSAGE TO THE STUDENT

The web-based interactive modules of this book were developed with you, the student, in mind. Take the time to use them in conjunction with the material in the textbook. The multiple-window feature of electronic displays makes it possible to design interactive modules with “help” buttons to guide you through the solution of a problem when needed. Video animations can show you how fields and waves propagate in time and space, how the beam of an antenna array can be made to scan electronically, and how current is induced in a circuit under the influence of a changing magnetic field. The modules are a useful resource for self-study. You can find them at the book companion website em8e.eecs.umich.edu. Use them!

BOOK COMPANION WEBSITE

Throughout the book, we use the symbol  to denote the book companion website em8e.eecs.umich.edu, which contains a wealth of information and tons of useful tools.

ACKNOWLEDGMENTS

Special thanks are due to our reviewers for their valuable comments and suggestions. They include Constantine Balanis of Arizona State University, Harold Mott of the University of Alabama, David Pozar of the University of Massachusetts, S. N. Prasad of Bradley University, Robert Bond of the New Mexico Institute of Technology, Mark Robinson of the University of Colorado at Colorado Springs, and Raj Mittra of the University of Illinois. I appreciate the dedicated efforts of the staff at Prentice Hall, and I am grateful for their help in shepherding this project through the publication process in a very timely manner.

FAWWAZ T. ULABY

MESSAGE TO THE STUDENT

致学生与配套资源

本书的网络交互模块是专门面向学生开发的。请结合教材内容，抽出时间使用这些模块。电子显示设备的多窗口功能，使模块可以设置“帮助”按钮，在需要时引导你逐步求解问题。视频动画能够展示场和波如何随时间与空间传播、如何通过电子方式扫描天线阵列的波束，以及变化的磁场如何在电路中感应出电流。这些模块也是很有用的自学资源，可通过本书配套网站 em8e.eecs.umich.edu 访问。请充分使用它们！


本书配套网站

本书用 EM 标志表示配套网站 em8e.eecs.umich.edu。网站提供丰富的学习资源和实用工具。

致谢

特别感谢审稿人提出的宝贵意见和建议。他们包括：亚利桑那州立大学的 Constantine Balanis、阿拉巴马大学的 Harold Mott、马萨诸塞大学的 David Pozar、布拉德利大学的 S. N. Prasad、新墨西哥矿业与技术学院的 Robert Bond、科罗拉多大学科罗拉多斯普林斯分校的 Mark Robinson，以及伊利诺伊大学的 Raj Mittra。我也感谢 Prentice Hall 出版社工作人员的辛勤努力，以及他们为本项目及时完成出版流程所提供的帮助。

Fawwaz T. Ulaby

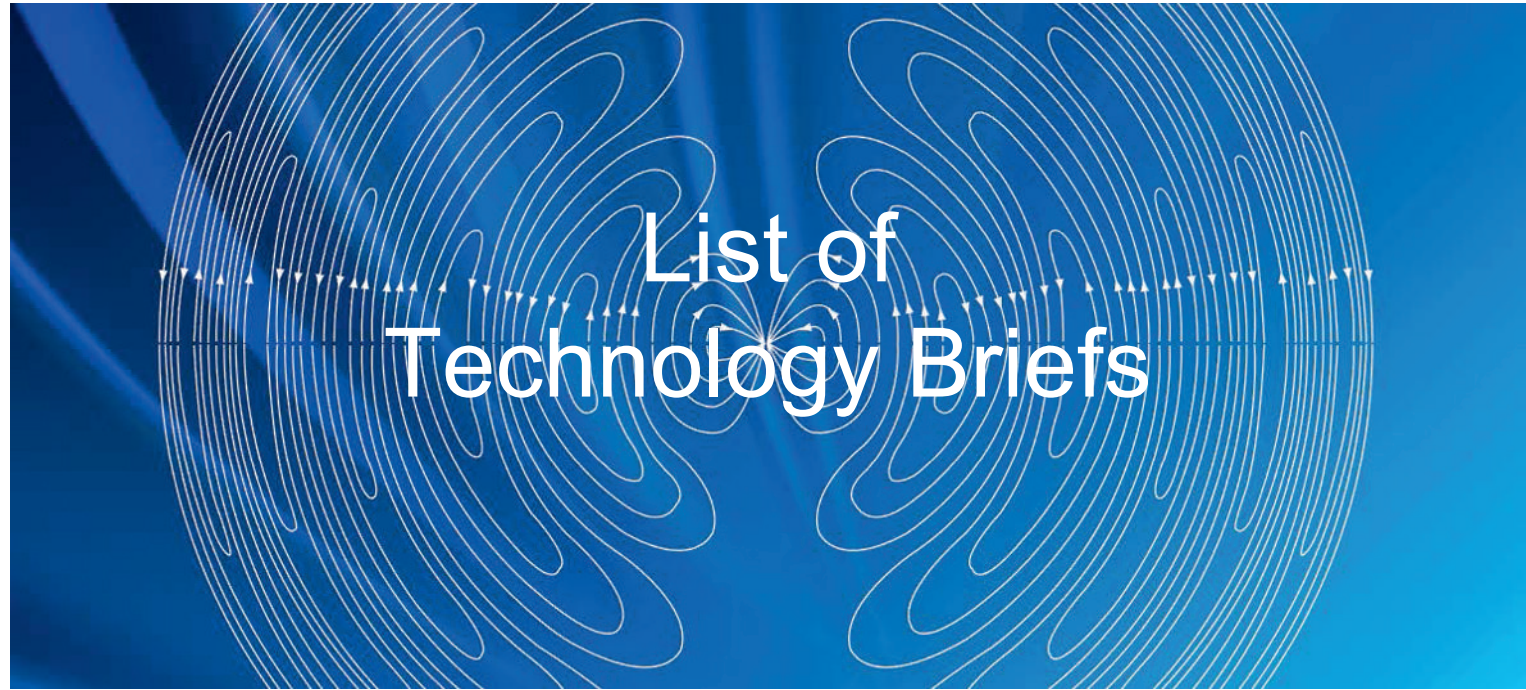

TB1	LED Lighting	18	TB10	Electromagnets	247
TB2	Solar Cells	35	TB11	Inductive Sensors	262
TB3	Microwave Ovens	80	TB12	EMF Sensors	290
TB4	EM Cancer Zappers	117	TB13	RFID Systems	313
TB5	Global Positioning System	151	TB14	Liquid Crystal Display (LCD)	320
TB6	X-Ray Computed Tomography	159	TB15	Lasers	347
TB7	Resistive Sensors	186	TB16	Bar-Code Readers	358
TB8	Supercapacitors as Batteries	191	TB17	Health Risks of EM Fields	405
TB9	Capacitive Sensors	203			

技术简介目录

TB 为 Technology Brief（技术简介）的缩写。页码沿用原书，可点击条目跳转。

TB1	LED 照明	18
TB2	太阳能电池	35
TB3	微波炉	80
TB4	电磁肿瘤消融	117
TB5	全球定位系统	151
TB6	X 射线计算机断层成像	159
TB7	电阻式传感器	186
TB8	用作电池的超级电容器	191
TB9	电容式传感器	203
TB10	电磁铁	247
TB11	电感式传感器	262
TB12	电动势传感器	290
TB13	射频识别系统 (RFID)	313
TB14	液晶显示器 (LCD)	320
TB15	激光器	347
TB16	条形码阅读器	358
TB17	电磁场的健康风险	405



Preface	iv
List of Technology Briefs	vii
List of Modules	xii
Photo Credits	xiii
1 Introduction: Waves and Phasors	1
1-1 Historical Timeline	3
1-2 Dimensions, Units, and Notation	11
1-3 The Nature of Electromagnetism	11
TB1 LED Lighting	18
1-4 Traveling Waves	22
1-5 The Electromagnetic Spectrum	30
1-6 Review of Complex Numbers	31
TB2 Solar Cells	35
1-7 Review of Phasors	38
2 Transmission Lines	46
2-1 General Considerations	47
2-2 Lumped-Element Model	50
2-3 Transmission-Line Equations	53
2-4 Wave Propagation on a Transmission Line	54
2-5 The Lossless Microstrip Line	59
2-6 The Lossless Transmission Line: General Considerations	62
2-7 Wave Impedance of the Lossless Line	71
2-8 Special Cases of the Lossless Line	74
TB3 Microwave Ovens	80
2-9 Power Flow on a Lossless Transmission Line	82
2-10 The Smith Chart	84
2-11 Impedance Matching	94
2-12 Transients on Transmission Lines	108

目录

编号	章节与主题	原书页码
	前言	iv
	技术简介目录	vii
	交互模块目录	xii
	图片来源	xiii
第 1 章	绪论：波与相量	1
1-1	历史沿革	3
1-2	量纲、单位与符号	11
1-3	电磁学的本质	11
TB1	LED 照明	18
1-4	行波	22
1-5	电磁频谱	30
1-6	复数复习	31
TB2	太阳能电池	35
1-7	相量复习	38
第 2 章	传输线	46
2-1	基本概念	47
2-2	集总元件模型	50
2-3	传输线方程	53
2-4	传输线上的波传播	54
2-5	无损微带线	59
2-6	无损传输线：基本性质	62
2-7	无损传输线的波阻抗	71
2-8	无损传输线的特殊情况	74
TB3	微波炉	80
2-9	无损传输线上的功率流	82
2-10	史密斯圆图	84
2-11	阻抗匹配	94
2-12	传输线的暂态过程	108

TB4	EM Cancer Zappers	117
3	Vector Analysis	130
3-1	Basic Laws of Vector Algebra	131
3-2	Orthogonal Coordinate Systems	137
3-3	Transformations between Coordinate Systems	143
3-4	Gradient of a Scalar Field	147
TB5	Global Positioning System	151
3-5	Divergence of a Vector Field	153
3-6	Curl of a Vector Field	157
TB6	X-Ray Computed Tomography	159
3-7	Laplacian Operator	162
4	Electrostatics	172
4-1	Maxwell’s Equations	173
4-2	Charge and Current Distributions	173
4-3	Coulomb’s Law	176
4-4	Gauss’s Law	180
4-5	Electric Scalar Potential	183
TB7	Resistive Sensors	186
4-6	Conductors	190
TB8	Supercapacitors as Batteries	191
4-7	Dielectrics	197
4-8	Electric Boundary Conditions	200
TB9	Capacitive Sensors	203
4-9	Capacitance	209
4-10	Electrostatic Potential Energy	213
4-11	Image Method	215
5	Magnetostatics	227
5-1	Magnetic Forces and Torques	228
5-2	The Biot–Savart Law	236
5-3	Maxwell’s Magnetostatic Equations	242
5-4	Vector Magnetic Potential	246
TB10	Electromagnets	247
5-5	Magnetic Properties of Materials	251
5-6	Magnetic Boundary Conditions	254
5-7	Inductance	256
5-8	Magnetic Energy	261
TB11	Inductive Sensors	262
6	Maxwell’s Equations for Time-Varying Fields	272
6-1	Faraday’s Law	273
6-2	Stationary Loop in a Time-Varying Magnetic Field	274
6-3	The Ideal Transformer	278

目录

编号	章节与主题	原书页码
TB4	电磁肿瘤消融	117
第 3 章	矢量分析	130
3-1	矢量代数的基本运算规律	131
3-2	正交坐标系	137
3-3	坐标系之间的变换	143
3-4	标量场的梯度	147
TB5	全球定位系统	151
3-5	矢量场的散度	153
3-6	矢量场的旋度	157
TB6	X 射线计算机断层成像	159
3-7	拉普拉斯算子	162
第 4 章	静电学	172
4-1	麦克斯韦方程组	173
4-2	电荷与电流分布	173
4-3	库仑定律	176
4-4	高斯定律	180
4-5	电标势	183
TB7	电阻式传感器	186
4-6	导体	190
TB8	用作电池的超级电容器	191
4-7	电介质	197
4-8	电场的边界条件	200
TB9	电容式传感器	203
4-9	电容	209
4-10	静电势能	213
4-11	镜像法	215
第 5 章	静磁学	227
5-1	磁力与磁力矩	228
5-2	毕奥-萨伐尔定律	236
5-3	麦克斯韦静磁场方程组	242
5-4	磁矢势	246
TB10	电磁铁	247
5-5	材料的磁性	251
5-6	磁场的边界条件	254
5-7	电感	256
5-8	磁能	261
TB11	电感式传感器	262
第 6 章	时变场的麦克斯韦方程组	272
6-1	法拉第定律	273
6-2	时变磁场中的静止回路	274
6-3	理想变压器	278

x	CONTENTS	
6-4	Moving Conductor in a Static Magnetic Field	279
6-5	The Electromagnetic Generator	283
6-6	Moving Conductor in a Time-Varying Magnetic Field	284
6-7	Displacement Current	285
6-8	Boundary Conditions for Electromagnetics	287
6-9	Charge–Current Continuity Relation	288
6-10	Free-Charge Dissipation in a Conductor	289
TB12	EMF Sensors	290
6-11	Electromagnetic Potentials	292
7	Plane-Wave Propagation	301
7-1	Time-Harmonic Fields	303
7-2	Plane-Wave Propagation in Lossless Media	304
7-3	Wave Polarization	309
TB13	RFID Systems	313
7-4	Plane-Wave Propagation in Lossy Media	317
TB14	Liquid Crystal Display (LCD)	320
7-5	Current Flow in a Good Conductor	325
7-6	Electromagnetic Power Density	328
8	Wave Reflection and Transmission	337
8-1	Wave Reflection and Transmission at Normal Incidence	338
TB15	Lasers	347
8-2	Snell’s Laws	349
8-3	Fiber Optics	351
8-4	Wave Reflection and Transmission at Oblique Incidence	353
TB16	Bar-Code Readers	358
8-5	Reflectivity and Transmissivity	361
8-6	Waveguides	364
8-7	General Relations for E and H	366
8-8	TM Modes in Rectangular Waveguide	367
8-9	TE Modes in Rectangular Waveguide	370
8-10	Propagation Velocities	371
8-11	Cavity Resonators	374
9	Radiation and Antennas	384
9-1	The Hertzian Dipole	387
9-2	Antenna Radiation Characteristics	390
9-3	Half-Wave Dipole Antenna	397
9-4	Dipole of Arbitrary Length	400
9-5	Effective Area of a Receiving Antenna	401
9-6	Friis Transmission Formula	403
TB17	Health Risks of EM Fields	405
9-7	Radiation by Large-Aperture Antennas	408


目录

编号	章节与主题	原书页码
6-4	静磁场中的运动导体	279
6-5	发电机	283
6-6	时变磁场中的运动导体	284
6-7	位移电流	285
6-8	电磁场的边界条件	287
6-9	电荷与电流的连续性关系	288
6-10	导体中自由电荷的消散	289
TB12	电动势传感器	290
6-11	电磁势	292
第 7 章	平面波传播	301
7-1	时谐场	303
7-2	无损介质中的平面波传播	304
7-3	波的极化	309
TB13	射频识别系统 (RFID)	313
7-4	有损介质中的平面波传播	317
TB14	液晶显示器 (LCD)	320
7-5	良导体中的电流	325
7-6	电磁功率密度	328
第 8 章	波的反射与透射	337
8-1	垂直入射时波的反射与透射	338
TB15	激光器	347
8-2	斯涅尔定律	349
8-3	光纤	351
8-4	斜入射时波的反射与透射	353
TB16	条形码阅读器	358
8-5	反射率与透射率	361
8-6	波导	364
8-7	E 与 H 的一般关系	366
8-8	矩形波导中的 TM 模	367
8-9	矩形波导中的 TE 模	370
8-10	传播速度	371
8-11	谐振腔	374
第 9 章	辐射与天线	384
9-1	赫兹偶极子	387
9-2	天线的辐射特性	390
9-3	半波偶极子天线	397
9-4	任意长度的偶极子	400
9-5	接收天线的有效面积	401
9-6	弗里斯传输公式	403
TB17	电磁场的健康风险	405
9-7	大口径天线的辐射	408

CONTENTS		xi
9-8	Rectangular Aperture with Uniform Aperture Distribution	410
9-9	Antenna Arrays	412
9-10	N-Element Array with Uniform Phase Distribution	419
9-11	Electronic Scanning of Arrays	421
10	Satellite Communication Systems and Radar Sensors	434
10-1	Satellite Communication Systems	435
10-2	Satellite Transponders	436
10-3	Communication-Link Power Budget	439
10-4	Antenna Beams	440
10-5	Radar Sensors	441
10-6	Target Detection	443
10-7	Doppler Radar	445
10-8	Monopulse Radar	447
Appendix A: Symbols, Quantities, and Units		451
Appendix B: Material Constants of Some Common Materials		454
Appendix C: Mathematical Formulas		457
Appendix D: Fundamental Constants and Units		460
Appendix E: Answers to Selected Problems		462
Bibliography		466
Index		468

目录

编号	章节与主题	原书页码
9-8	口径场均匀分布的矩形口径	410
9-9	天线阵列	412
9-10	相位均匀分布的 N 元阵列	419
9-11	阵列的电子扫描	421
第 10 章	卫星通信系统与雷达传感器	434
10-1	卫星通信系统	435
10-2	卫星转发器	436
10-3	通信链路的功率预算	439
10-4	天线波束	440
10-5	雷达传感器	441
10-6	目标检测	443
10-7	多普勒雷达	445
10-8	单脉冲雷达	447
附录 A	符号、物理量与单位	451
附录 B	常见材料的材料常数	454
附录 C	数学公式	457
附录 D	基本常数与单位	460
附录 E	部分习题答案	462
	参考文献	466
	索引	468

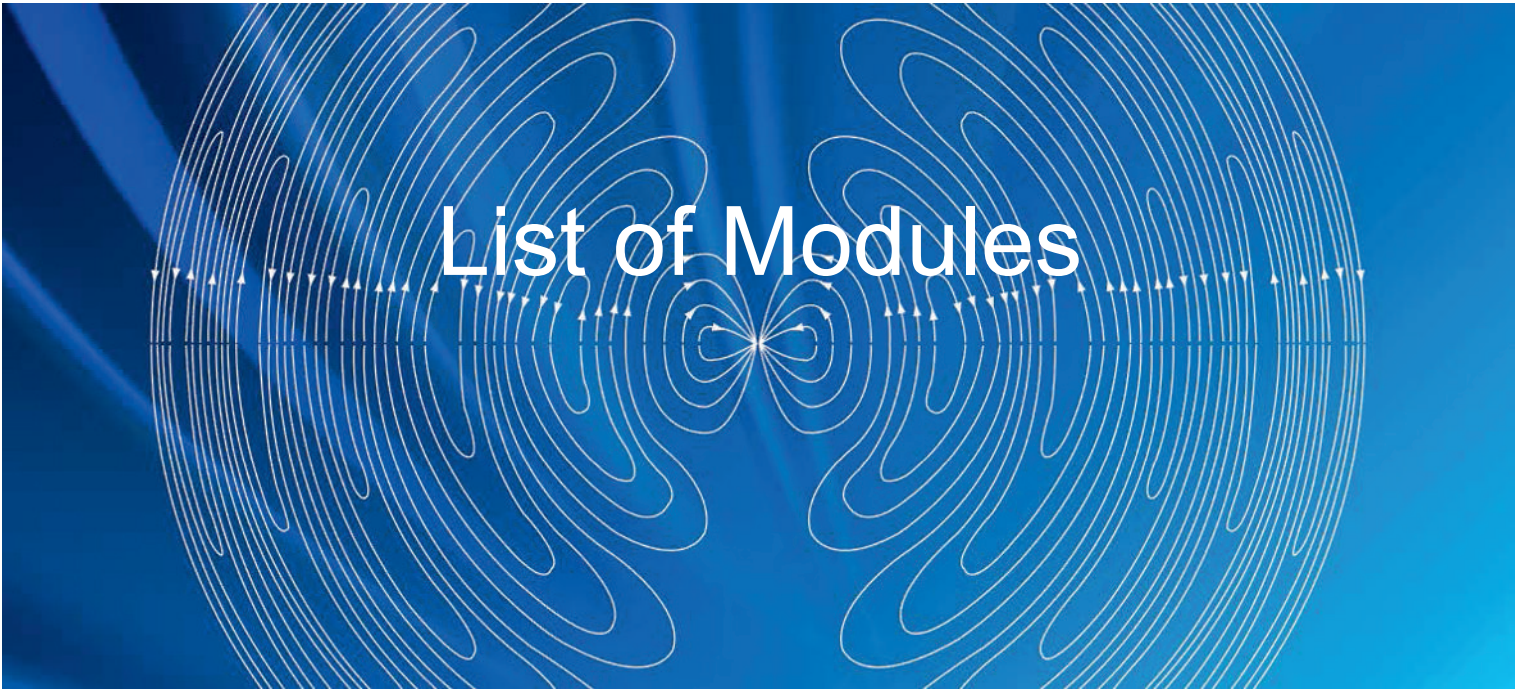


To access and exercise the following electronic modules, go to em8e.eecs.umich.edu.

1.1	Sinusoidal Waveforms	27	6.1	Circular Loop in Time-Varying Magnetic Field	277
1.2	Traveling Waves	29	6.2	Rotating Wire Loop in Constant Magnetic Field	282
1.3	Phase Lead/Lag	33	6.3	Displacement Current	287
2.1	Two-Wire Line	56	7.1	Linking E to H	308
2.2	Coaxial Line	57	7.2	Plane Wave	310
2.3	Lossless Microstrip Line	61	7.3	Polarization I	317
2.4	Transmission Line Simulator	70	7.4	Polarization II	318
2.5	Wave and Input Impedance	74	7.5	Wave Attenuation	324
2.6	Interactive Smith Chart	96	7.6	Current in a Conductor	327
2.7	Quarter-Wavelength Transformer	106	8.1	Incidence on Perfect Conductor	346
2.8	Discrete Element Matching	107	8.2	Multimode Step-Index Optical Fiber	353
2.9	Single-Stub Tuning	108	8.3	Oblique Incidence	363
2.10	Transient Response	116	8.4	Oblique Incidence in Lossy Medium	364
3.1	Points and Vectors	141	8.5	Rectangular Waveguide	376
3.2	Gradient	150	9.1	Hertzian Dipole	391
3.3	Divergence	156	9.2	Linear Dipole Antenna	401
3.4	Curl	162	9.3	Detailed Analysis of Linear Antenna	402
4.1	Fields Due to Charges	195	9.4	Large Parabolic Reflector	413
4.2	Charges in Adjacent Dielectrics	208	9.5	Two-Dipole Array	417
4.3	Charges above a Conducting Plane	210	9.6	Detailed Analysis of Two-Dipole Array	418
4.4	Charges near a Conducting Sphere	211	9.7	<i>N</i> -Element Array	422
5.1	Electron Motion in Static Fields	231	9.8	Uniform Dipole Array	425
5.2	Magnetic Fields Due to Line Sources	235			
5.3	Magnetic Field of a Current Loop	239			
5.4	Magnetic Forces between Two Parallel Conductors	241			

交互模块目录

模块入口：em8e.eecs.umich.edu。下列编号和页码均沿用原书，点击条目可跳转到对应页面。

第 1 章 • 波与相量			第 6 章 • 时变场		
1.1	正弦波形	27	6.1	时变磁场中的圆形回路	277
1.2	行波	29	6.2	恒定磁场中的旋转导线回路	282
1.3	相位超前与滞后	33	6.3	位移电流	287
第 2 章 • 传输线			第 7 章 • 平面波		
2.1	双导线传输线	56	7.1	E 与 H 的关系	308
2.2	同轴传输线	57	7.2	平面波	310
2.3	无损微带线	61	7.3	极化 I	317
2.4	传输线仿真器	70	7.4	极化 II	318
2.5	波阻抗与输入阻抗	74	7.5	波的衰减	324
2.6	交互式史密斯圆图	96	7.6	导体中的电流	327
2.7	四分之一波长阻抗变换器	106	第 8 章 • 反射与透射		
2.8	分立元件匹配	107	8.1	入射到理想导体上的波	346
2.9	单短截线调谐	108	8.2	多模阶跃折射率光纤	353
2.10	暂态响应	116	8.3	斜入射	363
第 3 章 • 矢量分析			8.4	有损介质中的斜入射	364
3.1	点与矢量	141	8.5	矩形波导	376
3.2	梯度	150	第 9 章 • 天线		
3.3	散度	156	9.1	赫兹偶极子	391
3.4	旋度	162	9.2	线偶极子天线	401
第 4 章 • 静电学			9.3	线天线的详细分析	402
4.1	电荷产生的场	195	9.4	大型抛物面反射器	413
4.2	相邻电介质中的电荷	208	9.5	双偶极子阵列	417
4.3	导电平面上方的电荷	210	9.6	双偶极子阵列的详细分析	418
4.4	导电球附近的电荷	211	9.7	N 元阵列	422
第 5 章 • 静磁学			9.8	均匀偶极子阵列	425
5.1	静态场中的电子运动	231			
5.2	线源产生的磁场	235			
5.3	电流回路的磁场	239			
5.4	两根平行导体之间的磁力	241			

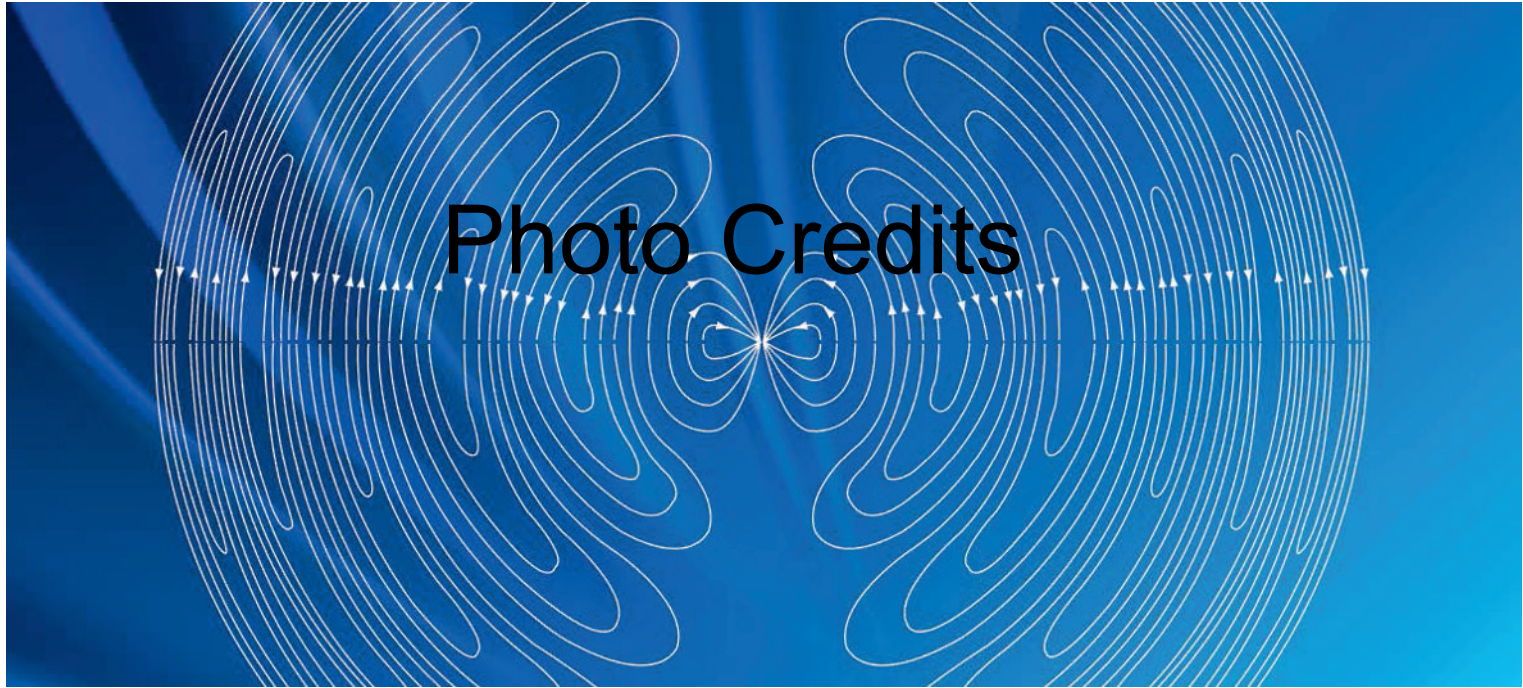

p. 4 (Ch 01-01A): Thales of Miletus (624–546 BC), Photo Researchers, Inc./Science Source

p. 4 (Ch 01-01B): Isaac Newton, World History Archive/Alamy Stock Photo

p. 4 (Ch 01-01C): Benjamin West, Benjamin Franklin Drawing Electricity from the Sky, Painting/Alamy Stock Photo

p. 4 (Ch 01-01D): Replica of the Voltaic pile invented by Alessandro Volta 1800, Gio.tto/Shutterstock

p. 4 (Ch 01-01E): Hans Christian Ørsted, Danish Physicist, New York Public Library/Science Source

p. 4 (Ch 01-01F): Andre-Marie Ampère, Nickolae/Fotolia

p. 5 (Ch 01-01G): Michael Faraday, Nicku/Shutterstock

p. 5 (Ch 01-01H): James Clerk Maxwell (1831–1879), Nicku/Shutterstock

p. 5 (Ch 01-01I): Heinrich Rudolf Hertz, New York Public Library/Science Source

p. 5 (Ch 01-01J): Nicola Tesla, NASA

p. 5 (Ch 01-01K): Early X-Ray of Hand, Science History Images/Alamy Stock Photo

p. 5 (Ch 01-01M): Albert Einstein, LOC/Science Source

p. 6 (Ch 01-02A): Telegraph, Morse apparatus, vintage engraved illustration, Morphart Creation/Shutterstock

p. 6 (Ch 01-02B): Thomas Alva Edison with his ‘Edison Effect’ Lamps, Education Images/Universal Images Group/Getty Images, Inc.

p. 6 (Ch 01-02C): Replica of an early type of telephone made by Scottish-born telephony pioneer Alexander Graham Bell (1847–1922), Science & Society Picture Library/Getty Images

p. 6 (Ch 01-02D): Guglielmo Marconi, Pach Brothers/Library of Congress Prints and Photographs Division [LC-USZ62-39702]

p. 6 (Ch 01-02E): De Forest seated at his invention, the radio-telephone, called the Audion, New York Public Library/Science Source

p. 6 (Ch 01-02F): The staff of KDKA broadcast reports of the 1920 presidential election, Bettmann/Getty Images

p. 7 (Ch 01-02G): This bottle-like object is a Cathode Ray tube which forms the receiver of the new style television invented by Dr. Vladimir Zworykin, Westinghouse research engineer, who is holding it, Album/Alamy Stock Photo

p. 7 (Ch 01-02H): Radar in operation in the Second World War, Library of Congress Department of Prints and Photographs [LC-USZ62-101012]

p. 7 (Ch 01-02I): Shockley, Brattain, and Bardeen with an apparatus used in the early investigations which led to the invention of the transistor, New York Public Library/Science Source

p. 7 (Ch 01-02J): A Photograph of Jack Kilby’s Model of the First Working Integrated Circuit Ever Built circa 1958, Fotosearch/Archive Photos/Getty Images

p. 7 (Ch 01-02K): Shown here is the 135-foot rigidized inflatable balloon satellite undergoing tensile stress test in a dirigible hanger at Weekesville, North Carolina, NASA

p. 7 (Ch 01-02L): Pathfinder on Mars, JPL/NASA

p. 8 (Ch 01-03A): Abacus isolated on white, Sikarin Supphatada/Shutterstock

p. 8 (Ch 01-03B): Pascaline; a mechanical calculator invented by Blaise Pascal in 1642, New York Public Library/Science Source

p. 8 (Ch 01-03C): Original Caption: Portrait of American electrical engineer Vannevar Bush, Bettmann/Getty Images

p. 8 (Ch 01-03D): J. Presper Eckert and John W. Mauchly, are pictured with the Electronic Numerical Integrator and Computer (ENIAC) in this undated photo from the University

p. 4 (第 01-01A 章)： 米利都的泰勒斯（公元前 624-546 年）， 摄影研究人员公司/科学来源， 第 4 页4 (第 01-01B 章)： 艾萨克·牛顿， 世界历史档案馆/Alamy Stock Photo 第 4 页4 (Ch 01-01C)： 本杰明·韦斯特， 本杰明·富兰克林从天上汲取电力， 绘画/Alamy Stock Photo p. 4 (Ch 01-01D)： Alessandro Volta 1800 年发明的伏打电堆的复制品， Gio.tto/Shutterstock 第 4 页。 4 (第 01-01E 章)： Hans Christian Ørsted， 丹麦物理学家， 纽约公共图书馆/科学来源， 第 4 页 4 (Ch 01-01F)： Andre-Marie Ampère， Nickolae/Fotolia p. 5 (第 01-01G 章)： Michael Faraday， Nicku/Shutterstock 第 14 页5 (第 01-01H 章)： 詹姆斯·克拉克·麦克斯韦 (James Clerk Maxwell) (1831–1879)， Nicku/Shutterstock

p. 5 (第 01-01I 章)： Heinrich Rudolf Hertz， 纽约公共图书馆/科学来源

p. 5 (第 01-01J 章)： 尼古拉·特斯拉， 美国宇航局

p. 5 (Ch 01-01K)： 早期手部 X 光片， 科学史图像/Alamy Stock Photo

p. 5 (第 01-01M 章)： 阿尔伯特·爱因斯坦， LOC/科学来源， 第 14 页6 (第 01-02A 章)： 电报、莫尔斯电报、复古雕刻插图、Morphart Creation/Shutterstock 第 6 页6 (第 01-02 B 章)： 托马斯·阿尔瓦·爱迪生和他的“爱迪生效应”灯， 教育图像/环球图像集团/盖蒂图片公司。 6 (第 01-02C 章)： 苏格兰出生的电话先驱亚历山大·格雷厄姆·贝尔 (Alexander Graham Bell， 1847-1922 年) 制造的早期电话的复制品， 科学与社会图片库/盖蒂图片社， 第 6 页。 6 (第 01-02D 章)： Guglielmo Marconi， Pach Brothers/美国国会图书馆版画和照片部门 [LC-USZ62-39702]

p. 6 (Ch 01-02E)： De Forest 坐在他的发明——无线电话前， 名为 Audion， 纽约公共图书馆/科学来源， 第 6 页。 6 (Ch 01-02F)： KDKA 的工作人员广播了 1920 年总统选举的报道， Bettmann/Getty Images p. 6。 7 (Ch 01-02G)： 这个瓶状物体是阴极射线管， 它构成了西屋公司研究工程师 Vladimir Zworykin 博士发明的新型电视的接收器， 他拿着它， 专辑/Alamy Stock Photo p.7 7 (第 01-02H 章)： 第二次世界大战中使用的雷达， 美国国会图书馆印刷品和照片部 [LC-USZ62-1010 12] 第 14 页7 (Ch 01-02I)： Shockley, Brattain 和 Bardeen 以及在早期研究中使用的设备， 该设备导致了晶体管的发明， 纽约公共图书馆/科学来源， 第 7 页。 7 (Ch 01-02J)： 杰克·基尔比 (Jack Kilby) 约 1958 年建造的第一个工作集成电路模型的照片， Fotosearch/Archive Photos/Getty Images 第 7 页。 7 (Ch 01-02K)： 此处显示的是 135 英尺长的刚性充气气球卫星， 正在 NASA 北卡罗来纳州威克斯维尔的飞船吊架中进行拉伸应力测试。 7 (第 01-02L 章)： 火星探路者， JPL/NASA 第 7 页8 (Ch 01-03A)： 白色算盘， Sikarin Supphatada/Shutterstock p. 8 (Ch 01-03A)： 白色算盘8 (Ch 01-03B)： 帕斯卡林； 布莱斯·帕斯卡 (Blaise Pascal) 于 1642 年发明的机械计算器， 纽约公共图书馆/科学来源， 第 11 页。 8 (第 01-03C 章)： 原始说明： 美国电气工程师 Vannevar Bush 的肖像， Bettmann/Getty Images 第 14 页8 (第 01-03D 章)： J. Presper Eckert 和 John W. Mauchly 在这张来自大学的未注明日期的照片中与电子数值积分器和计算机 (ENIAC) 合影

- p. 249 (TF10-5(a)): CHINA—JUNE 20: A maglev train awaits departure in Shanghai, China, on Saturday, June 20, 2009, Qilai Shen/Bloomberg/Getty Images

p. 249 (TF10-5(b) and (c)): Line Art: Magnetic trains—(b) internal workings of the Maglev train. Used with permission—Amy Mast, “Maglev trains are making history right now.” *Flux*, Volume 3, Issue 1, National High Magnetic Field Laboratory

p. 291 (TF12-2): Ultrasonic Transducer, NDT Resource

p. 313 (TF13-1): Jersey cow on pasture, Lakeview Images/Shutterstock

p. 314 (TF13-2): Line Art: How an RFID system works is illustrated through this EZ-Pass example: Tag. Source: Cary Wolinsky/Cavan Images/Alamy Stock Photo
- p. 347 (TF15-1(a)): Optical Computer Mouse, Satawat Anukul/123RF

p. 347 (TF15-1(b)): Laser eye surgery, Will & Deni McIntyre/Science Source

p. 347 (TF15-1(c)): Laser Star Guide, NASA

p. 405 (TF17-1(a)): Smiling woman using computer, Edbockstock/Fotolia

p. 405 (TF17-1(b)): Vector silhouette of Power lines and electric pylons, Ints Vikmanis/Alamy Stock Photo

p. 405 (TF17-1(c)): Telecommunications tower, Poliki/Fotolia

p. 414 (Fig. 9-25): The AN/FPS-85 Phased Array Radar Facility in the Florida panhandle, near the city of Freeport, NASA


- p. 249 (TF10-5(a)): 中国—6 月 20 日：2009 年 6 月 20 日星期六， 一列磁悬浮列车在中国上海等待出发， Qilai Shen/Bloomber g/Getty Images p. 11 249 (TF10-5 (b) 和 (c))： 线条艺术： 磁力列车 - (b) 磁悬浮列车的内部工作原理。经许可使用—— 艾米·马斯特， “磁悬浮列车正在创造历史。” 通量， 第 3 卷， 第 1 期， 国家强磁场实验室， 第 14 页。 291 (TF12-2)： 超声波 换能器， NDT 资源， 第 291 页313 (TF13-1)： 牧场上的泽西牛， Lakeview Images/Shutterstock 第 313 页314 (TF13-2)： 线条艺术 ： 通过此 EZ-Pass 示例说明 RFID 系统的工作原理： 标签。资料 来源： Cary Wolinsky/Cavan Images/Alamy Stock Photo
- p. 347 (TF15-1(a)): 光学电脑鼠标， Satawat Anuk ul/123RF

p. 347 (TF15-1(b)): 激光眼科手术， Will & De ni McIntyre/Science Source

p. 347 (TF15-1(c)): 激光星导仪， NASA

p. 405 (TF17-1(a)): 使用电脑的微笑女士， Edbo ckstock/Fotolia

p. 405 (TF17-1(b)): 输电线和电塔的矢量轮廓， Ints Vikmanis /Alamy Stock Photo p. 405 405 (TF17-1(c)): 电信塔， Poliki/Foto lia 页。 414 (图 9-25)： 美国宇航局弗里波特市附近佛罗里达 狭长地带的 AN/FPS-85 相控阵雷达设施

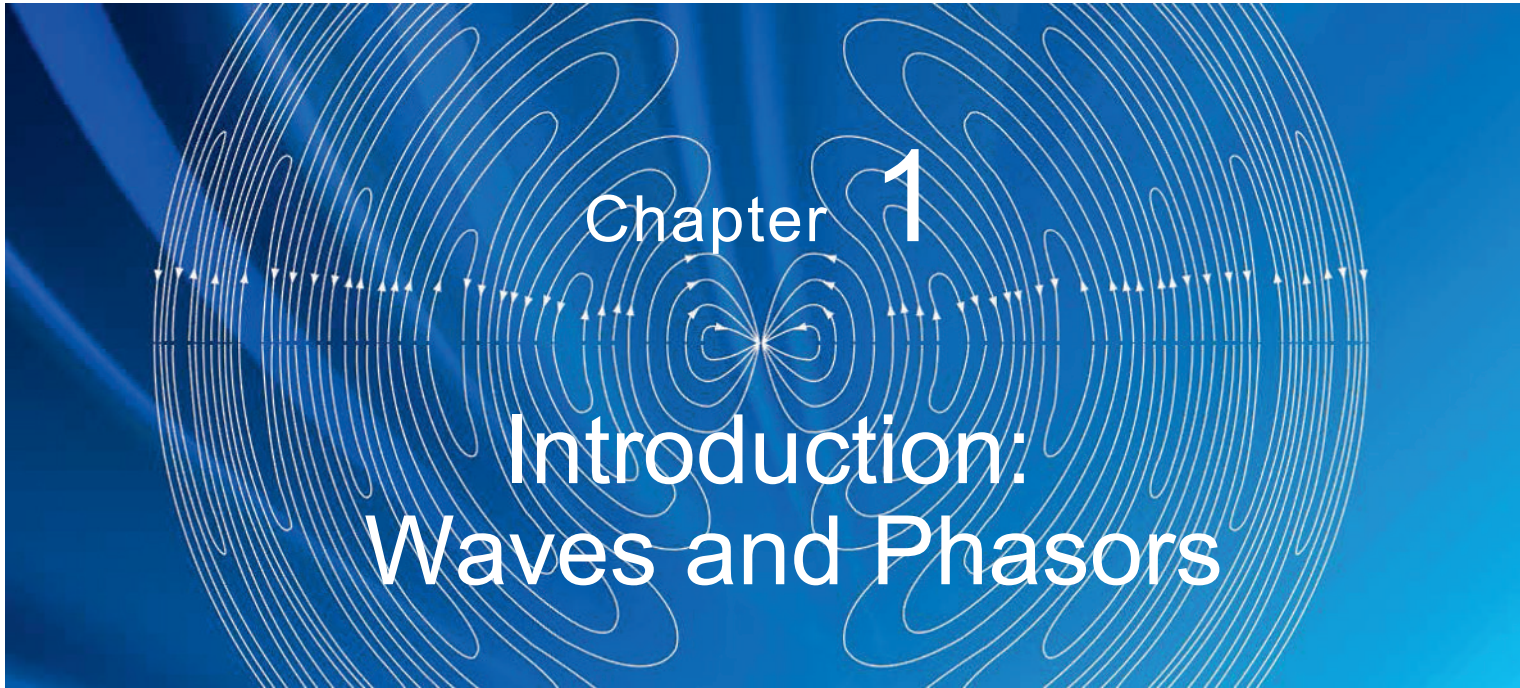

Chapter Contents

	Overview, 2
1-1	Historical Timeline, 3
1-2	Dimensions, Units, and Notation, 11
1-3	The Nature of Electromagnetism, 11
TB1	LED Lighting, 18
1-4	Traveling Waves, 22
1-5	The Electromagnetic Spectrum, 30
1-6	Review of Complex Numbers, 31
TB2	Solar Cells, 35
1-7	Review of Phasors, 38
	Chapter 1 Summary, 42
	Problems, 42

Objectives

- Upon learning the material presented in this chapter, you should be able to:
- 1. Describe the basic properties of electric and magnetic forces.
 - 2. Ascribe mathematical formulations to sinusoidal waves traveling in both lossless and lossy media.
 - 3. Apply complex algebra in rectangular and polar forms.
 - 4. Apply the phasor-domain technique to analyze circuits driven by sinusoidal sources.

绪论：波与相量

本章目录

	概述	2
1-1	历史沿革	3
1-2	量纲、单位与符号	11
1-3	电磁学的本质	11
TB1	LED 照明	18
1-4	行波	22
1-5	电磁频谱	30
1-6	复数复习	31
TB2	太阳能电池	35
1-7	相量复习	38
	本章小结	42
	习题	42

学习目标

学习本章后，你应该能够：

- 1. 描述电力与磁力的基本性质。
- 2. 用数学形式描述正弦波在无损和有损介质中的传播。
- 3. 运用直角坐标形式和极坐标形式的复数代数。
- 4. 应用相量域方法，分析由正弦信号源激励的电路。

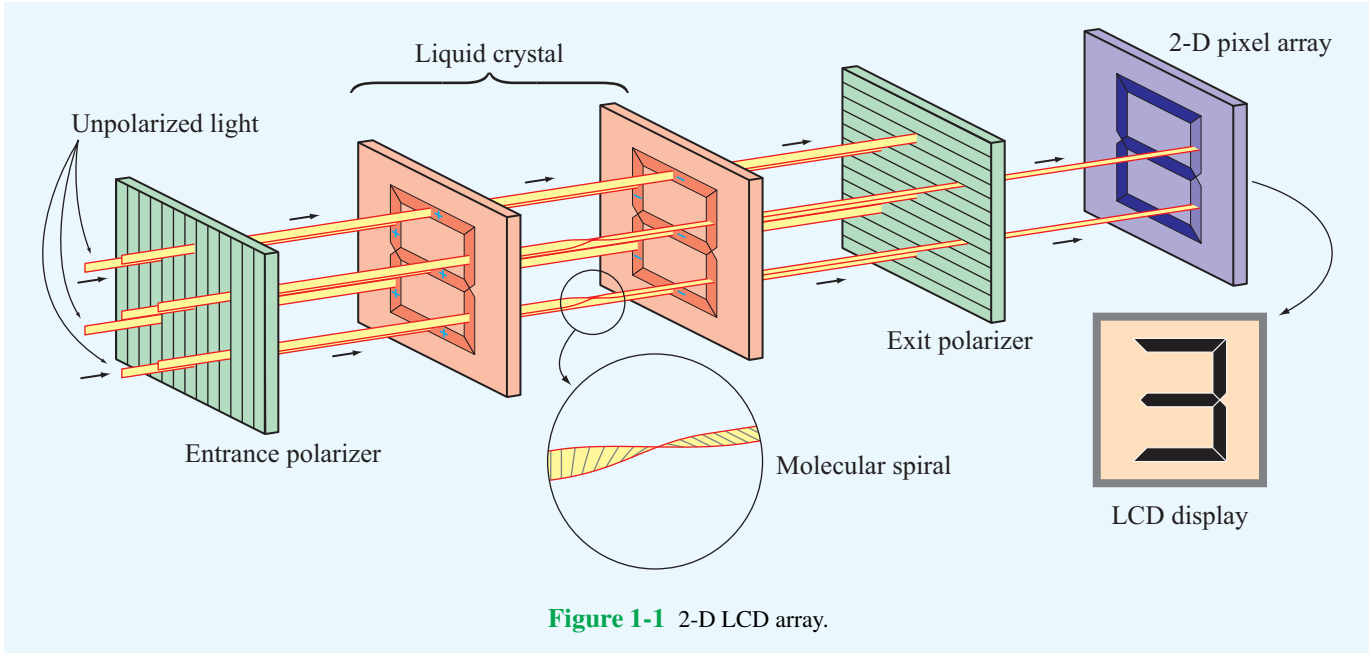


Figure 1-1 2-D LCD array.

Overview

Liquid crystal displays (LCDs) have become integral parts of many electronic consumer products, ranging from alarm clocks and cell phones to laptop computers and television systems. LCD technology relies on special electrical and optical properties of a class of materials known as **liquid crystals**, which are neither pure solids nor pure liquids but rather a hybrid of both. The molecular structure of these materials is such that when light travels through them, the polarization of the emerging light depends on whether or not a voltage exists across the material. Consequently, when no voltage is applied, the exit surface appears bright. Conversely, when a voltage of a certain level is applied across the LCD material, no light passes through it, resulting in a dark pixel. In-between voltages translate into a range of grey levels. By controlling the voltages across individual pixels in a two-dimensional array, a complete image can be displayed (Fig. 1-1). Color displays are composed of three subpixels with red, green, and blue filters.

► The polarization behavior of light in a LCD is a prime example of how electromagnetics is at the heart of electrical and computer engineering. ◀

The subject of this book is applied **electromagnetics (EM)**, which encompasses the study of both static and dynamic electric and magnetic phenomena and their engineering applications. Primary emphasis is placed on the fundamental properties of dynamic (time-varying) electromagnetic fields because of their greater relevance to practical applications, including wireless and optical communications, radar, bio-electromagnetics, and high-speed microelectronics. We study wave propagation in guided media, such as coaxial transmission lines, optical fibers, and waveguides; wave reflection and transmission at interfaces between dissimilar media; radiation by antennas, and several other related topics. The concluding chapter is intended to illustrate a few aspects of applied EM through an examination of design considerations associated with the use and operation of radar sensors and satellite communication systems.

We begin this chapter with a chronology of the history of electricity and magnetism. Next, we introduce the fundamental electric and magnetic field quantities of electromagnetics, as well as their relationships to each other and to the electric charges and currents that generate them. These relationships constitute the underpinnings of the study of electromagnetic phenomena. Then, in preparation for the material presented in Chapter 2, we provide short reviews of three topics: traveling waves, complex numbers, and phasors, which are all useful in solving time-harmonic problems.

概述

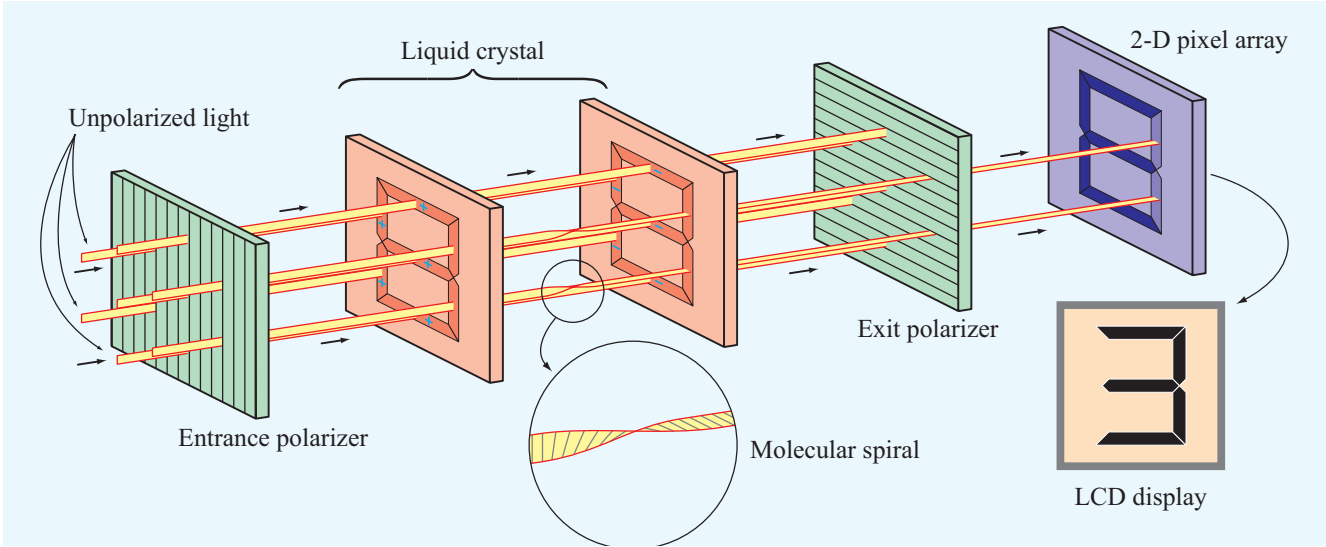


图 1-1 二维液晶显示阵列。

图中标注：非偏振光；入射偏振片；液晶；分子螺旋；出射偏振片；二维像素阵列；LCD 显示。

液晶显示器（LCD）已成为许多消费电子产品的重要组成部分，从闹钟、手机到笔记本电脑和电视系统，均可见其应用。液晶技术利用一类称为液晶的材料所具有的特殊电学和光学性质。这类材料既不是纯粹的固体，也不是纯粹的液体，而兼有两者的某些特点。其分子结构使得光穿过材料后，出射光的偏振状态取决于材料两端是否施加电压。

因此，未施加电压时，出射面呈亮态；施加一定电压后，光无法透过，像素呈暗态。介于两者之间的电压对应不同灰度。通过控制二维阵列中各像素的电压，就能显示完整图像，如图 1-1 所示。彩色显示的每个像素由分别带有红、绿、蓝滤光片的三个子像素组成。

液晶中光的偏振行为，是电磁学处于电气与计算机工程核心地位的一个典型例子。

本书研究应用电磁学（EM），内容包括静态与动态电、磁现象及其工程应用。重点讨论动态（时变）电磁场的基本性质，因为它们与无线和光通信、雷达、生物电磁学、高速微电子等实际应用关系更为密切。我们将学习同轴传输线、光纤和波导等导波介质中的波传播，不同介质分界面上的反射与透射，天线辐射及相关内容。最后一章通过雷达传感器和卫星通信系统的设计与运行，展示应用电磁学的若干实例。

本章先简述电与磁的发展历史，再介绍基本电磁场量，以及这些场量彼此之间、与产生它们的电荷和电流之间的关系。这些关系构成研究电磁现象的基础。随后，为第 2 章作准备，我们简要复习行波、复数与相量，这三项内容都适用于求解时谐问题。

1-1 Historical Timeline

The history of EM may be divided into two overlapping eras. The first is the *classical era*, during which the fundamental laws of electricity and magnetism were discovered and formulated. Building on these formulations, the *modern era* of the past 100 years ushered in the birth of the field of applied EM as we know it today.

1-1.1 EM in the Classical Era

Chronology 1-1 provides a timeline for the development of electromagnetic theory in the classical era. It highlights those discoveries and inventions that have impacted the historical development of EM in a very significant way, even though the selected discoveries represent only a small fraction of those responsible for our current understanding of electromagnetics. As we proceed through this book, some of the names highlighted in Chronology 1-1, such as those of Coulomb and Faraday, will appear again as we discuss the laws and formulations named after them.

The attractive force of magnetite was reported by the Greeks some 2800 years ago. It was also a Greek, *Thales of Miletus*, who first wrote about what we now call static electricity: He described how rubbing amber caused it to develop a force that could pick up light objects such as feathers. The term “*electric*” first appeared in print around 1600 in a treatise on the (electric) force generated by friction, authored by the physician to Queen Elizabeth I, *William Gilbert*.

About a century later, in 1733, *Charles-François du Fay* introduced the notion that electricity involves two types of “fluids,” one “positive” and the other “negative,” and that like-fluids repel and opposite-fluids attract. His notion of a fluid is what we today call electric charge. The invention of the capacitor in 1745, originally called the *Leyden jar*, made it possible to store significant amounts of electric charge in a single device. A few years later, in 1752, *Benjamin Franklin* demonstrated that lightning is a form of electricity. He transferred electric charge from a cloud to a Leyden jar via a silk kite flown in a thunderstorm. The collective eighteenth-century knowledge about electricity was integrated in 1785 by *Charles-Augustin de Coulomb*, in the form of a mathematical formulation characterizing the electrical force between two charges in terms of their strengths and polarities and the distance between them.

The year 1800 is noted for the development of the first electric battery by *Alessandro Volta*, and 1820 was a banner year for discoveries about how electric currents induce magnetism. This knowledge was put to good use by *Joseph Henry*, who developed one of the earliest electromagnets and dc (direct current) electric motors. Shortly thereafter, *Michael Faraday* built the first electric generator (the converse of the electric

motor). Faraday, in essence, demonstrated that a changing magnetic field induces an electric field (and hence a voltage). The converse relation, namely that a changing electric field induces a magnetic field, was first proposed by *James Clerk Maxwell* in 1864 and then incorporated into his four (now) famous equations in 1873.

► Maxwell’s equations represent the foundation of classical electromagnetic theory. ◀

Maxwell’s theory, which predicted the existence of electromagnetic waves, was not fully accepted by the scientific community at that time. It was later verified experimentally by means of radio waves by *Heinrich Hertz* in the 1880s. X-rays, another member of the EM family, were discovered in 1895 by *Wilhelm Röntgen*. In the same decade, *Nikola Tesla* was the first to develop the ac motor, which was considered a major advance over its predecessor, the dc motor.

Despite the advances made in the 19th century in our understanding of electricity and magnetism and how to put them to practical use, it was not until 1897 that the fundamental carrier of electric charge, the electron, was identified and its properties quantified by *Joseph Thomson*. The ability to eject electrons from a material by shining electromagnetic energy, such as light, on it is known as the *photoelectric effect*.

► To explain the photoelectric effect, *Albert Einstein* adopted the quantum concept of energy that had been advanced a few years earlier (1900) by *Max Planck*. Symbolically, this step represents the bridge between the classical and modern eras of electromagnetics. ◀

1-1.2 EM in the Modern Era

Electromagnetics play a role in the design and operation of every conceivable electronic device, including the diode, transistor, integrated circuit, laser, display screen, bar-code reader, cell phone, and microwave oven, to name but a few. Given the breadth and diversity of these applications (Fig. 1-2), it is far more difficult to construct a meaningful timeline for the modern era than for the classical era. That said, one can develop timelines for specific technologies and link their milestone innovations to EM. Chronologies 1-2 and 1-3 present timelines for the development of telecommunications and computers, technologies that have become integral parts of today’s societal infrastructure. Some of the entries in these chronologies refer to specific inventions, such as the telegraph, the transistor, and the laser. The operational principles and capabilities of some of these technologies are highlighted in

1-1 历史沿革

电磁学的历史可以分为两个相互交叠的时期。第一个是经典时期，电与磁的基本规律在这一时期被发现并形成数学表述。在此基础上，近百年的现代时期孕育了我们今天所认识的应用电磁学。

1-1.1 经典时期的电磁学

年表 1-1 概述了经典电磁理论的发展，重点列出对其历史进程产生重大影响的发现与发明。这些条目只是构成当今电磁学认识的诸多成果中的一小部分。书中介绍有关定律和公式时，库仑、法拉第等人物的名字还会再次出现。

约 2800 年前，希腊人已记录磁铁矿的吸引力。米利都的泰勒斯最早记述了今天所说的静电现象：琥珀经摩擦后能吸起羽毛等轻小物体。约 1600 年，英国女王伊丽莎白一世的御医威廉·吉尔伯特在讨论摩擦所产生电力的著作中，首次在印刷文献中使用 “electric” 一词。

1733 年，夏尔-弗朗索瓦·杜费提出电涉及 “正” “负” 两种流体，同种相斥、异种相吸；这种 “流体” 就是今天所说的电荷。1745 年发明的电容器最初称为莱顿瓶，使人们能在单个器件中储存较多电荷。1752 年，本杰明·富兰克林通过在雷雨中放飞丝绸风筝，将云中的电荷引入莱顿瓶，证明闪电是一种电现象。1785 年，夏尔-奥古斯丁·库仑将十八世纪的有关认识归纳为数学关系，用电荷量、极性及间距描述两个电荷之间的电力。

1800 年，亚历山德罗·伏打制成第一种电池。1820 年，人们在电流产生磁效应方面取得重要发现。约瑟夫·亨利据此研制出早期电磁铁和直流电动机。随后，迈克尔·法拉第制造出第一台发电机，其作用与电动机相反；他证明变化的磁场会产生电场，从而产生电压。詹姆斯·克拉克·麦克斯韦于 1864 年提出相反的关系，即变化的电场会产生磁场，并于 1873 年将其纳入著名的四个方程。

麦克斯韦方程组是经典电磁理论的基础。

麦克斯韦理论预言了电磁波的存在，但当时尚未被科学界充分接受。十九世纪八十年代，海因里希·赫兹通过无线电波实验验证了这一理论。1895 年，威廉·伦琴发现了电磁波家族的另一成员：X 射线。同一年代，尼古拉·特斯拉率先研制交流电动机，这被认为是相对直流电动机的重要进步。

尽管十九世纪对电与磁的理解及应用已取得重大进展，直到 1897 年，约瑟夫·汤姆孙才确认电子这一基本电荷载体，并定量研究其性质。用光等电磁能量照射材料而使电子逸出的现象，称为光电效应。

为解释光电效应，阿尔伯特·爱因斯坦采用了马克斯·普朗克于 1900 年提出的能量量子概念。象征性地说，这一步连接了电磁学的经典时期与现代时期。

1-1.2 现代时期的电磁学

电磁学参与几乎所有电子器件的设计与运行，例如二极管、晶体管、集成电路、激光器、显示屏、条形码阅读器、手机和微波炉。由于应用广泛且多样（见图 1-2），为现代时期编写一份有代表性的总年表比经典时期困难得多。不过，可以为具体技术编写年表，并将关键创新与电磁学联系起来。年表 1-2 和 1-3 分别介绍电信和计算机的发展；它们已成为现代社会基础设施的重要组成部分。条目中包含电报、晶体管、激光器等具体发明。本书穿插的 “技术简介” 专栏将介绍其中部分技术的工作原理和性能。

编排说明：末段最后一句接原书第 11 页开头，中文在此合并为完整句。

Chronology 1-1: TIMELINE FOR ELECTROMAGNETICS IN THE CLASSICAL ERA

Electromagnetics in the Classical Era

ca. 900 BC Legend has it that, while walking across a field in northern Greece, a shepherd named **Magnus** experiences a pull on the iron nails in his sandals by the black rock he is standing on. The region was later named **Magnesia** and the rock became known as **magnetite** [a form of iron with permanent magnetism].


ca. 600 BC Greek philosopher **Thales** describes how amber, after being rubbed with cat fur, can pick up feathers [static electricity].

ca. 1000 Magnetic compass used as a navigational device.



1600 **William Gilbert** (English) coins the term **electric** after the Greek word for amber (elektron), and observes that a compass needle points north–south because the Earth acts as a bar magnet.

1671 **Isaac Newton** (English) demonstrates that **white light** is a mixture of all the colors.

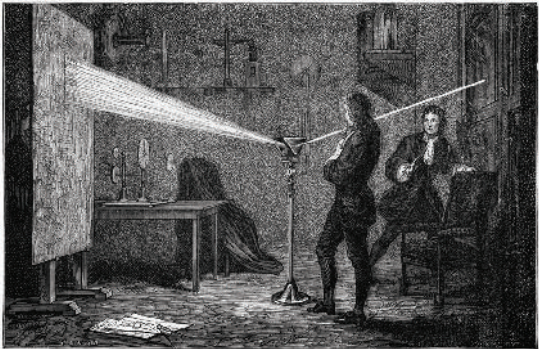

1733 **Charles-François du Fay** (French) discovers that **electric charges** are of two forms and that like charges repel and unlike charges attract.

1745 **Pieter van Musschenbroek** (Dutch) invents the Leyden jar, which was the first electrical **capacitor**.

1752 **Benjamin Franklin** (American) invents the **lightning rod** and demonstrates that lightning is electricity.



1785 **Charles-Augustin de Coulomb** (French) demonstrates that the electrical force between charges is proportional to the inverse of the square of the distance between them.



1800 **Alessandro Volta** (Italian) develops the first electric battery.



1820 **Hans Christian Oersted** (Danish) demonstrates the interconnection between electricity and magnetism through his discovery that an electric current in a wire causes a compass needle to orient itself perpendicular to the wire.

1820 **André-Marie Ampère** (French) notes that parallel currents in wires attract each other and opposite currents repel.



1820 **Jean-Baptiste Biot** (French) and **Félix Savart** (French) develop the Biot–Savart law relating the magnetic field induced by a wire segment to the current flowing through it.

年表 1-1：古典时代电磁学的时间表

古典时代的电磁学

约公元前900年 传说牧羊人马格努斯在希腊北部行走时，脚下黑色岩石吸住了凉鞋上的铁钉。该地区后来称为 **Magnesia**，这种具有天然磁性的岩石称为**磁铁矿**。


约公元前600年 希腊哲学家泰勒斯记述：琥珀经猫毛摩擦后能够吸起羽毛（静电现象）。



约 1000 用作导航设备的磁罗盘。

1600 年威廉·吉尔伯特（英国）根据希腊语中的琥珀（elektron）创造了“电”一词，并观察到罗盘指针指向南北，因为地球充当了条形磁铁。

1671年 英国科学家艾萨克·牛顿证明，白光是各种颜色光的混合。

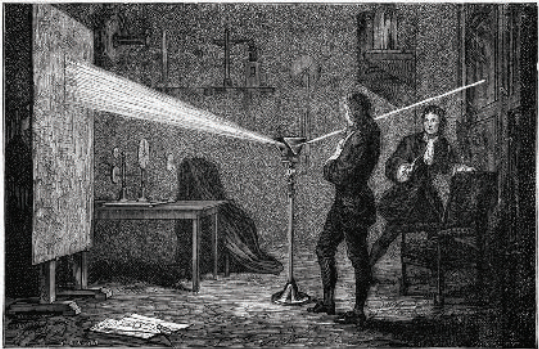

1733 年 Charles-François du Fay（法国）发现电荷有两种形式，同性电荷相斥，异性电荷相吸。

1745 Pieter van Musschenbroek（荷兰人）发明了莱顿瓶，这是第一个电容器。

1752年本杰明·富兰克林（美国人）发明了避雷针，并证明闪电就是电。



1785 Charles-Augustin de Coulomb（法国）证明，电荷之间的电力与它们之间的距离的平方成反比。



1800 亚历山德罗·沃尔塔（意大利人）开发出第一块电池。



1820 汉斯·克里斯蒂安·奥斯特（丹麦人）通过发现电线中的电流使罗盘针垂直于电线定向，证明了电和磁之间的相互联系。

1820 年 André-Marie Ampère（法国）指出，电线中的平行电流相互吸引，相反的电



1820 年 Jean-Baptiste Biot（法国）和 Félix Savart（法国）制定了 Biot-Savart 定律，将导线段感应的磁场与流过导线的电流联系起来。

Chronology 1-1: TIMELINE FOR ELECTROMAGNETICS IN THE CLASSICAL ERA (continued)

Electromagnetics in the Classical Era

- 1827

Georg Simon Ohm (German) formulates Ohm's law relating electric potential to current and resistance.
- 1827

Joseph Henry (American) introduces the concept of **inductance** and builds one of the earliest electric motors. He also assisted Samuel Morse in the development of the **telegraph**.
- 1831

Michael Faraday (English) discovers that a changing magnetic flux can induce an **electromotive force**.
- 1835


Carl Friedrich Gauss (German) formulates **Gauss's law** relating the electric flux flowing through an enclosed surface to the enclosed electric charge.

Gauss' Law for Electricity

$$\Phi_E = \oint \vec{E} \cdot d\vec{A} = \frac{q_{inside}}{\epsilon_0}$$
- 1873

James Clerk Maxwell (Scottish) publishes his *Treatise on Electricity and Magnetism*, in which he unites the discoveries of Coulomb, Oersted, Ampère, Faraday, and others into four elegantly constructed mathematical equations, now known as **Maxwell's Equations**.
- 1887

Heinrich Hertz (German) builds a system that can generate **electromagnetic waves** (at radio frequencies) and detect them.



1888

Nikola Tesla (American) invents the **ac** (alternating current) electric motor.

1895

Wilhelm Röntgen (German) discovers **X-rays**. One of his first X-ray images was of the bones in his wife's hands. [1901 Nobel prize in physics.]




1897

Joseph John Thomson (English) discovers the **electron** and measures its charge-to-mass ratio. [1906 Nobel prize in physics.]

1905

Albert Einstein (German-American) explains the **photoelectric effect** discovered earlier by Hertz in 1887. [1921 Nobel prize in physics.]



年表 1-1：古典时代电磁学的时间表（续）

古典时代的电磁学

1827

Georg Simon Ohm（德国）制定了将电势与电流和电阻联系起来的欧姆定律。

1827

Joseph Henry（美国人）引入了电感的概念并制造了最早的电动机之一。
他还协助塞缪尔·莫尔斯开发电报。

1831

迈克尔·法拉第（英语）发现变化的磁通量可以感应出电动势。

1835

卡尔·弗里德里希·高斯（德国）制定了高斯定律，将流过封闭表面的电通量与封闭的电荷联系起来。

Gauss' Law for Electricity

$$\Phi_E = \oint \vec{E} \cdot d\vec{A} = \frac{q_{inside}}{\epsilon_0}$$

1873


分段阅读 第 1873 章
（苏格兰）出版了他的《电和磁学论文》，其中他将库仑、奥斯特、安培、法拉第等人的发现统一到四个精心构造的数学方程中，现在称为麦克斯韦方程组。

1887

海因里希·赫兹（德国）建立了一个可以产生电磁波（射频）并检测它们的系统。

1888

尼古拉·特斯拉（美国人）发明了交流电动机。



1895

Wilhelm Röntgen（德国）发现 X 射线。他的第一张 X 射线图像是他妻子手中的骨头。[1901 年诺贝尔物理学奖。]



1897

约瑟夫·约翰·汤姆森（英语）发现了电子并测量了其荷质比。
。[1906 年诺贝尔物理学奖。]

1905

阿尔伯特·爱因斯坦（德裔美国人）解释了赫兹于 1887 年发现的光电效应。[1921 年诺贝尔物理学奖。]

