

W1209WK DC12V -50-110C W2809WK Digital Thermostat Temperature Control Sensor NTC



Detecting Temperature



Setting Temperature

Specifications:

Digital Output - Celsius / Fahrenheit

Temperature measurement range:-50°C 110°C

Temperature 0.1°C,other paragraph 1°C

Accuracy:0.1°C
Return difference accuracy:0.1°C
Refresh rate:0.5s
High temperature protection:0-110°C
The input voltage:DC12V
Measurement input:NTC (10K 0.5%) waterproof type sensor
Output:10 a relay all the way
Environmental requirements:-10°C,-60°C humidity 20%-85%
Size:48mm(length) x 29mm(width) x 32mm
Hole size:46 x 26.5mm

Connect the power supply and load can power the controller .

At this time, the red color is displayed as the measurement temperature, and the blue color (or red color) is displayed as the setting temperature.

Press STC (+) C / F (-) Set the required temperature, after setting wait for 3 seconds to automatically confirmation return.


At this time the controller according to the setting automatically execute relay on-off , the temperature controller output as 10A relay, meet all kinds of high power load, please ensure that the circuit is correct.

Package included:


1 X W2809WK/W1209WK Temperature Controller

1 X Temperature Sensor

Instructions/schematic are NOT included. We don't provide technical assistance please make sure that you are familiar with the product before purchasing.

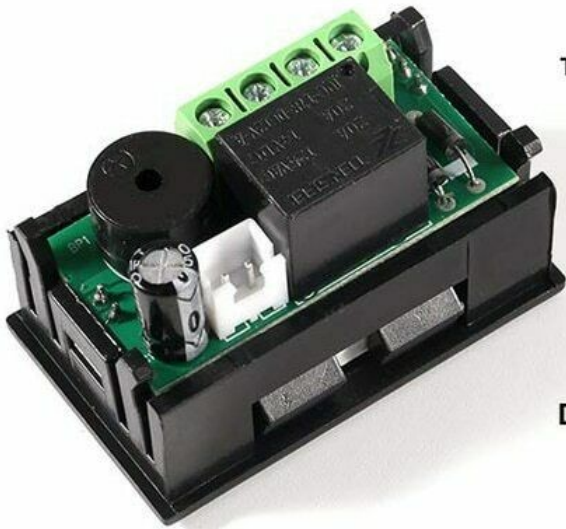

Temperature control and load the 12V cases wiring way

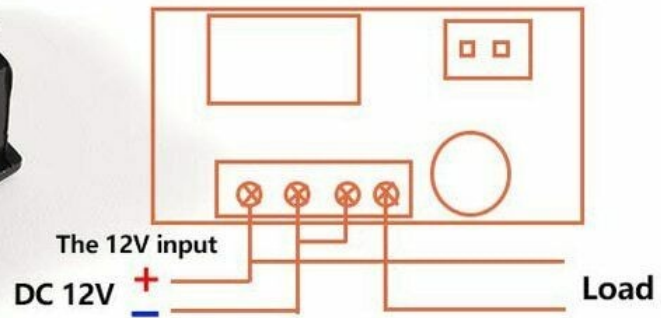

Load and temperature control different power wiring diagram

