
COLOR CODING FOR RESISTORS

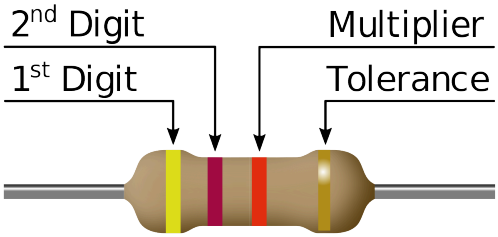

License CC BY-SA 4.0 www.picuino.com

- Calculate the missing colors and resistors in the following tables.
- In the last column, calculate the current that will flow through the resistor when connected to a 9 volt battery.
- All values should be written to 3 significant figures and the appropiate multiplier prefix (M=Mega, k=kilo, m=mili, µ=micro)


COLOR	VALUE	MULTIPLIER	TOLER-ANCE
BLACK	0	x 1	
BROWN	1	x 10	± 1%
RED	2	x 100	± 2%
ORANGE	3	x 1000	
YELLOW	4	x 10 000	
GREEN	5	x 100 000	
BLUE	6	x 1000 000	
VIOLET	7		
GREY	8		
WHITE	9		
GOLD		x 0.1	± 5%

COMMERCIAL SERIES E6: (5%)

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
4.7 MΩ					
	RED	RED	BLACK	GOLD	409 mA
15 Ω					
	ORANGE	ORANGE	GOLD	GOLD	2.73 A
10 kΩ					
	BROWN	GREEN	BROWN	GOLD	60.0 mA
220 Ω					
	YELLOW	VIOLET	BLACK	GOLD	192 mA
3.3 kΩ					
	RED	RED	RED	GOLD	4.09 mA

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
100 Ω					
	BLUE	GREY	BROWN	GOLD	13.2 mA
22 kΩ					
	BROWN	BLACK	YELLOW	GOLD	90.0 µA
1.0 Ω					
	BLUE	GREY	ORANGE	GOLD	132 µA
680 kΩ					
	ORANGE	ORANGE	GREEN	GOLD	2.73 µA
1.5 kΩ					
	YELLOW	VIOLET	RED	GOLD	1.91 mA
2.2 Ω					
	BROWN	BLACK	BLACK	GOLD	900 mA
2.2 MΩ					
	BROWN	GREEN	ORANGE	GOLD	600 µA
330 kΩ					
	RED	RED	YELLOW	GOLD	40.9 µA
4.7 Ω					
	BLUE	GREY	GREEN	GOLD	1.32 µA
470 Ω					
	BROWN	BLACK	RED	GOLD	9.00 mA
47 kΩ					
	BROWN	GREEN	GOLD	GOLD	6.00 A
33 Ω					
	BROWN	GREEN	GREEN	GOLD	6.00 µA
150 kΩ					
	BLUE	GREY	GOLD	GOLD	1.32 A
68 Ω					
	ORANGE	ORANGE	BROWN	GOLD	27.3 mA
1.0 MΩ					
	ORANGE	ORANGE	ORANGE	GOLD	273 µA
6.8 kΩ					
	YELLOW	VIOLET	YELLOW	GOLD	19.2 µA

COLOR CODING FOR RESISTORS

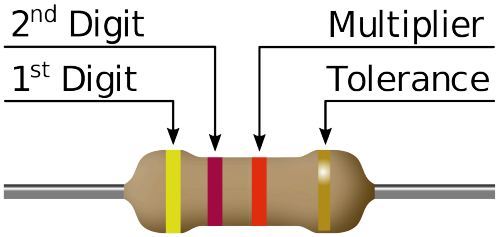

License CC BY-SA 4.0 www.picuino.com

- Calculate the missing colors and resistors in the following tables.
- In the last column, calculate the current that will flow through the resistor when connected to a 9 volt battery.
- All values should be written to 3 significant figures and the appropiate multiplier prefix (M=Mega, k=kilo, m=mili, µ=micro)

COLOR	VALUE	MULTIPLIER	TOLER-ANCE
BLACK	0	x 1	
BROWN	1	x 10	± 1%
RED	2	x 100	± 2%
ORANGE	3	x 1000	
YELLOW	4	x 10 000	
GREEN	5	x 100 000	
BLUE	6	x 1000 000	
VIOLET	7		
GREY	8		
WHITE	9		
GOLD		x 0.1	± 5%

COMMERCIAL SERIES E6: (5%)

Value Ω	Stripe 1	Stripe 2	Stripe 3	Stripe 4	I = 9V / R
	YELLOW	VIOLET	GREEN	GOLD	1.91 µA
22 Ω					
	BROWN	GREEN	BLACK	GOLD	600 mA
3.3 Ω					
	BROWN	BLACK	OR-ANGE	GOLD	900 µA
150 Ω					
	RED	RED	BROWN	GOLD	40.9 mA
47 Ω					
	OR-ANGE	OR-ANGE	RED	GOLD	2.73 mA
2.2 kΩ					
	BROWN	BLACK	BROWN	GOLD	90.0 mA
680 Ω					
	RED	RED	OR-ANGE	GOLD	409 µA
100 kΩ					
	BROWN	BLACK	GOLD	GOLD	9.00 A
68 kΩ					
	BLUE	GREY	YELLOW	GOLD	13.2 µA
3.3 MΩ					
	BROWN	GREEN	RED	GOLD	6.00 mA
4.7 kΩ					
	RED	RED	GOLD	GOLD	4.09 A
10 Ω					
	RED	RED	GREEN	GOLD	4.09 µA
15 kΩ					
	OR-ANGE	OR-ANGE	YELLOW	GOLD	27.3 µA
220 kΩ					
	YELLOW	VIOLET	GOLD	GOLD	1.91 A
6.8 MΩ					
	YELLOW	VIOLET	BROWN	GOLD	19.2 mA
1.0 kΩ					
	YELLOW	VIOLET	OR-ANGE	GOLD	192 µA
1.5 Ω					
	OR-ANGE	OR-ANGE	BLACK	GOLD	273 mA
1.5 MΩ					
	BROWN	GREEN	YELLOW	GOLD	60.0 µA
6.8 Ω					
	BLUE	GREY	BLACK	GOLD	132 mA
330 Ω					
	BROWN	BLACK	GREEN	GOLD	9.00 µA
33 kΩ					
	BLUE	GREY	RED	GOLD	1.32 mA
470 kΩ					