




## INSTALLATION INSTRUCTIONS FOR

# BLAZER100C

**WARNING:** Read the following carefully before attempting to install or service this unit! Failure to do so may result in bodily injury, property and/or fixture damage. Retain this sheet for future reference.

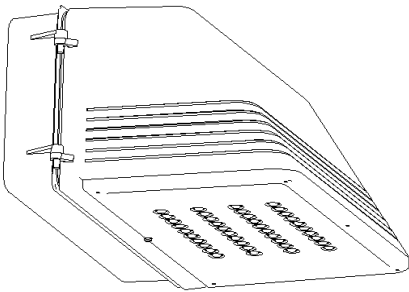

### GENERAL DESCRIPTION:

This luminaire is designed for indoor and outdoor ceiling mounted application areas and is suitable for use in wet locations. It should not be installed in locations with limited ventilation or within enclosures with high ambient temperatures.

### CAUTION:

Please be sure to follow local electrical codes. Luminaires should only be installed by a qualified electrician. Disconnect power to the circuit before wiring luminaire.

### ELECTRICAL CONNECTIONS:

Luminaires are factory wired for specific voltages. Make sure the supply voltage is compatible with the luminaire. Universal voltage luminaires may be used with any voltage between 120V and 277V.

### WIRING GUIDE:



HOT = Black

NEUTRAL = White

GROUND = Green or Green w/ Yellow Stripe

## Mounting Instructions


1. With a philips head screwdriver, remove the two screws located on the side of the cover, and remove cover.
2. Drill seven holes for installation screws. Place the luminaire into position.
3. Pull existing wiring into the fixture through the hole.
4. Secure the luminaire into position with screws in seven drilled holes.

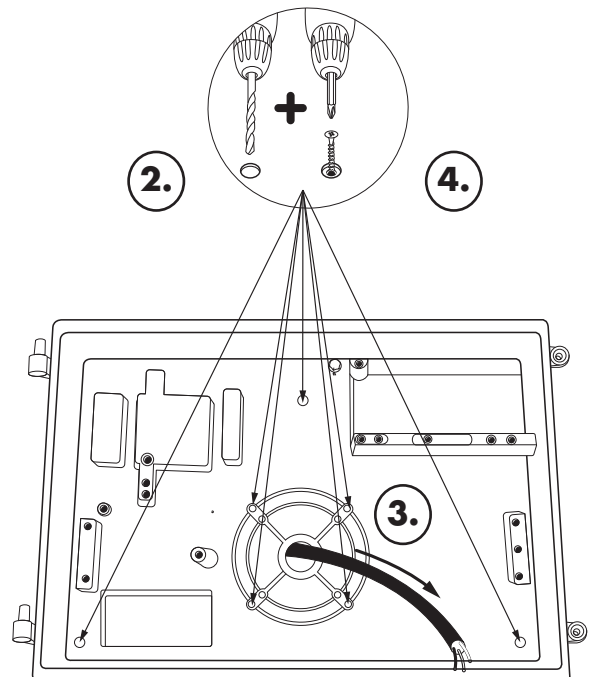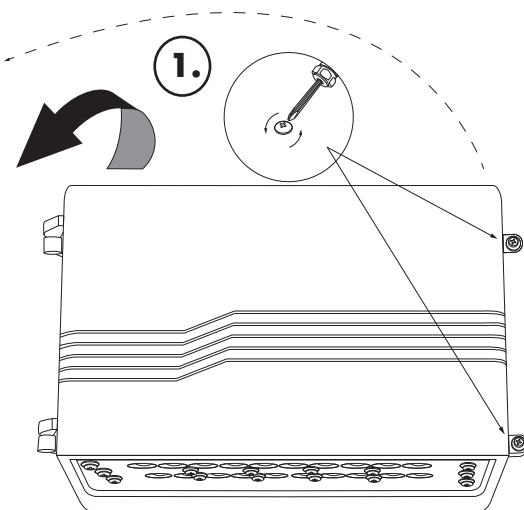


**MOUNTING INSTRUCTIONS CONTINUE ON BACK** →

## Mounting Instructions (Continued)

5. Hook the cover back onto the fixed housing.
6. Connect wires according to wiring guide.

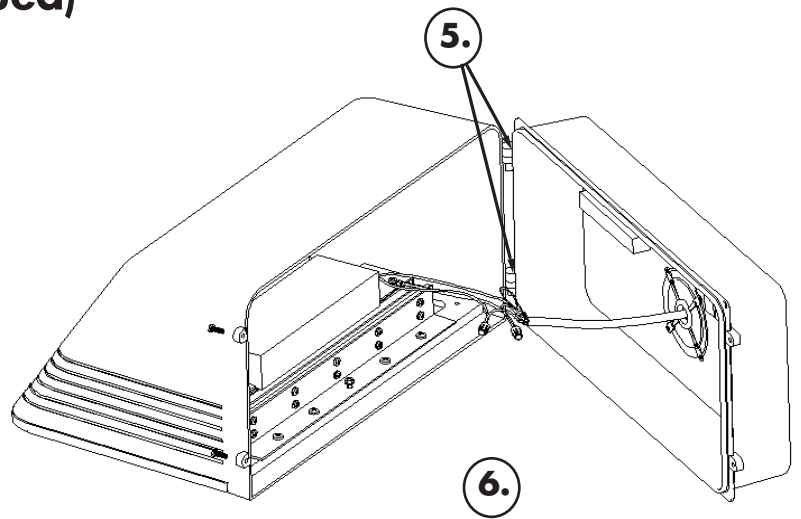

7. Close cover, and fasten with screws.

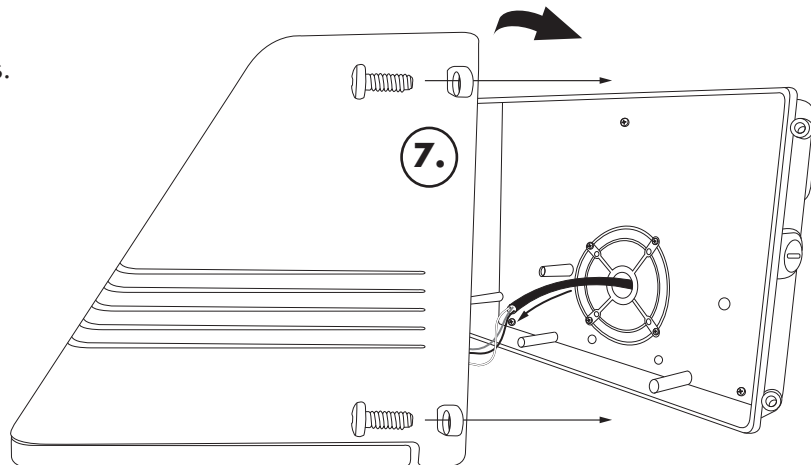

8. Apply silicone around the gap where the luminaire is attached to the wall.

