


Tandy® 2500 SX/33 HD

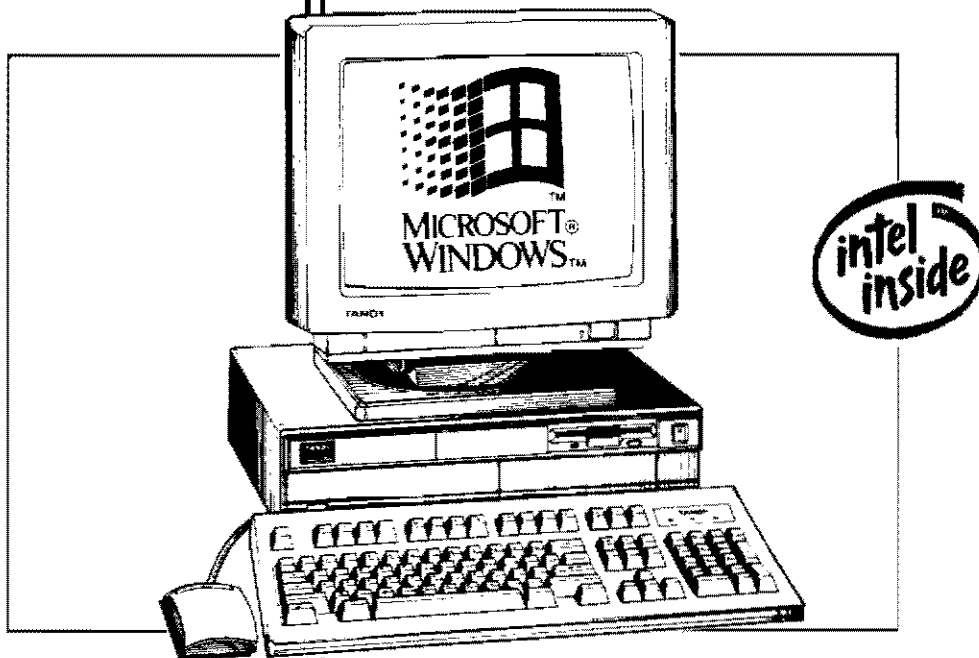

Key Features	Tandy 2500 SX/33 HD
Microprocessor	Intel 33MHz 80386SX. Optional 80387SX coprocessor.
Memory	2MB (60ns). Expandable to 10MB on main logic board.
Storage	3 1/2" 1.44MB floppy drive. Built-in 107MB SmartDrive (17ms avg. access).
Display Modes	16-bit Super-VGA graphics with 640 x 400 in 256 colors or 640 x 480 in 16 colors. Optional Modes (requires video memory upgrade to 512K): 640 x 480 in 256 colors, 800 x 600 in 16 colors, 1024 x 768 in 16 colors.
Built-in Audio	8-bit DAC with .WAV file drivers. Built-in speaker with volume control and enhanced sound.
Software (installed on hard drive)	MS-DOS, Microsoft Windows 3.1, Microsoft Works for Windows, plus Works applications.
Operating Systems	Supports MS-DOS, OS/2 1.21.
Expansion	Three 16-bit ISA slots. One 5 1/4" device slot.
Built-in Ports	Serial, parallel, mouse and headphone jacks.
Keyboard	101-key enhanced.
Mouse	Two-button PS/2 style mouse.
Power Supply	100 watts, 110/220V switchable.
Footprint (H x W x D)	4 1/4 x 15 1/2 x 15".
Certification	FCC Class B. UL listed.

Radio Shack SINCE 1921
AMERICA'S TECHNOLOGY STORE™

Marketing Relations, 700 One Tandy Center, Fort Worth, TX 76102 • (817) 390-3300
The Intel Inside Logo is a trademark of Intel Corp. Windows and the Windows Logo is a trademark of Microsoft Corp.