

4 Pin Configuration and Functions

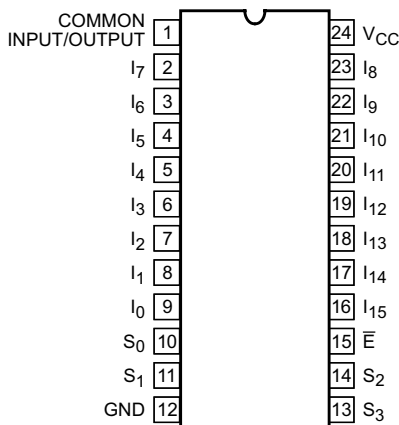


Figure 4-1. N, DW, or DB Packages 24-Pin PDIP, SOIC, or SSOP (Top View)

PIN		TYPE ⁽¹⁾	DESCRIPTION
NAME	NO.		
COMMON INPUT/OUTPUT	1	IO	Common input or output.
I ₇	2	IO	Switch input/output
I ₆	3	IO	Switch input/output
I ₅	4	IO	Switch input/output
I ₄	5	IO	Switch input/output
I ₃	6	IO	Switch input/output
I ₂	7	IO	Switch input/output
I ₁	8	IO	Switch input/output
I ₀	9	IO	Switch input/output
S ₀	10	I	Select/Address pin
S ₁	11	I	Select/Address pin
GND	12	P	Ground pin
S ₃	13	I	Select/Address pin
S ₂	14	I	Select/Address pin
$\bar{E}$	15	I	Enable for all switches ON/OFF
I ₁₅	16	IO	Switch input/output
I ₁₄	17	IO	Switch input/output
I ₁₃	18	IO	Switch input/output
I ₁₂	19	IO	Switch input/output
I ₁₁	20	IO	Switch input/output
I ₁₀	21	IO	Switch input/output
I ₉	22	IO	Switch input/output
I ₈	23	IO	Switch input/output
V _{CC}	24	P	Power pin

(1) I = input, O = output, P = Power