



WatchAir

Quick Installation Guide


WatchAir OpenArms EPUS-100

ePICT®

CONTENTS

WatchAir OpenArms EPUS-100


■ Package Contents



Smart bar



TV Antenna



Desktop mode
bracket



Upright mode bracket
(with double-sided tape)




Screw 2p



External antenna
connector



Quick Installation
Manual





AC/DC Adapter
(5V/2.5A)

CONTENTS

WatchAir OpenArms EPUS-100

■ Product Ports / Status by LED

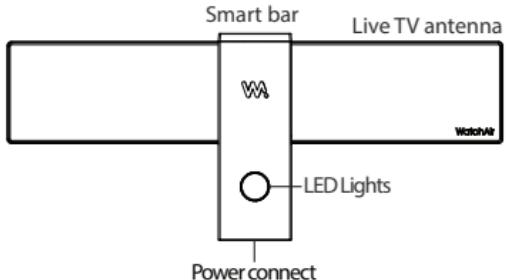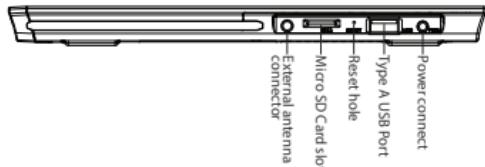


WatchAir Status	LED Color	Duration	Initiated by
Booting	Green Solid	About 30 seconds	Power cord reconnected, or resetting
Normally Operating	Blue Solid	Until abnormal	Any stand by, or streaming
Normally Recording	Purple Solid	Until finished	Starting recording
Lost Networking	Blue Blinking	Until reconnected	Something wrong with WiFi router
Updating Software	Red Solid	About 20 seconds	Automatic detection and update
Reset user data	Green/Red Solid	About 30 seconds	Push the reset hole for 7 second


Get Ready

Using The Built-in Antenna in WatchAir (Upright mode)


1. Unplug the desktop mode bracket from the smart bar.

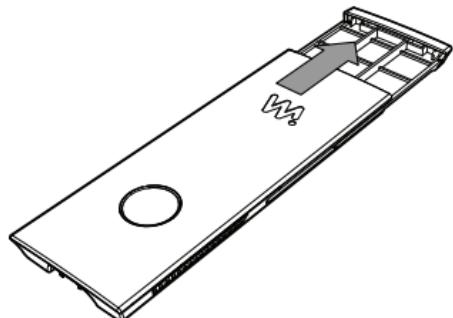


2. Plug the built-in antenna into the smart bar.

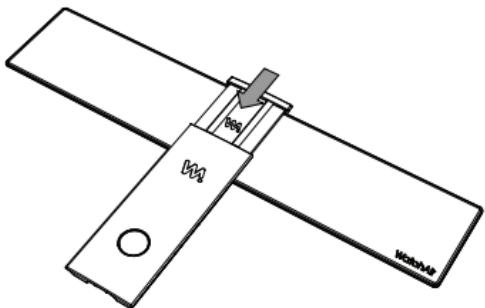

3. Make sure the antenna is connected to the smart bar without any gap.

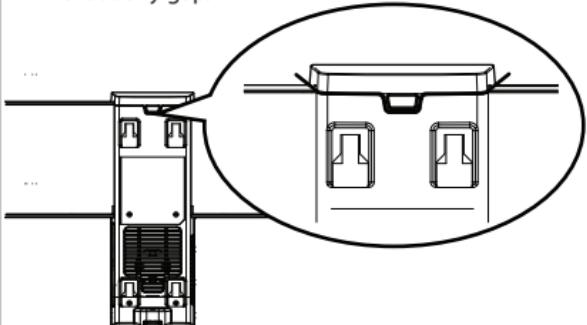


4. Mount the upright mode bracket on the rear side of the smart bar.

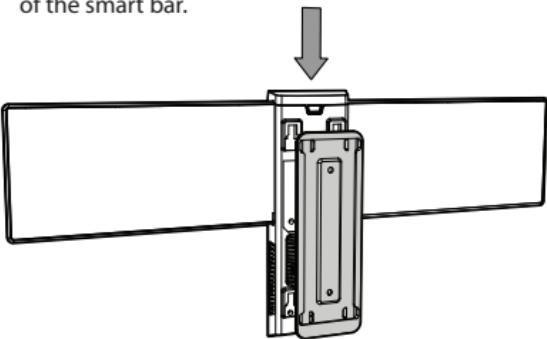


Get Ready

Using Your Existing Antenna (Desktop mode)


1. Connect the external antenna connector to your existing antenna.

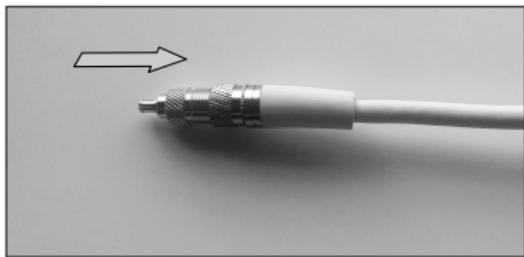


2. Plug the desktop mode bracket, the antenna connector and the power plug to the smart bar.

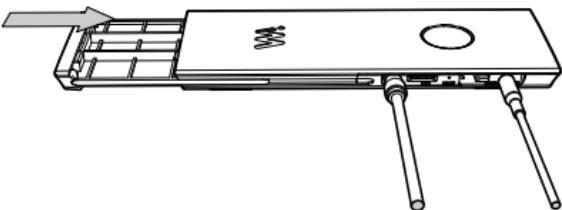

3. Locate the smart bar on an appropriate location such as table or cabinet.

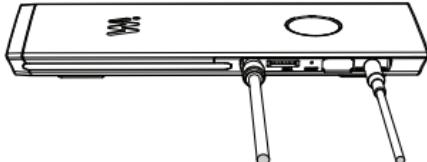


4. May use the upright installation bracket to tighten the installation.

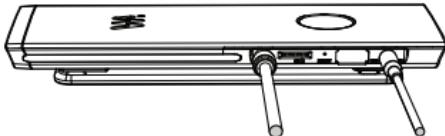

1. Sign Up

1. Please download WatchAir app on your mobile device.
Do not use WatchAir app on your streaming boxes and smart TV's to set up WatchAir for the first time.

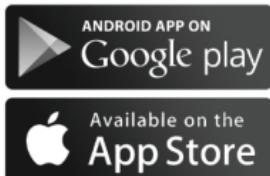

Download WatchAir App & Register

2. Sign up : one WatchAir needs at least one account.

The image shows the WatchAir Login interface. It features a logo, fields for "Email" and "Password", and buttons for "Login" and "Sign up". A checkmark is placed over the "Sign up" button, indicating it is the active or recommended action. Below the "Sign up" button is a "Forgot your password?" link.

3. Make your profile: one account can have up to eight profiles for eight different users.

The image shows the "Default User Profile" creation screen. It includes a logo, fields for "Nickname", "Gender" (with options for Male and Female), and "Birth Year".

The profile is only used to serve your better. Your personal information will not be shared with any 3rd party company.


4. Login: once you verified your email and reset your password, please login.

The image shows the WatchAir Login interface, similar to the sign up screen but with the "Login" button highlighted by a dashed box and a checkmark. It includes fields for "Email" and "Password", a "Forgot your password?" link, and a "Sign up" button.


2. Installation

Hang WatchAir on a Window or Wall

1. Follow our GPS-based guideline.

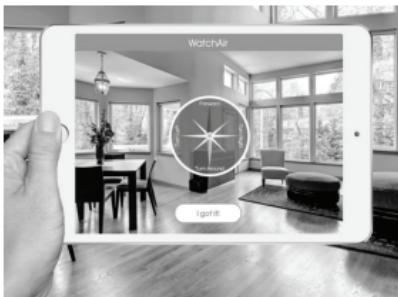


2. Find a better or good spot using the compass direction, as shown below.

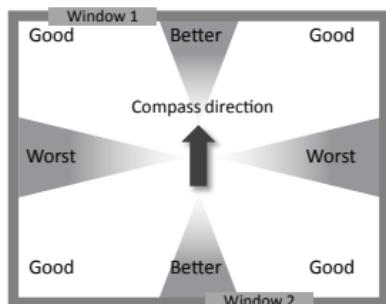

3. Install WatchAir on the window with double-sided tapes on the bracket. Please remember the higher and less metal, the better. (no windows with mosquito netting!)

If your location is over 110F° during the summer, please install WatchAir on a dry wall.

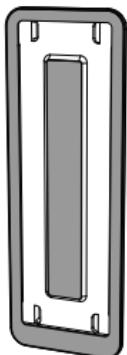


4. Or install WatchAir on the dry wall with screws through the bracket. Please make sure the dry wall does not have any metal beams at the installation position.



3. Connection

Wireless Connection Over Your WiFi Router

1. WatchAir app will take you to "Settings", as shown below. You need to choose WatchAir SSID from your WiFi list. Your WatchAir SSID is printed on your gift box, and it should start with "WA" with additional six more letters or numbers. The password is same as your WatchAir SSID.

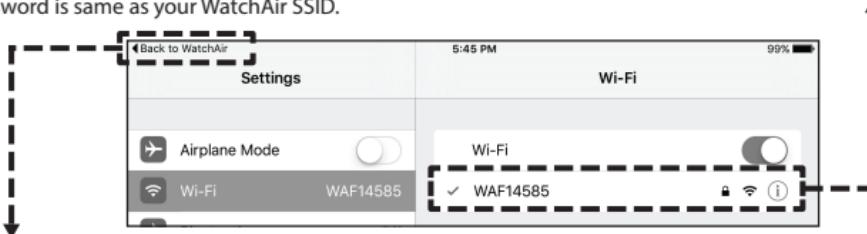

2. Touch "Back to WatchAir" to go back to WatchAir app, and choose your own WiFi router one more time. That's all.

4. Channel Scanning & More

1. Channel scanning can take a few minutes. You don't have to scan channels again unless you change the location of your antenna.

2. After channel scanning, WatchAir will automatically detect and download any additionally required software.

5. Done!

Now, enjoy your local live TV! This installation is an one-time process, so you don't have to repeat this on the other devices. Just log in once. That's it. Welcome to WatchAir!



WatchAir US Warranty Policy



Product	<i>Original WatchAir and other accessories packaged with product</i>
Warranty Period	<i>1 Year</i>
Scope of Warranty	<i>Labor & parts</i>
Warranty Service	<i>Carry in</i>

※ Such defect(s) will be repaired or replaced (with new or rebuilt parts) at the company's option without charge for parts or labor directly related to the defect(s). This Limited Warranty is conditioned upon proper use of the Products.

This Limited Warranty does not cover:

- a. Defects or damage resulting from accident, misuse, abnormal use, abnormal conditions, improper storage, exposure to liquid, moisture, dampness, sand or dirt, neglect, or unusual physical, electrical, or electromechanical stress;*
- b. Scratches, dents, and cosmetic damage, unless caused by WatchAir;*
- c. Equipment that has the serial number or the enhancement data code removed, defaced, damaged, altered, or made illegible;*
- d. Ordinary wear and tear;*
- e. Defects or damage resulting from the use of the products in conjunction or connection with accessories, products, or ancillary/peripheral equipment not furnished or approved by WatchAir;*
- f. Defects or damage resulting from improper testing, operation, maintenance, installation, service, or adjustment not furnished or approved by WatchAir; or*
- g. Defects or damage resulting from external causes such as collision with an object, fire, flooding, dirt, windstorm, lightning, earthquake, exposure to weather conditions, theft, blown fuse, or improper use of any electrical source;*
- h. For questions regarding your product's warranty, contact WatchAir Support at support@watchairtv.com or via our support page at www.watchairtv.com/support. Once your warranty is verified, you will be issued a return authorization and instruction for return shipment.*