

GeeksforGeeks

A computer science portal for geeks

GeeksQuiz

Login

- [Home](#)
- [Algorithms](#)
- [DS](#)
- [GATE](#)
- [Interview Corner](#)
- [Q&A](#)
- [C](#)
- [C++](#)
- [Java](#)
- [Books](#)
- [Contribute](#)
- [Ask a Q](#)
- [About](#)

[Array](#)

[Bit Magic](#)

[C/C++](#)

[Articles](#)

[GFacts](#)

[Linked List](#)

[MCQ](#)

[Misc](#)

[Output](#)

[String](#)


[Tree](#)

[Graph](#)

Memory Layout of C Programs

A typical memory representation of C program consists of following sections.

1. Text segment
2. Initialized data segment
3. Uninitialized data segment
4. Stack
5. Heap

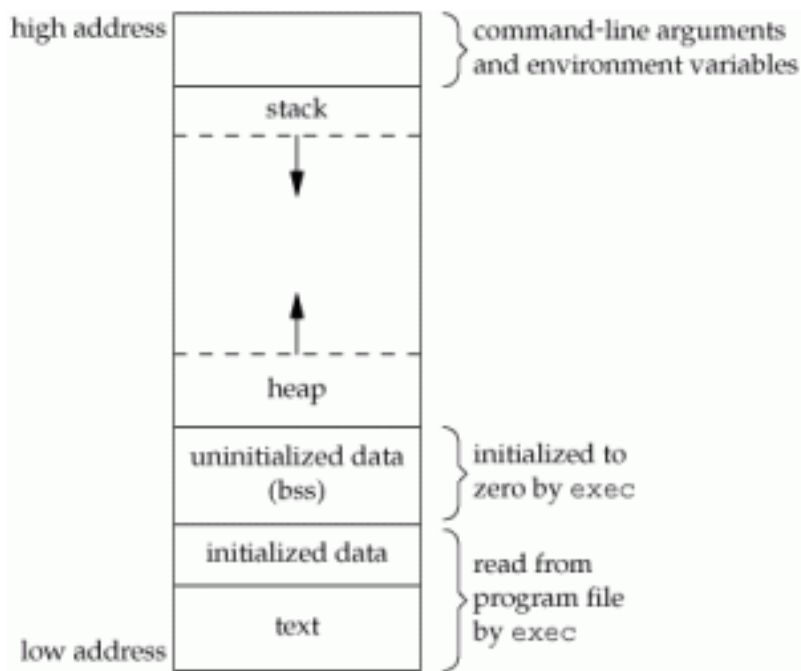

A typical memory layout of a running process

1. Text Segment:

A text segment, also known as a code segment or simply as text, is one of the sections of a program in an object file or in memory, which contains executable instructions.

As a memory region, a text segment may be placed below the heap or stack in order to prevent heaps and stack overflows from overwriting it.

Usually, the text segment is sharable so that only a single copy needs to be in memory for frequently executed programs, such as text editors, the C compiler, the shells, and so on. Also, the text segment is often read-only, to prevent a program from accidentally modifying its instructions.

2. Initialized Data Segment:

Initialized data segment, usually called simply the Data Segment. A data segment is a portion of virtual address space of a program, which contains the global variables and static variables that are initialized by the programmer.

Note that, data segment is not read-only, since the values of the variables can be altered at run time.

This segment can be further classified into initialized read-only area and initialized read-write area.

For instance the global string defined by `char s[] = "hello world"` in C and a C statement like `int debug=1` outside the main (i.e. global) would be stored in initialized read-write area. And a global C statement like `const char* string = "hello world"` makes the string literal "hello world" to be stored in initialized

read-only area and the character pointer variable string in initialized read-write area.

Ex: static int i = 10 will be stored in data segment and global int i = 10 will also be stored in data segment

3. Uninitialized Data Segment:

Uninitialized data segment, often called the “bss” segment, named after an ancient assembler operator that stood for “block started by symbol.” Data in this segment is initialized by the kernel to arithmetic 0 before the program starts executing

uninitialized data starts at the end of the data segment and contains all global variables and static variables that are initialized to zero or do not have explicit initialization in source code.

For instance a variable declared static int i; would be contained in the BSS segment.

For instance a global variable declared int j; would be contained in the BSS segment.

4. Stack:

The stack area traditionally adjoined the heap area and grew the opposite direction; when the stack pointer met the heap pointer, free memory was exhausted. (With modern large address spaces and virtual memory techniques they may be placed almost anywhere, but they still typically grow opposite directions.)

The stack area contains the program stack, a LIFO structure, typically located in the higher parts of memory. On the standard PC x86 computer architecture it grows toward address zero; on some other architectures it grows the opposite direction. A “stack pointer” register tracks the top of the stack; it is adjusted each time a value is “pushed” onto the stack. The set of values pushed for one function call is termed a “stack frame”; A stack frame consists at minimum of a return address.

Stack, where automatic variables are stored, along with information that is saved each time a function is called. Each time a function is called, the address of where to return to and certain information about the caller’s environment, such as some of the machine registers, are saved on the stack. The newly called function then allocates room on the stack for its automatic and temporary variables. This is how recursive functions in C can work. Each time a recursive function calls itself, a new stack frame is used, so one set of variables doesn’t interfere with the variables from another instance of the function.

5. Heap:

Heap is the segment where dynamic memory allocation usually takes place.

The heap area begins at the end of the BSS segment and grows to larger addresses from there. The Heap area is managed by malloc, realloc, and free, which may use the brk and sbrk system calls to adjust its size (note that the use of brk/sbrk and a single "heap area" is not required to fulfill the contract of malloc/realloc/free; they may also be implemented using mmap to reserve potentially non-contiguous regions of virtual memory into the process' virtual address space). The Heap area is shared by all shared libraries and dynamically loaded modules in a process.

Examples.

The size(1) command reports the sizes (in bytes) of the text, data, and bss segments. (for more details please refer man page of size(1))

1. Check the following simple C program

```
#include <stdio.h>
```

```
int main(void)
{
    return 0;
}
```

```
[narendra@CentOS]$ gcc memory-layout.c -o memory-layout
[narendra@CentOS]$ size memory-layout
text      data      bss      dec      hex      filename
960       248        8      1216     4c0      memory-layout
```

2. Let us add one global variable in program, now check the size of bss (highlighted in red color).

```
#include <stdio.h>
```

```
int global; /* Uninitialized variable stored in bss*/
```

```
int main(void)
{
    return 0;
}
```

```
[narendra@CentOS]$ gcc memory-layout.c -o memory-layout
[narendra@CentOS]$ size memory-layout
text      data      bss      dec      hex      filename
960       248       12      1220     4c4      memory-layout
```

3. Let us add one static variable which is also stored in bss.

```
#include <stdio.h>
```

```
int global; /* Uninitialized variable stored in bss*/
```

```
int main(void)
{
    static int i; /* Uninitialized static variable stored in bss */
    return 0;
}
```

```
[narendra@CentOS]$ gcc memory-layout.c -o memory-layout
[narendra@CentOS]$ size memory-layout
text      data      bss      dec      hex      filename
960       248       16      1224     4c8      memory-layout
```

4. Let us initialize the static variable which will then be stored in Data Segment (DS)

```
#include <stdio.h>
```

```
int global; /* Uninitialized variable stored in bss*/
```

```
int main(void)
{
    static int i = 100; /* Initialized static variable stored in DS*/
    return 0;
}
```

```
[narendra@CentOS]$ gcc memory-layout.c -o memory-layout
[narendra@CentOS]$ size memory-layout
text      data      bss      dec      hex      filename
960       252       12      1224     4c8      memory-layout
```

5. Let us initialize the global variable which will then be stored in Data Segment (DS)

```
#include <stdio.h>
```

```
int global = 10; /* initialized global variable stored in DS*/
```

```
int main(void)
{
    static int i = 100; /* Initialized static variable stored in DS*/
    return 0;
}
```

```
[narendra@CentOS]$ gcc memory-layout.c -o memory-layout
[narendra@CentOS]$ size memory-layout
text      data      bss      dec      hex      filename
960       256       8       1224     4c8      memory-layout
```

This article is compiled by **Narendra Kangralkar**. Please write comments if you find anything incorrect, or you want to share more information about the topic discussed above.

Source:

http://en.wikipedia.org/wiki/Data_segment
http://en.wikipedia.org/wiki/Code_segment
<http://en.wikipedia.org/wiki/.bss>
<http://www.amazon.com/Advanced-Programming-UNIX-Environment-2nd/dp/0201433079>

Application Monitoring SW

Manage Web Apps, Servers,
Databases Custom apps.
Download Now!



Related Topics:

- [A Problem in Many Binary Search Implementations](#)
- [Analysis of Algorithms | Set 4 \(Analysis of Loops\)](#)
- [Analysis of Algorithms | Set 3 \(Asymptotic Notations\)](#)
- [NP-Completeness | Set 1 \(Introduction\)](#)
- [Static and Dynamic Libraries | Set 1](#)
- [The Ubiquitous Binary Search | Set 1](#)
- [Reservoir Sampling](#)
- [Analysis of Algorithms | Set 2 \(Worst, Average and Best Cases\)](#)

Tags: [Memory Layout Of C Program](#)

Like 153 Tweet 6  37

Writing code in comment? Please use ideone.com and share the link here.

113 Comments GeeksforGeeks

 Login ▾

Sort by Newest ▾

Share  Favorite ★

Join the discussion...

setu Gupta • 25 days ago

where is volatile , register,and extern is saved.

2 ^ | ▾ • Reply • Share >

**amit** → setu Gupta • 5 days agovolatile: on Processor Register(if allowed by Processor) else on stack(Local),
DS(Global)

Register: CPU registers

extern: resolved at time of formation of a.out from multiple obj files

^ | ▾ • Reply • Share >

setu Gupta • 25 days ago

Nice explanation but i have a doubt.

main()->calling-> func1()->calling->func2()

if func2 have

static int a=4;

where it will be saved.

according to above explanation i can understand that it must go to initialized data segment.

Am i right?

1 ^ | ▾ • Reply • Share >

jeevan reddy mandali → setu Gupta • 24 days ago

yes data segment!

^ | ▾ • Reply • Share >

**Neeraj Shrimali** • a month ago

If Static Variable is already initialized with 0. Then why it gets space in bss.

^ | ▾ • Reply • Share >

**Hemanth** → Neeraj Shrimali • a month agoIf suppose static variable is not initialized,kernel will initialize it to 0 and then it is
stored in BSS. correct ? So if u initialize a static variable with 0,it will be stored in bss
only.i guess u got it

^ | ▾ • Reply • Share >

-



GeeksforGeeks

Like

77,310 people like GeeksforGeeks.



- [Interview Experiences](#)
 - [Advanced Data Structures](#)
 - [Dynamic Programming](#)
 - [Greedy Algorithms](#)
 - [Backtracking](#)
 - [Pattern Searching](#)
 - [Divide & Conquer](#)
 - [Mathematical Algorithms](#)
 - [Recursion](#)
 - [Geometric Algorithms](#)



• Popular Posts

- [All permutations of a given string](#)
- [Memory Layout of C Programs](#)
- [Understanding “extern” keyword in C](#)
- [Median of two sorted arrays](#)
- [Tree traversal without recursion and without stack!](#)
- [Structure Member Alignment, Padding and Data Packing](#)
- [Intersection point of two Linked Lists](#)
- [Lowest Common Ancestor in a BST.](#)
- [Check if a binary tree is BST or not](#)
- [Sorted Linked List to Balanced BST](#)

- [Follow @GeeksforGeeks](#)  [Subscribe](#)

• Recent Comments

- whatever

you idiot, you don't even explain why you set...

[Searching for Patterns | Set 2 \(KMP Algorithm\)](#) · [2 minutes ago](#)

- Arvind

<http://ideone.com/r29PZt>

[Check if each internal node of a BST has exactly one child](#) · [26 minutes ago](#)

- Arvind

`bool hasOnechild(int pre[], int n) { if(n==0 ||...`

[Check if each internal node of a BST has exactly one child](#) · [36 minutes ago](#)

- Arvind

`bool hasOnechild(int pre[], int n) { if(n==0 ||...`

[Check if each internal node of a BST has exactly one child](#) · [36 minutes ago](#)

- Arvind




`bool hasOnechild(int pre[], int n) { if(n==0 ||...`

[Check if each internal node of a BST has exactly one child](#) · [38 minutes ago](#)

- [prakharmy](#)

hey .. i know .. that's why i wrote 'second...

[Implement Queue using Stacks](#) · [1 hour ago](#)

AdChoices [► Data Structure](#)[► Read Only Memo](#)AdChoices [► Physical Memory](#)[► Memory Allocator](#)AdChoices [► In Memory Data](#)[► Memory Program](#)

- [tlk.io](#) [geeksforgeeks](#)

[Load more](#)

Ekta

E



anyone recently
interviewed by ms?

satveer

S



Hi
i attend skype for MS
2 weeks back

- tanay
+

@geeksforgeeks, [Some rights reserved](#) ____ [Contact Us!](#)

Powered by [WordPress](#) & [MooTools](#), customized by geeksforgeeks team