## LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR

### **ASD SERIES**





### **FEATURES:**

- Low height 0.95mm max
- Low current consumption
- Tri-state function
- Suitable for RoHS compliant reflow
- Tight stability option
- Seam sealed package assures high reliability

#### > APPLICATIONS:

- CCD clock for VTR Camera
- Equipment connected to PC or PC cards
- Thin equipment

### > STANDARD SPECIFICATIONS:

Parameters		Minimum	Typical	Maximum	Units	Notes
Frequency Range		0.750		75	MHz	
Operating Temperature		-20		+70	°C	STD temp. Option code E (See options)
Storage Temperature		-55		+100	°C	
Overall Frequency Stability		-100		+100	ppm	See options
Supply Voltage (Vdd)		+3.135	+3.3	+3.465	V	ASD (Standard)
		+2.85	+3.0	+3.15		ASD1
		+2.375	+2.5	+2.625		ASD2
		+1.71	+1.8	+1.89		ASD3
		+0.95	+1.0	+1.05		ASD6
Input Current (Idd)	ASD (3.3V)		2.5	5		0.750~15.999 MHz
			4	7	mA	16.000~39.999 MHz
			9	13		40.000~66.666 MHz
	ASD1 (3.0V)		2.5	4	mA	0.750~15.999 MHz
			3.5	6		16.000~39.999 MHz
			8	12		40.000~66.666 MHz
	ASD2 (2.5V)		2	3.5	mA	0.750~15.999 MHz
			3	5		16.000~39.999 MHz
			7	10		40.000~66.666 MHz
	ASD3 (1.8V)		1	2.5	mA	0.750~15.999 MHz
			2	4		16.000~39.999 MHz
			4	7		40.000~66.666 MHz
	ASD6 (1.0V)		1.0	2.5	mA	25.000 MHz
Symmetry @ 1/2Vdd		40		60	%	STD (See option)
Output Load:				15	pF	CMOS
Output Voltage (VOH):		0.9* Vdd			V	
Output Voltage (VOL):				0.1* Vdd	V	






# LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR







### > STANDARD SPECIFICATIONS... continued:

ASD (3.3V)	Payamatays		Minimum	Typical	Maximum	Units	Notes
ASD (3.3V)	Parameters		Millillulli			Units	
Rise and Fall Time (Tr/Tf):		ASD (3.3V)			· · · · · · · · · · · · · · · · · · ·	ne	
Rise and Fall Time (Tr/Tf):    ASD1 (3.0V)		113D (3.5 V)			4	113	
ASD1 (3.0V)						ns	
Rise and Fall Time (Tr/Tf):		ASD1 (3.0V)			i		
ASD2 (2.5V)		11021 (0.01)			1		
ASD2 (2.5V)				4	8	ns	
ASD3 (1.8V)	(1r/1f):	ASD2 (2.5V)					
ASD3 (1.8V)		, ,		2.5	5		40.000~66.666 MHz
ASD6 (1.0V)				5	10	ns	0.750~15.999 MHz
ASD6 (1.0V)     1.9   6.0   ns   25.000 MHz		ASD3 (1.8V)		3.5	8		16.000~39.999 MHz
ASD (3.3V)							40.000~66.666 MHz
ASD (3.3V)		ASD6 (1.0V)		1.9	6.0	ns	
Start-up Time:		ASD (3.3V)				ms	
Start-up Time:   ASD1 (3.0V)							
Start-up Time:    Start-up Time:							
Start-up Time:  ASD2 (2.5V)		4 CD 1 (2 OV)					
Start-up Time:		ASD1 (3.0V)				ms	
ASD2 (2.5V)	Ctant and Times			i			
ASD3 (1.8V)	Start-up Time:	A CD2 (2.5V)		_		<b>***</b> C	
ASD3 (1.8V) 6 10 ms 16.000-39.999 MHz ASD6 (1.0V) 2.0 10 ms 25.000 MHz  Tri-state function (Stand-by): "1" (VIH≥0.7*VVdd) or Open: Oscillation; "0" (VIH~0.3*Vdd) : No oscillation; "0" (VIH~0.00~6.6666 MHz 40.000~66.666 MHz 40.000~66.66		ASD2 (2.3 V)				IIIS	
ASD3 (1.8V)							
ASD6 (1.0V)		ASD3 (1.8V)				me	
ASD6 (1.0V)		/ASD3 (1.0 v)			1	1113	
Tri-state function (Stand-by):  "1" (VIH≥0.7*Vdd) or Open: Oscillation; "0" (VIH<0.3*Vdd) : No oscillation/Hi Z		ASD6 (1.0V)				ms	
ASD (3.3V)	· · · · · · · · · · · · · · · · · · ·		"1" (VIH>0.7			1115	25.000 11112
ASD (3.3V) 0.4 1.0 ps 16.000-39.999 MHz  ASD (3.0V) 0.3 1.0 ps 16.000-39.999 MHz  ASD1 (3.0V) 0.4 1.0 ps 16.000-39.999 MHz  ASD1 (3.0V) 0.5 1.0 ps 16.000-39.999 MHz  ASD2 (2.5V) 0.5 1.0 ps 16.000-39.999 MHz  ASD3 (1.8V) 0.5 1.0 ps 16.000-39.999 MHz  ASD6 (1.0V) 0.3 1.0 ps 25.000 MHz  ASD6 (1.0V) 0.3 0.5 0.0 ps 16.000-39.999 MHz  ASD7 (3.3V) 3.0 5.0 ps 16.000-39.999 MHz  ASD7 (3.0V) 3.0 5.0 ps 16.000-39.999 MHz  ASD8 (1.0V) 4.8 6.0 ps 25.000 MHz  ASD9 (1.0V) 4.8 6.0 ps 25.000 MHz	Tri-state function (Stand	d-by):					
ASD (3.3V) 0.4 1.0 ps 16.000~39.999 MHz ASD1 (3.0V) 0.4 1.0 ps 16.000~39.999 MHz ASD1 (3.0V) 0.4 1.0 ps 16.000~39.999 MHz 0.3 1.0 ps 16.000~39.999 MHz 0.5 1.0 ps 16.000~39.999 MHz 3.0 5.0 ps 16.000~39.999 MHz		ASD (3.3V)	ì	1	1	ps	0.750~15.999 MHz
Phase Jitter (12kHz to 20MHz)  Phase Jitter (12kHz to 20MHz)  ASD1 (3.0V)  ASD2 (2.5V)  ASD2 (2.5V)  ASD3 (1.8V)  ASD3 (1.8V)  ASD4 (3.0V)  ASD5 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  Period Jitter RMS  ASD1 (3.0V)  ASD2 (2.5V)  ASD3 (1.8V)  ASD4 (3.0V)  ASD5 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  ASD7 ASD7 ASD7 ASD7 ASD7 ASD7 ASD7 ASD7							
Phase Jitter (12kHz to 20MHz)  Phase Jitter (12kHz to 20MHz)  ASD2 (2.5V)  ASD2 (2.5V)  ASD3 (1.8V)  Period Jitter RMS  Period Jitter RMS  Period Jitter RMS  ASD3 (1.8V)  ASD3 (1.8V)  ASD3 (1.8V)  ASD4 (2.5V)  ASD5 (2.5V)  ASD6 (1.0V)  ASD7 ASD7 ASD7 ASD7 ASD7 ASD7 ASD7 ASD7					•		
Phase Jitter (12kHz to 20MHz)				0.4	1.0	ps	
Phase litter (12kHz to 20MHz)  ASD2 (2.5V)   ASD3 (1.8V)   ASD3 (1.8V)   ASD6 (1.0V)   ASD1 (3.0V)   Period Jitter RMS  ASD2 (2.5V)   ASD3 (1.8V)   ASD3 (1.8V)   ASD3 (1.8V)   ASD3 (1.8V)   ASD4 (1.0V)   ASD5 (1.0V)   ASD6 (1.0V)   ASD7 (1.0V)   ASD7 (1.0V)   ASD8 (1.0V)   ASD9 (1.0V)		ASD1 (3.0V)		0.4	1.0		16.000~39.999 MHz
ASD2 (2.5V)	Dhaga litter			0.3	1.0		40.000~66.666 MHz
ASD2 (2.5V) 0.5 1.0 ps 16.000~39.999 MHz 40.000~66.666 MHz				0.5	1.0		
ASD3 (1.8V) 0.5 1.0 ps 0.750~15.999 MHz 16.000~39.999 MHz 40.000~66.666 MHz 40.000~66.666 MHz 40.000~66.666 MHz 40.000~66.666 MHz 50.000	(12kHz to 20MHz)	ASD2 (2.5V)		0.5	1.0	ps	
ASD3 (1.8V) 0.5 1.0 ps 16.000~39.999 MHz  ASD6 (1.0V) 0.3 1.0 ps 25.000 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD (3.3V) 3.0 5.0 ps 16.000~39.999 MHz  ASD (3.3V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD1 (3.0V) 3.0 5.0 ps 16.000~39.999 MHz  ASD1 (3.0V) 3.0 5.0 ps 16.000~39.999 MHz  ASD2 (2.5V) 3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 25.000 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz							
ASD6 (1.0V)						ps	
ASD6 (1.0V) 0.3 1.0 ps 25.000 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD (3.3V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD1 (3.0V) 3.0 5.0 ps 16.000~39.999 MHz  ASD2 (2.5V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD2 (2.5V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  ASD4 (1.0V) 3.0 5.0 ps 16.000~39.999 MHz  ASD5 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm		, ,					
ASD (3.3V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD1 (3.0V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 25.000 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm							
ASD (3.3V) 3.0 5.0 ps 16.000~39.999 MHz 40.000~66.666 MHz 40.000~66.666 MHz 40.000~66.666 MHz 5.0 ps 16.000~39.999 MHz 6.000 MHz 6		ASD6 (1.0V)		1		ps	
Period Jitter RMS  ASD1 (3.0V)  ASD2 (2.5V)  ASD3 (1.8V)  ASD3 (1.8V)  ASD6 (1.0V)   ASD6 (1.0V)   ASD6 (1.0V)   3.0   3.0  5.0  40.000~66.666 MHz  0.750~15.999 MHz  40.000~66.666 MHz  0.750~15.999 MHz  40.000~66.666 MHz  0.750~15.999 MHz  0.750~15.999 MHz  40.000~66.666 MHz  0.750~15.999 MHz  40.000~66.666 MHz  0.750~15.999 MHz  40.000~66.666 MHz  16.000~39.999 MHz  40.000~66.666 MHz  ASD6 (1.0V)   4.8  6.0  ps  25.000 MHz  Aging at 25°C/year	Period Jitter RMS	1 GD (2 GY)					
ASD1 (3.0V)  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 40.000~66.666 MHz  ASD2 (2.5V)  3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V)  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 25.000 MHz  ASD6 (1.0V)  4.8 6.0 ps 25.000 MHz  Aging at 25°C/year		ASD (3.3V)			•	ps	
Period Jitter RMS  ASD1 (3.0V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 40.000~66.666 MHz  ASD2 (2.5V) 3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm							
Period Jitter RMS  ASD2 (2.5V) 3.0 5.0		A CD1 (2 OV)				<b>n</b> a	
Period Jitter RMS  ASD2 (2.5V)  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 40.000~66.666 MHz  ASD3 (1.8V)  ASD3 (1.8V)  ASD6 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  ASD6 (1.0V)  4.8 6.0 ps 25.000 MHz  ASD7 (1.8V)  ASD7 (1.8V)  4.8 6.0 ps 25.000 MHz  4.8 ppm		ASDI (3.0V)				рs	
ASD2 (2.5V) 3.0 5.0 ps 16.000~39.999 MHz 3.0 5.0 ps 40.000~66.666 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 25.000 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm				1			
ASD3 (1.8V) 3.0 5.0 40.000~66.666 MHz  ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 16.000~39.999 MHz  3.0 5.0 ps 25.000 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm		ASD2 (2.5V)				ns	
ASD3 (1.8V) 3.0 5.0 ps 0.750~15.999 MHz 3.0 5.0 ps 16.000~39.999 MHz 3.0 5.0 ps 40.000~66.666 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm						pз	
ASD3 (1.8V) 3.0 5.0 ps 16.000~39.999 MHz 3.0 5.0 ps 40.000~66.666 MHz  ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz  Aging at 25°C/year -5 +5 ppm		ASD3 (1.8V)					
3.0 5.0 40.000~66.666 MHz     ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz     Aging at 25°C/year -5 +5 ppm						ps	
ASD6 (1.0V) 4.8 6.0 ps 25.000 MHz Aging at 25°C/year -5 +5 ppm						PS	
Aging at 25°C/year -5 +5 ppm		ASD6 (1.0V)			1	ps	
			-5				
	•				10	μA	



### LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR









2.5 X 2.0 X 0.8mm

### > OPTIONS AND PART IDENTIFICATION:

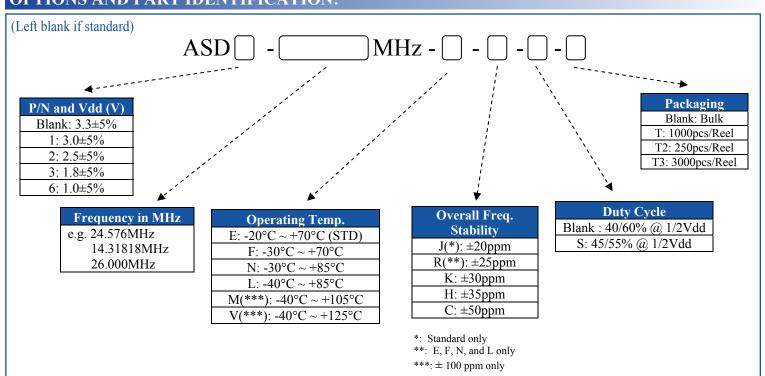

#### **OUTLINE DRAWING:**

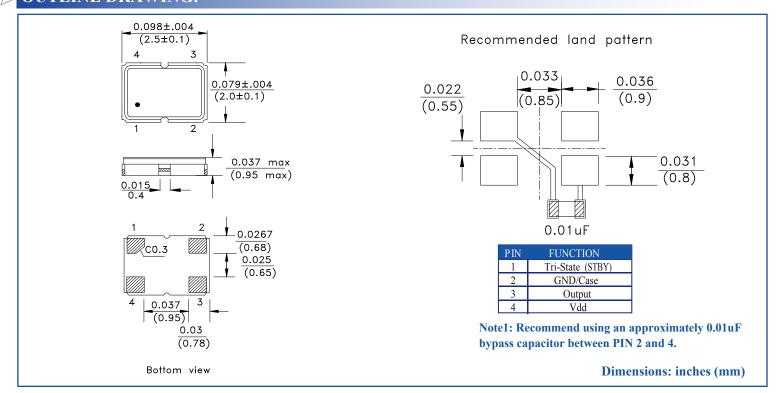





# LOW VOLTAGE HCMOS SURFACE-MOUNT CRYSTAL CLOCK OSCILLATOR








2.5 X 2.0 X 0.8mm


### **► TAPE & REEL:**

T: 1000pcs/reel T2: 250pcs/reel T3: 3000pcs/reel

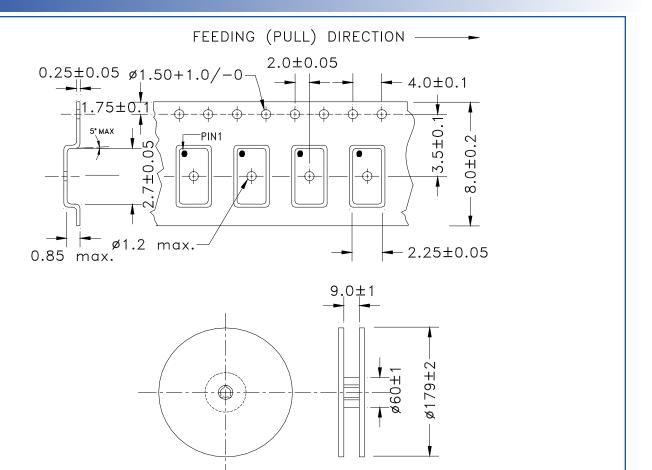

**Dimensions: mm** 

### **REFLOW PROFILE:**

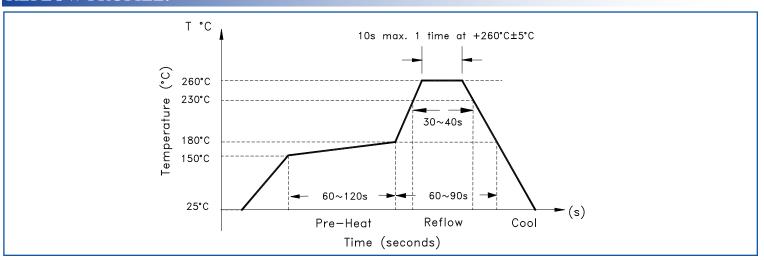



Need a test socket for the ASD Series? To view compatible **PRECISION TEST & BURN-IN SOCKETS** for these parts, <u>click here. P/N AXS-2520-04-01</u>

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



