

# Infrastructure as Code

CSSE6400

Brae Webb

March 21, 2022

- Do a quick poll.
- Who has heard the term IaC before this course?
- Who has used IaC before this course?


Infrastructure as Code

# How did we get here?

Pre-2000

The *Iron Age*

## Iron Age



## Iron Age




Developer only had a few machines — so few the machines often got fun names.

Introducing...

# The *Cloud Age*

## The Cloud Age

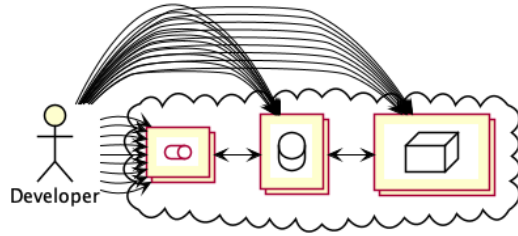

- Summarise: things got complicated quickly, we need more hardware and it's easier to provision.
- Largely thanks to virtualization — no physical activity for a new machine.

When faced with complexity

**Automate it!**

- We have too much to manage to do it manually.
- We're about to start enumerating automation techniques.



# The larger story

Server Config   Config Management

# The larger story

Server Config   Config Management  
Application Config   Config Files

# The larger story

- Server Config
- Application Config
- Provisioning
- Config Management
- Config Files
- Infrastructure Code

# The larger story

Server Config    Config Management

Application Config    Config Files

Provisioning    Infrastructure Code

Building    Continuous Integration

# The larger story

- Server Config    Config Management
- Application Config    Config Files
- Provisioning    Infrastructure Code
- Building    Continuous Integration
- Deployment    Continuous Deployment

# The larger story

- Server Config    Config Management
- Application Config    Config Files
- Provisioning    Infrastructure Code
- Building    Continuous Integration
- Deployment    Continuous Deployment
- Testing    Automated Tests

# The larger story

Server Config	Config Management
Application Config	Config Files
Provisioning	Infrastructure Code
Building	Continuous Integration
Deployment	Continuous Deployment
Testing	Automated Tests
Database Administration	Schema Migration

# The larger story

Server Config	Config Management
Application Config	Config Files
Provisioning	Infrastructure Code
Building	Continuous Integration
Deployment	Continuous Deployment
Testing	Automated Tests
Database Administration	Schema Migration
Specifications	Behaviour Driven Development



#### Definition 1. Infrastructure Code

Code that provisions and manages *infrastructure resources*.

## Definition 2. Infrastructure Code

Code that provisions and manages *infrastructure resources*.

## Definition 3. Infrastructure Resources

Compute resources, networking resources, and storage resources.

## Infrastructure Code



IC often thought of as the right-hand side but includes all.

```
1  #!/bin/bash
3  SG=$(aws ec2 create-security-group ...)
5  aws ec2 authorize-security-group-ingress --group-id "$SG"
7  INST=$(aws ec2 run-instances --security-group-ids "$SG" \
8      --instance-type t2.micro)
```

Using aws CLI to create EC2 access like the practical.

```
1  import boto3

3  def create_instance():
4      ec2_client = boto3.client("ec2", region_name="us-east-1")
5      response = ec2.create_security_group(...)
6      security_group_id = response['GroupId']

8      data = ec2.authorize_security_group_ingress(...)

10     instance = ec2_client.run_instances(
11         SecurityGroups=[security_group_id],
12         InstanceType="t2.micro",
13         ...
14     )
```

Using aws python library (boto3).

```
1 resource "aws_instance" "hextris-server" {
2     instance_type = "t2.micro"
3     security_groups = [aws_security_group.hextris-server.name]
4     ...
5 }

7 resource "aws_security_group" "hextris-server" {
8     ingress {
9         from_port = 80
10        to_port = 80
11        ...
12    }
13    ...
14 }
```

Finally, terraform.

Question

Notice anything different?

- Prompting for declarative.
- Might notice verbosity.

The *main* difference

## Imperative vs. declarative

IC is heading towards a more declarative paradigm.



## Infrastructure Code

- Provisions and manages *infrastructure resources*.

## Infrastructure Code

- Provisions and manages *infrastructure resources*.
- Only one part of the movement to *automate* the complexities of development.

## Infrastructure Code

- Provisions and manages *infrastructure resources*.
- Only one part of the movement to *automate* the complexities of development.
- Ranges from simple shell scripts up to...?

## Infrastructure Code

- Provisions and manages *infrastructure resources*.
- Only one part of the movement to *automate* the complexities of development.
- Ranges from simple shell scripts up to...?
- Tendancy to be *declarative*.

Summarising what we've already covered.

Typo?

Infrastructure Code  $\neq$  Infrastructure *as* Code

- Mention that this distinction is ours.
- Real world unfortunately mixes the two.

#### Definition 4. Infrastructure as Code

Following the same *good coding practices* to manage Infrastructure Code as standard code.

Warning!

Infrastructure as Code still *early* and quite *bad*.

- Code reuse is low.
- Importing existing resources is non-trivial.
- Refactoring is painful.
- State management can be tricky.

Question

What are *good coding practices*?

Ask the class.



Good Coding Practice #1

## *Everything* as code

A practice we do but barely discuss in 'regular' programming because it doesn't make sense not to do it.

```
1  #!/bin/bash
3  ./download-dependencies
4  ./build-resources
5  cp -r output/* artifacts/
```

```
1  #!/bin/bash
3  ./download-dependencies
4  ./build-resources
5  cp -r output/* artifacts/
```

```
1  $ cp: directory artifacts does not exist
```

An example of relying on external state in 'regular' programming.

```
1 resource "aws_instance" "hextris-server" {
2     instance_type = "t2.micro"
3     security_groups = ["sg-6400"]
4     ...
5 }
```

Draw a parallel to the bash example and this, which relies on 'sg-6400' existing.

```
1 resource "aws_instance" "hextris-server" {
2     instance_type = "t2.micro"
3     security_groups = [aws_security_group.hextris-server.name]
4     ...
5 }

7 resource "aws_security_group" "hextris-server" {
8     ingress {
9         from_port = 80
10        to_port = 80
11        ...
12    }
13    ...
14 }
```

The better approach.

Everything as code avoids

# Configuration drift

Configuration drift creates

# Snowflakes

- Snowflakes: magical machines that ‘just work’ and everyone is afraid to touch.
- Snowflake because they’re unique and easy to break because no one knows how it works.

## Benefits

### 1. Reproducible.



Good Coding Practice #2

# Version control

## Benefits

1. Restorable.
2. Accountable.

Good Coding Practice #3

# Automation

## Benefits

### 1. Consistent.

Automatically applying or checking IC is in sync means the main branch is consistent with reality.

Good Coding Practice #4

# Code Reuse

## Benefits

1. Better<sup>1</sup> code.
2. Less work.
3. Only one place to update (or verify).

---

<sup>1</sup>generally

Good Coding Practice #5

# Testing

## Test Pyramid



- Traditional test pyramid.
- Unit testing relies on isolated testing.
- But...isolated testing doesn't make *much* sense for IaC.



# IaC Test Pyramid



```
1 func TestTerraformAwsInstance(t *testing.T) {
2     terraformOptions := terraform.WithDefault(t, &terraform.Options{
3         TerraformDir: "../week03/",
4     })
5
6     defer terraform.Destroy(t, terraformOptions)
7     terraform.InitAndApply(t, terraformOptions)
8
9     publicIp := terraform.Output(t, terraformOptions, "public_ip")
10    url := fmt.Sprintf("http://%s:8080", publicIp)
11
12    http_helper.HttpGetWithCustomValidation(t, url, nil, 200,
13        func(code, resp) { code == 200 &&
14            strings.Contains(resp, "hextris")})
15 }
```

```
1 Feature: Define AWS Security Groups

3 Scenario: Only selected ports should be publicly open
4     Given I have AWS Security Group defined
5     When it contains ingress
6     Then it must only have tcp protocol and port 22,443 for 0.0.0.0/0
```

An example of compliance testing.

Benefits

## 1. Trust.