DEFT Wi-Fi Smart Sensor Installation Manual

Product Introduction:

DEFT Wi-Fi smart sensor is work with Wi-Fi. It connects with home WIFI achieve two-way intercom between cell phone and light/ alarm. This product can be used as energy saving switch and also as security device. On detection of motion and light intensity it turn on the light/ Alarm.
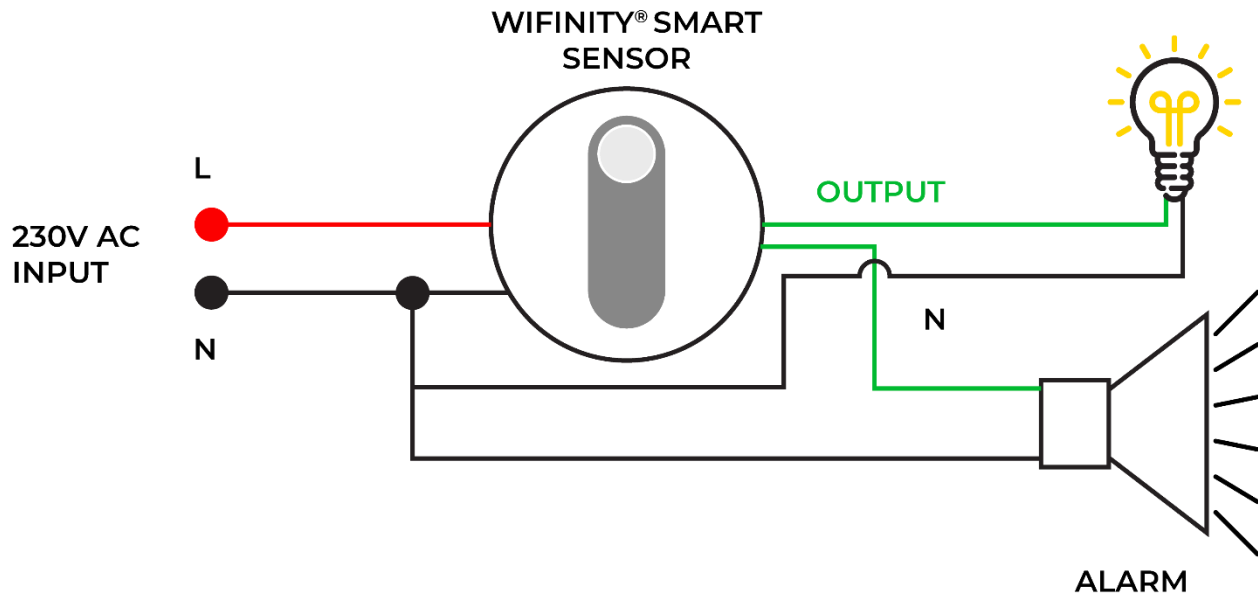
.
.

Connection Diagram:

Fig-a   WIFINITY SMART SENSOR Wiring Diagram.

DEFT WIFI Smart Sensor Consist Three Wires.

1) Supply wire for sensor (220 – 240 VAC).
2) Light Wire (to which light load is connected).
3) Alarm wire (to which alarm load is connected).

HOME ONE TECHNOLOGIES

Installation Process For mobile application:

App download (Android)

Android phone can search for **"Wifinity"** in play Store and download it.

Link for application:

https://play.google.com/store/apps/details?id=com.homeone.mydeft.android
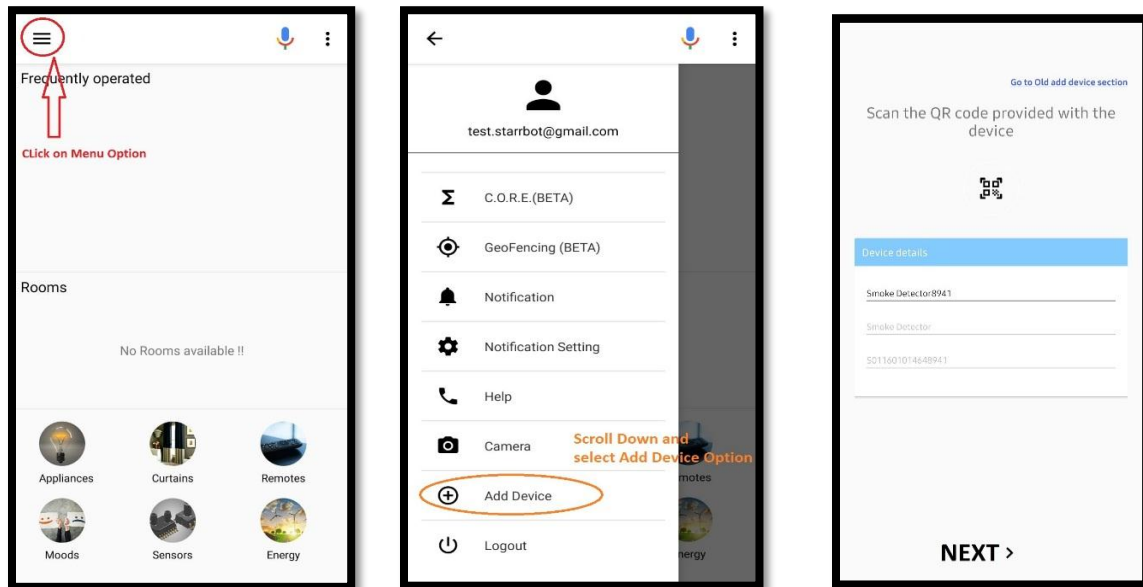
Step1: Install the **"Wifinity"** application in your smartphone.

Step2: To create new user click on **add user**, fill the user details and click on **create user.**
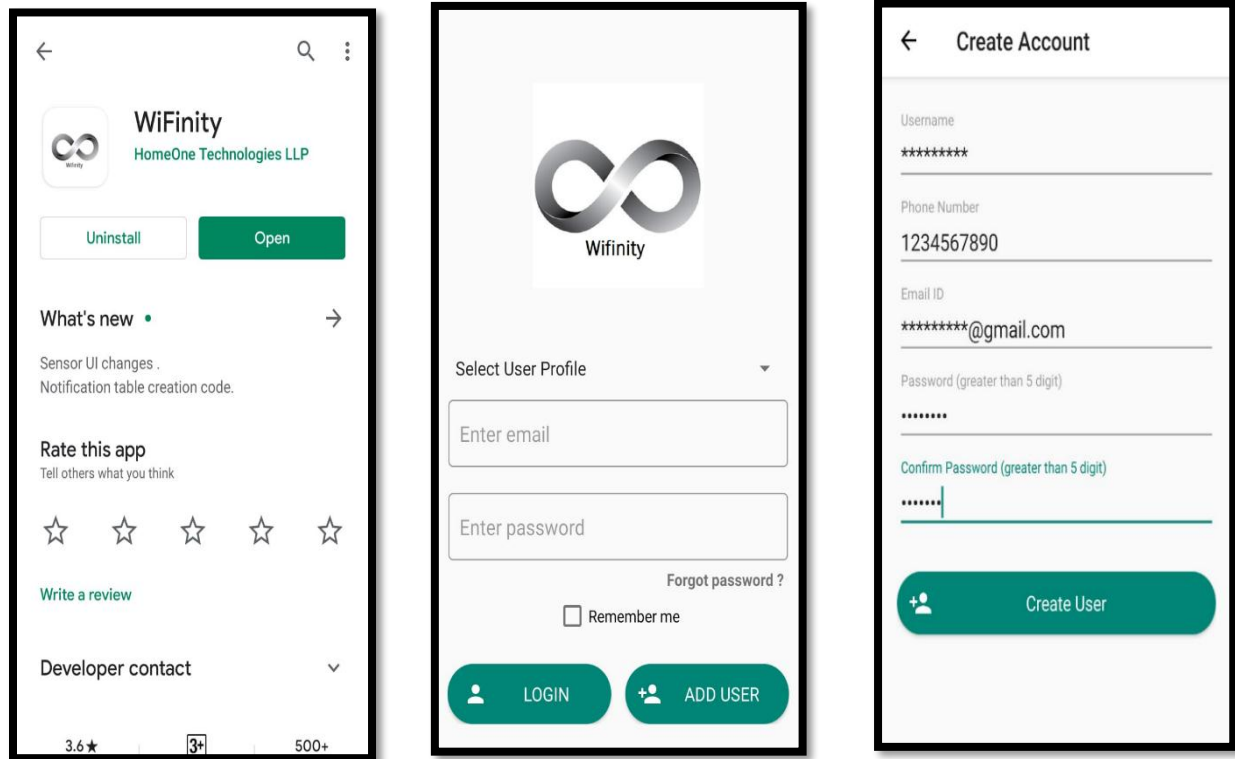
Step 3: Click on **Menu** Option—Select **Add Device**—Click on QR Code Icon to scan the **QR Code**—Find the **QR Code** Behind the Wi-Fi Smart Sensor.


Step-4: After Scanning QR Code Click on **NEXT**--Turn off your Phone internet and connect your phone Wi-Fi to Smart sensor Hotspot--Enter Password **12345678.**
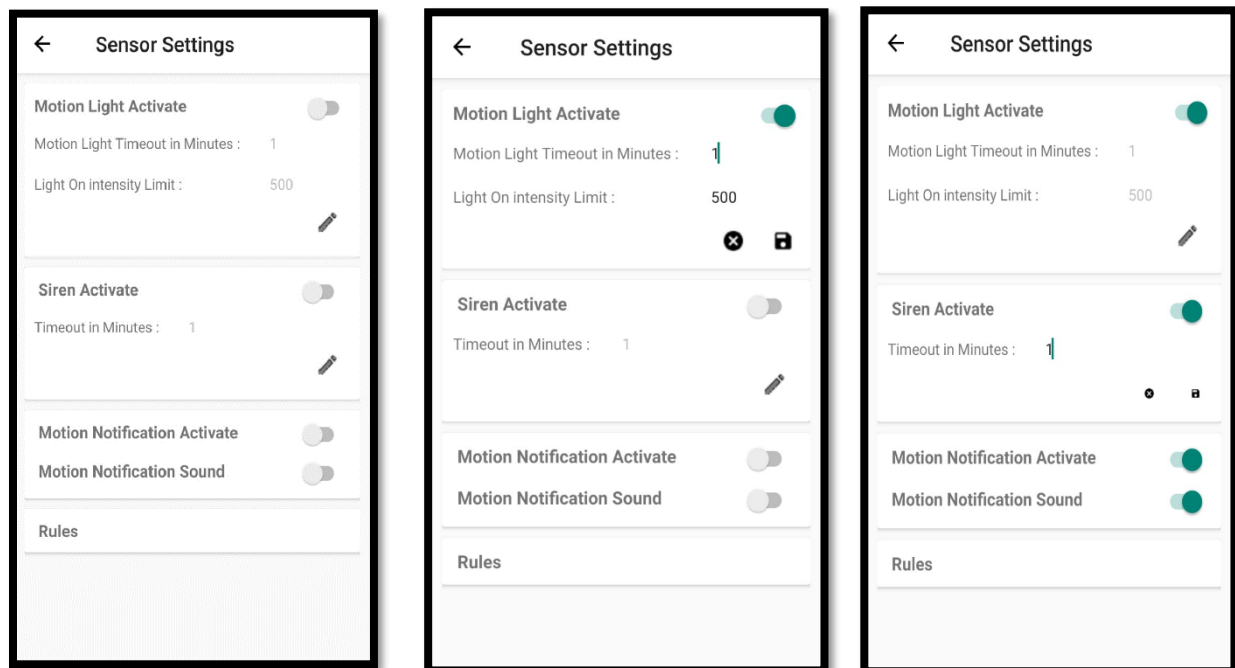
Step-5: After getting **green checkmark**, available **WIFI networks** will be displayed on screen. Select your respective **WIFI network,** enter desired **password** and click on **connect or click on** Device not listed? Enter Manually.
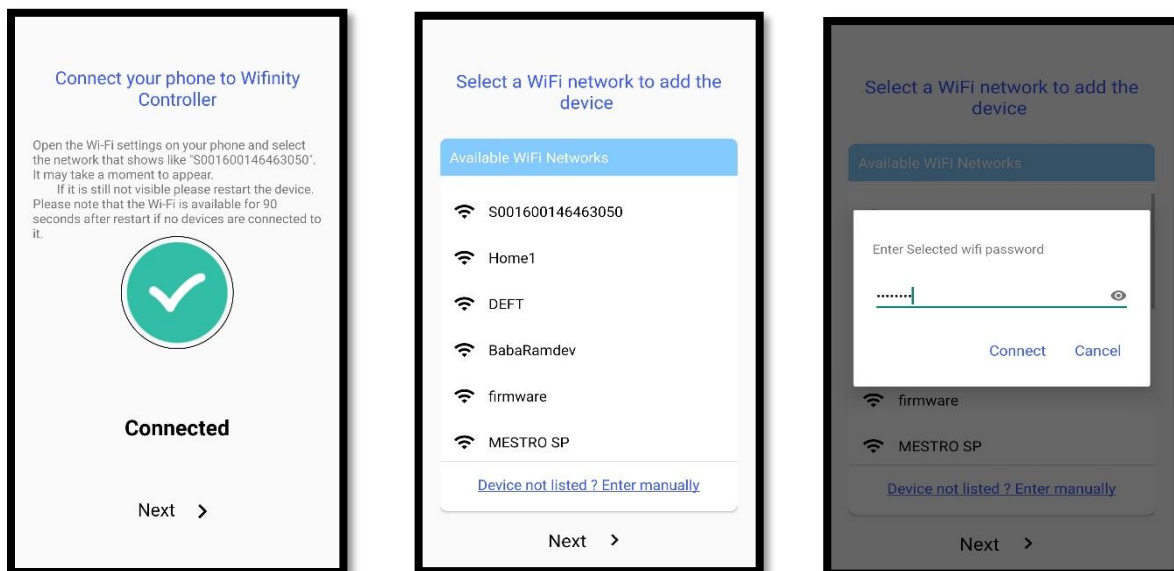
Step-6: Click on **Select Room**--**Add New Room**, Enter Your **Room Name** then click on **Submit,** Click on **Sensor Icon** to access sensor' Features-- Click on **Activate Switch** to Activate the sensor.
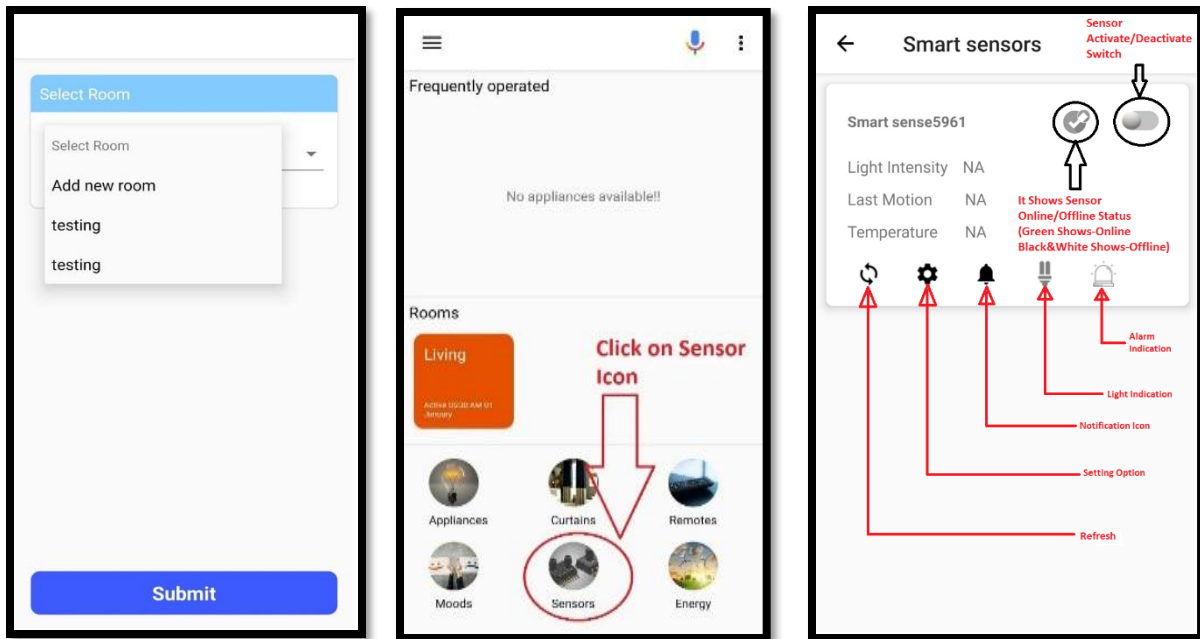
Step 7: Click on **Setting** Icon to **Activate** or **Edit** Smart Sensor Functions-Select **Edit** option to change **Timeout/Light Intensity**, similarly we can **Activate/ Deactivate Motion Notification & Sound** in this **Setting** option.

*** THANK YOU ***

HOMEONE
TECHNOLOGIES