Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)

Aim:

To verify Faraday's law of electromagnetic induction by determining and plotting the emf induced in a multi-turn loop due to (i) a time-varying magnetic flux density (transformer emf), (ii) conductor motion in a magnetic field (motional emf) and (iii) loop rotation (generator emf), and to confirm the polarity of the induced emf using Lenz's law.

Objectives:

1. To compute the magnetic flux linkage of a multi-turn loop placed in a sinusoidally varying magnetic flux density.

2. To determine the induced emf from emf = −N dΦ/dt both numerically and analytically and compare the two results.

3. To determine the motional emf of a conductor moving in a magnetic field and the emf generated by a rotating loop.

4. To investigate the effect of frequency, number of turns, velocity and angle on the induced emf.

Test Case (i) – Transformer EMF Induced by a Time-Varying Flux Density

```
clc;

clear;

close all;

N = input('Enter number of turns N: ');

A = input('Enter loop area A (m^2): ');

B0 = input('Enter peak flux density B0 (T): ');

f = input('Enter frequency f (Hz): ');

w = 2*pi*f;

t = linspace(0,2/f,2001);


dt = t(2)-t(1);
```

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)

```
B = B0*sin(w*t);
flux_link = N*A*B;
emf_num = -gradient(flux_link,dt);
emf_th = -N*A*B0*w*cos(w*t);
Em = N*A*B0*w;
disp('Peak induced emf (V) =');
disp(Em);
disp('RMS induced emf (V) =');
disp(Em/sqrt(2));
dev = max(abs(emf_num(2:end-1) - ...
    emf_th(2:end-1)))/Em*100;
disp('Maximum deviation (%) =');
disp(dev);
figure;
subplot(2,1,1);
plot(t*1e3,flux_link,'LineWidth',2);
grid on;
xlabel('Time (ms)');
ylabel('Flux linkage (Wb-turn)');
title('Flux linkage');
subplot(2,1,2);
plot(t*1e3,emf_num,'b','LineWidth',1.5);
hold on;
```

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)

```
plot(t*1e3,emf_th,'r--','LineWidth',1.5);
grid on;
xlabel('Time (ms)');
ylabel('Induced emf (V)');
legend('Numerical','Analytical');
title('Induced emf from Faraday law');
```

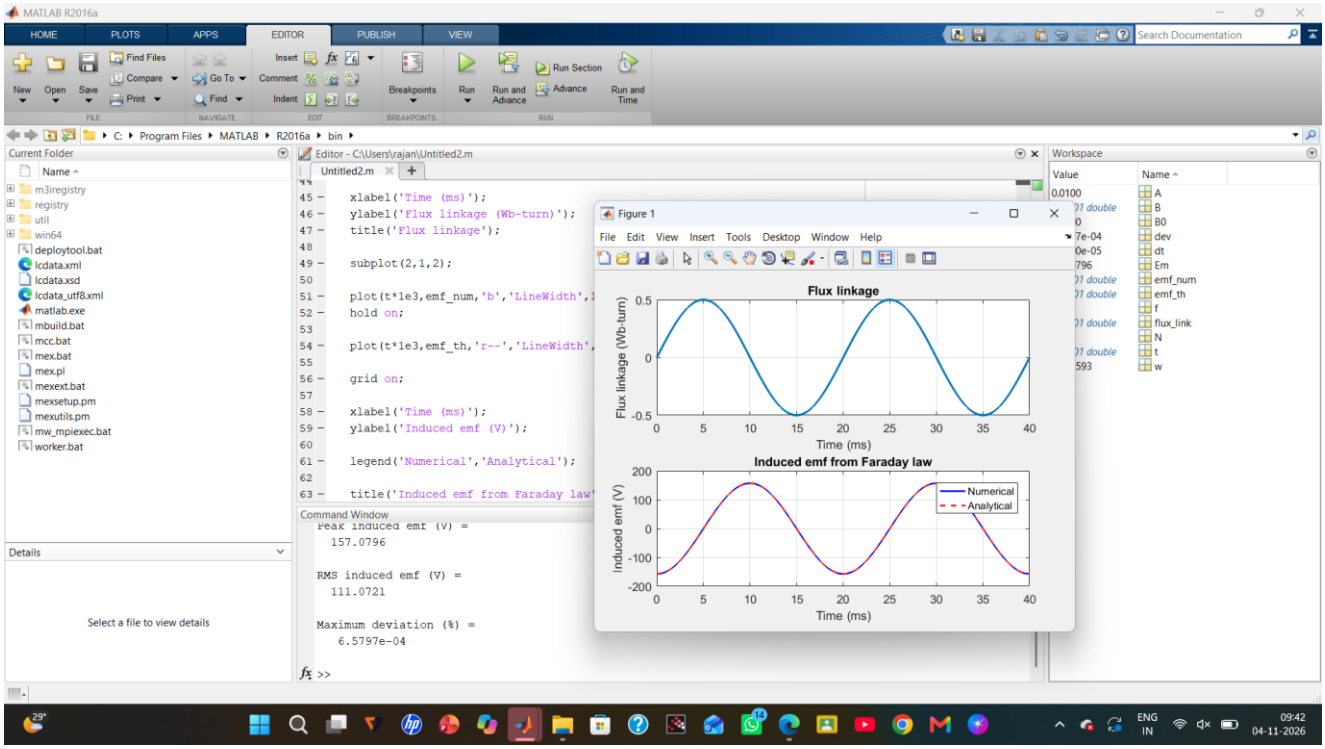


Test Case (ii) – Motional EMF of a Conductor Moving in a Magnetic Field

```
clc; clear;
B  = input('Enter flux density B (T): ');
l  = input('Enter conductor length l (m): ');
u  = input('Enter velocity u (m/s): ');
th = input('Enter angle between u and B (deg): ');
emf = B*l*u*sind(th);
disp('Motional emf (V) ='); disp(emf);
```

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)

```
uv = linspace(0,20,100);
emf_u = B*l*uv*sind(th);
subplot(1,2,1);
plot(uv,emf_u,'LineWidth',2); grid on;
xlabel('Velocity u (m/s)'); ylabel('Motional emf (V)');
title('emf versus velocity');
thv = linspace(0,180,181);
emf_a = B*l*u*sind(thv);
subplot(1,2,2);
plot(thv,emf_a,'LineWidth',2); grid on;
xlabel('Angle between u and B (deg)'); ylabel('Motional emf (V)');
title('emf versus angle');
```

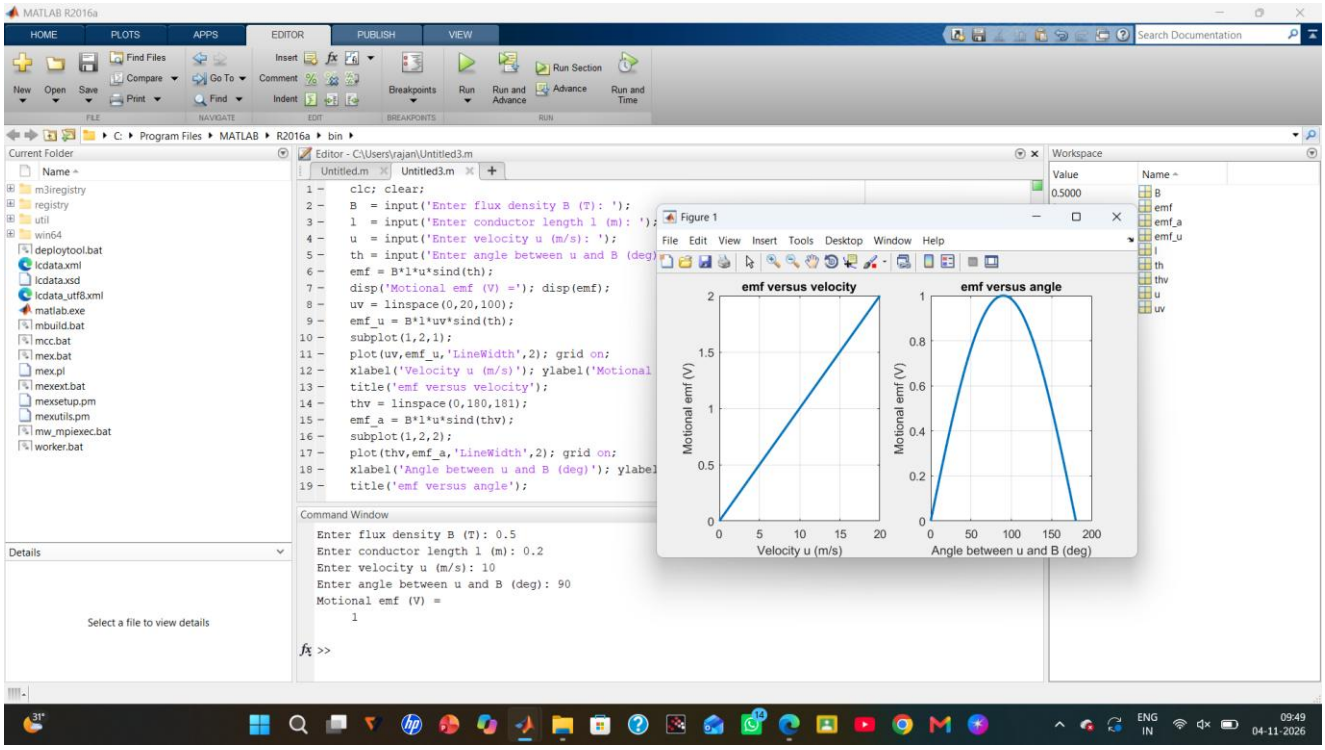


Test Case (iii) – EMF of a Rotating Loop (Generator Action)

```
clc; clear;
```

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)


```
N = 100; B = 0.5; A = 0.01; rpm = 1500;
w = 2*pi*rpm/60;
f = w/(2*pi);
t = linspace(0,2/f,1000);
emf = N*B*A*w*sin(w*t);
Em   = N*B*A*w;
Erms = Em/sqrt(2);
fprintf('Frequency f = %.2f Hz\n', f);
fprintf('Peak emf = %.2f V\n', Em);
fprintf('RMS emf = %.2f V\n', Erms);
plot(t*1e3,emf,'LineWidth',2); grid on;
xlabel('Time (ms)'); ylabel('Induced emf (V)');
title('EMF of a rotating loop');
```

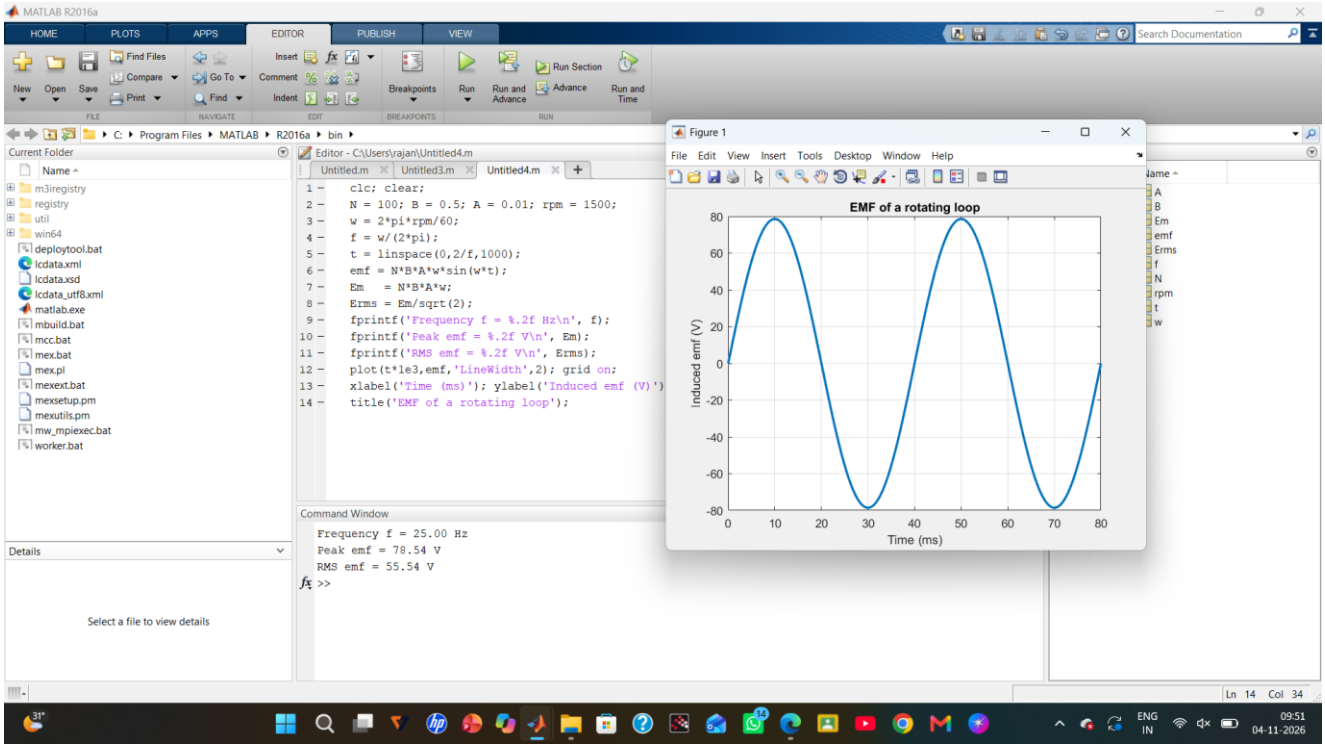

Test Case (iv) – Effect of Frequency and Number of Turns on the Peak EMF

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)

```
clc; clear;
A = 0.01; B0 = 0.5;
f  = linspace(10,100,100);
Nv = [50 100 200];
hold on;
for k = 1:3
Em = Nv(k)*A*B0*2*pi*f;
plot(f,Em,'LineWidth',2);
end
grid on;
xlabel('Frequency f (Hz)'); ylabel('Peak induced emf (V)');
title('Peak emf versus frequency');
legend('N = 50','N = 100','N = 200');
```

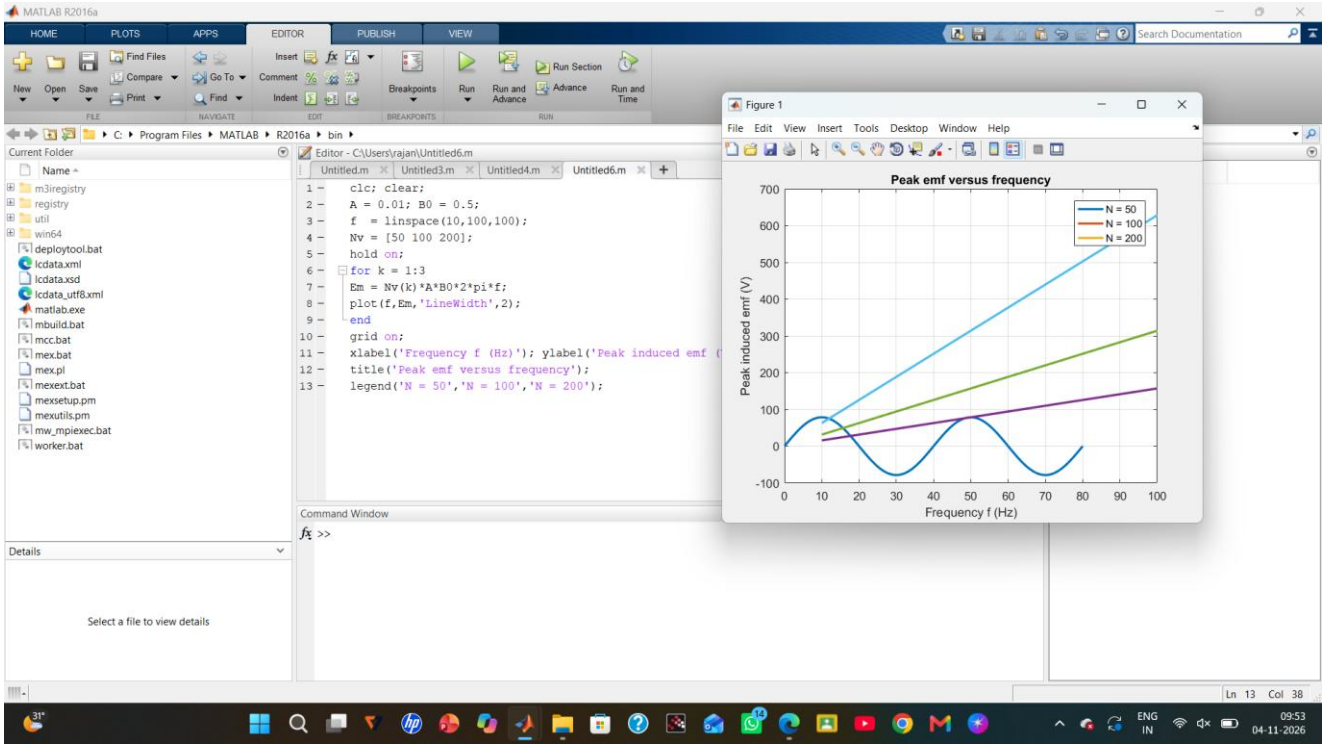

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)

S. No.	Objective	Assessment Criterion	Excellent – 4	Good – 3	Satisfactory – 2	Needs Improvement – 1	Weighting (%)	Marks given	Marks obtained
1	Identify induction mechanis m and parameters	Identify induction mechanism and parameters	Correctly identifies flux change/turns for transformer EMF and B, length, velocity/orie ntati on for motional EMF.	Identifie s most paramet ers correctl y.	Some parameters or directions are unclear.	Uses an incorrect physical model.	25	2.5	
2	Calculate induced EMF in MATLAB	Calculate induced EMF in MATLAB	Implements the applicable Faraday and motional EMF equations correctly with units/sign convention	Calculat ions are mostly correct with minor errors.	Some calculations require assistance.	EMF calculations are incorrect.	25	2.5	
3	v Plot and verify EMF behaviour	Plot and verify EMF behaviour	Plots expected variation and verifies results against theoretical relations.	Plots and verificat ion are mostly correct	Plot or validation is incomplete.	No valid plot or verification.	30	3	
4	Interpret and document results	Interpret and document results	Distinguishe s transformer and motional EMF and provides clear tables/plots/c onc lusion.	Explana tion is correct with minor omissio ns.	Explanation is limited.	Results are not explained or documented.	20	2	
Tota l							100	10	

Exp. No: 10 Verification of Faraday's Law of Electromagnetic Induction – Determination and Plotting of Induced EMF (Transformer EMF and Motional EMF)