
Attendance Logger

An easy guide for lecturers. Students tap their ID card, and the device keeps the record.

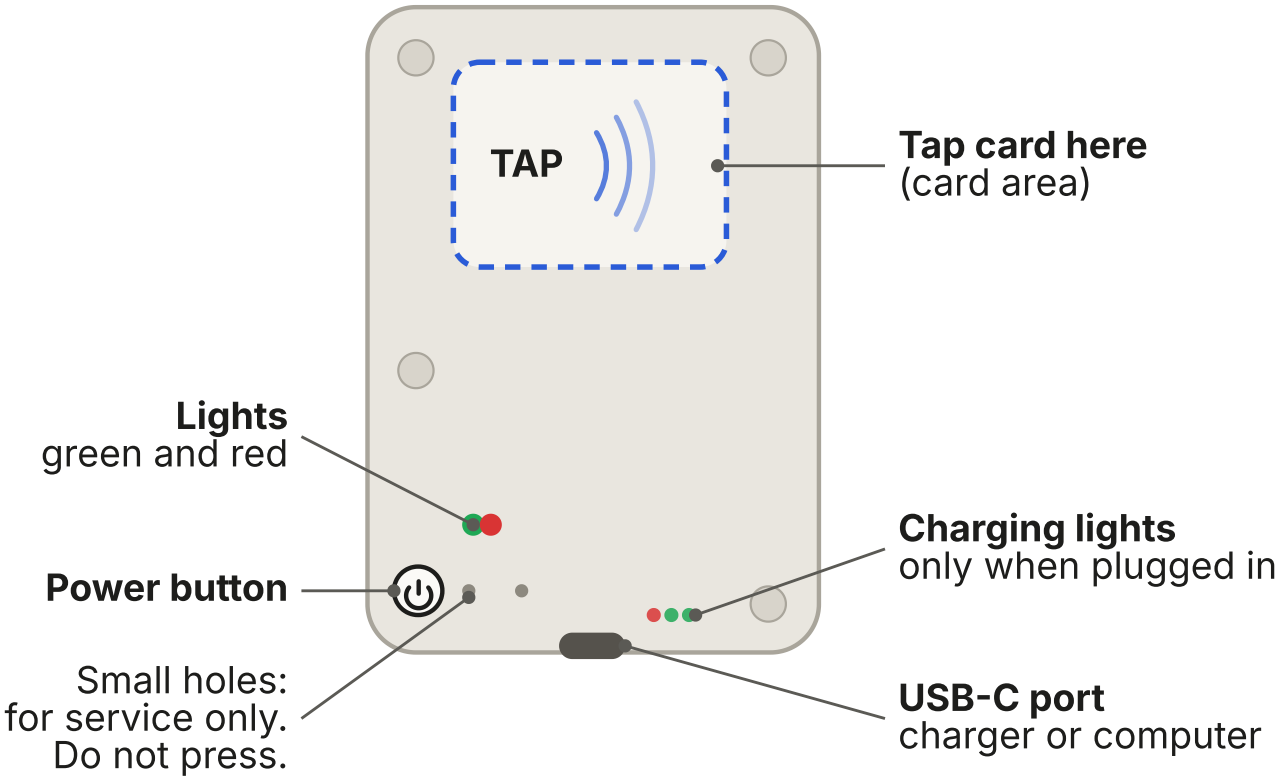

1 Taking attendance: 3 easy steps

1

Switch on

Press the power button once. You will see a **green light** and feel a short buzz.

2

Start the lecture

In the app, press **Start lecture**. No computer? **Hold the button for 2 seconds** until it buzzes, then let go.

3

Students tap

Each student holds the ID card flat on the card area until the device buzzes.

Before your first lecture: charge the device fully (section 6), install the app on your computer (section 9) and add your students (section 8). You only need to do this once.

2 How to tap a card



1. Hold the card **flat** on top of the card area.
2. Keep it there for about **one second**, until you feel the buzz.
3. Green light with one buzz means the student is **marked present**.


> Only one card at a time, please. Do not put two cards on the device together.

> Tapping again does no harm. The student is counted only **once** for each lecture.

3 What the lights and buzzes mean

YOU SEE / FEEL	MEANING	WHAT TO DO
🟢 ww	**Marked present.**	Nothing. Next student.
ww ww two short buzzes	Already marked in this lecture.	Nothing. It is not counted twice.
🟢 ww ww ww	A **new lecture** has started.	Students can tap now.
🔴 🔴 🔴 🔴 🔴 5 red blinks	**Battery is low.**	Charge it with a USB-C charger.
🔴 ww ww ww ww	**Memory is full.** The tap was not saved.	Connect to the computer and start a lecture from the app. This empties the memory.
🟢 ww ww after the computer	Settings saved. Taking attendance again.	Nothing.
🔴 ww ww ww after the computer	Settings not accepted. Nothing changed.	Start the lecture again from the app.
🔴 🔴 🔴 fast red, non-stop	The device has a fault.	Unplug, wait 10 seconds, try again. If it repeats, give it to the technical staff.

4 The power button

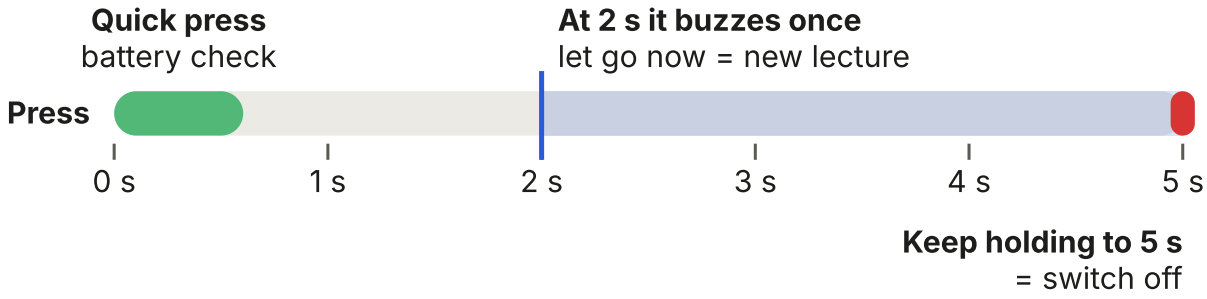

DO THIS	WHAT HAPPENS
Press once (device is off)	Switches on. Green light and a short buzz.
Quick press (device is on)	Shows the battery: 2 green blinks = OK, 5 red blinks = low.
Hold 2 seconds until it buzzes, then let go	Starts the **next lecture** (green and three quick buzzes). Everyone can tap again.
Hold 5 seconds	Switches off. Red light and a long buzz. No new lecture.
Press twice quickly (cable in, after Eject)	Brings the device back on the computer.

If nobody taps for **3 minutes**, the device switches itself off to save the battery. Just press the button to switch it on again. **All records are safe**, even when it is off.

5 Two lectures back to back

When one lecture finishes and the next one starts, **hold the power button for 2 seconds** until you feel a buzz, then let go. You will see green with three quick buzzes. Now the next lecture has started and every student can tap again.


The device names it for you: *Circuits Lecture 4* becomes *Circuits Lecture 5*. You can change the name later in the app.

If you do not start a new lecture, a student who already tapped in the last 6 hours will only get two buzzes and will not be counted again.


6 Charging

Use any **USB-C** phone charger, power bank or computer. The small lights near the USB port show the charging: **red** while charging, **green** when full. The device keeps taking attendance while it charges. A full charge lasts **many months** of normal use.

7 After the lecture: see who came

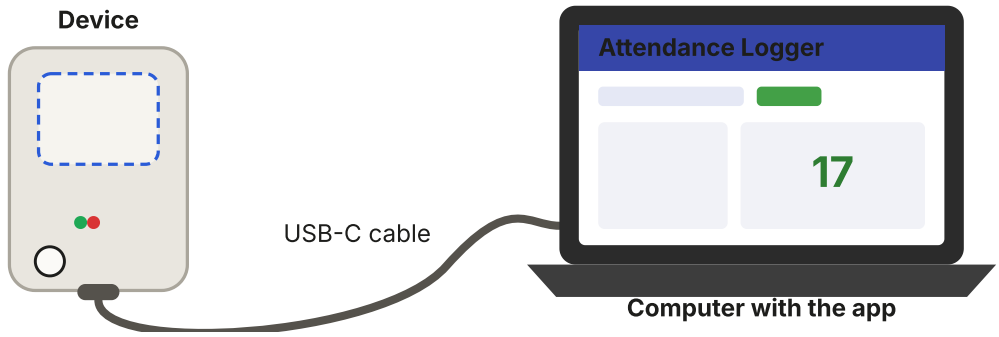

1. Connect the device to the computer with the **USB-C cable**.
2. Open the **Attendance Logger** app. It reads the device by itself. The top of the window says *Device connected* and shows the battery.
3. Click a lecture to see who came, with the time each student tapped.
4. Press **Save as PDF** or **Save list (CSV)** to keep or print the list.

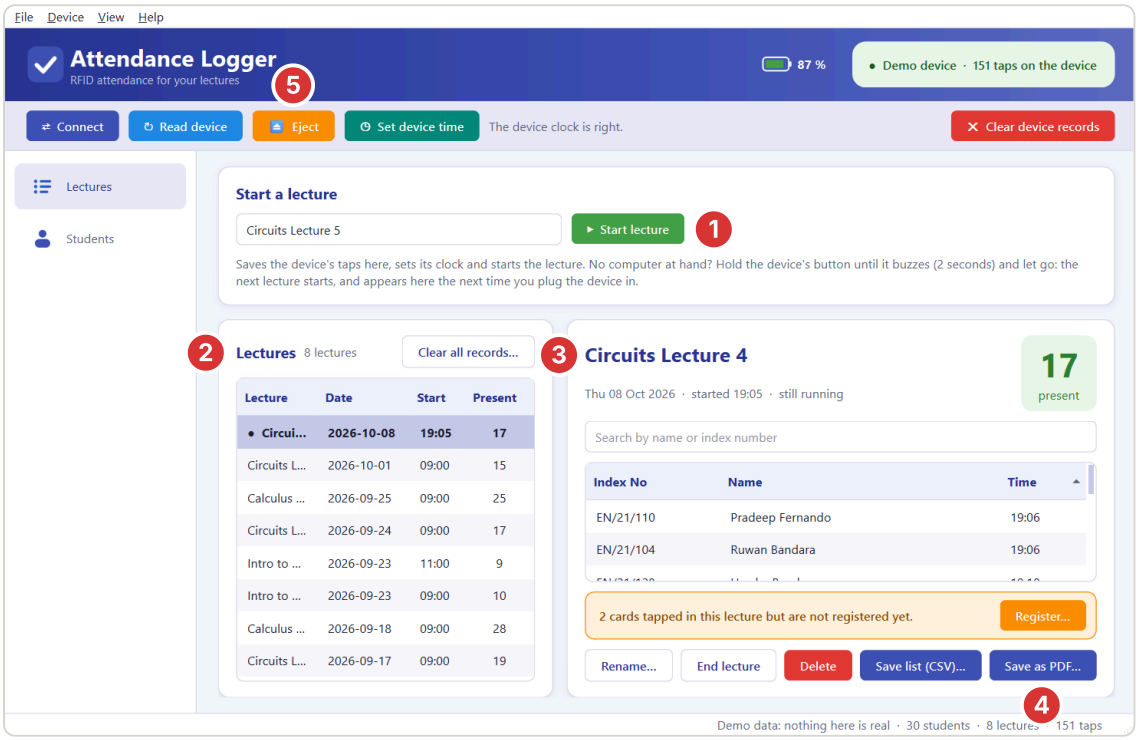

1. Type the lecture name, press Start lecture
2. All lectures
3. Who came, with the time
4. Save the list as PDF
5. Eject

While the device is connected to the computer, taps are not attendance. They are only for registering cards. To take attendance with the cable still in, press **Eject** in the app (or press the device's button once). Green with two buzzes means it is ready.

8 Adding a new student

1. Connect the device to the computer and open the app.
2. Go to the **Students** page and press **Tap a card...**
3. Tap the student's card on the device. The card number comes into the app by itself.
4. Type the **index number** and **name**, then press **Save**.

> Forgot to register a card before the lecture? No problem. The device saves every card. Register it later: the app shows it in the orange **New cards** box with a **Register...** button.

9 Installing the app (Windows)

1. Get the file **AttendanceLogger-Setup-1.0.0.exe** (from the project's GitHub page, folder *Companion/dist*) and double-click it.
2. If a blue window says *Windows protected your PC*, click **More info**, then **Run anyway**.
3. Click **Next** and **Install**. Then open **Attendance Logger** from the Start menu. No internet is needed.

10 Problems and quick fixes

PROBLEM	WHAT TO DO
No light when a card is tapped	The device may be off. Press the power button once. Hold the card flat, over the card area.
Device does not switch on	Battery may be empty. Charge it for some time, then try again.
App says *Device not connected*	Check the cable. If you pressed Eject before, press the device's button **twice quickly**, or unplug and plug in again.
A student is not on the list	The card may not be registered. Register it (section 8); the old taps then show under that student.
Wrong times in the list	In the app, press **Set device time**.

11 Please take care

Keep the device dry and away from heat. Do not drop it. Do not open the case. Do not press the small service holes. Keep it charged, and connect it to the computer at least once a week so the records are saved in the app.