


LUMINA IR-1

Contactless Infrared Thermometer | M5StickC Plus Edition

KEY FEATURES

- **Non-contact measurement**
Point and read - no skin contact required.
- **Dual-channel sensing**
Object temp and ambient temp read simultaneously.
- **Color-coded range bar**
Visual indicator spans the full -70 C to +380 C sensor range, segmented by zone: blue / teal / orange / red.
- **Celsius / Fahrenheit**
Toggle units instantly with Button A.
- **Flicker-free display**
Partial-update rendering - only changed pixels are redrawn.
- **FreeSans UI font**
Proportional typography for a clean, modern readout.

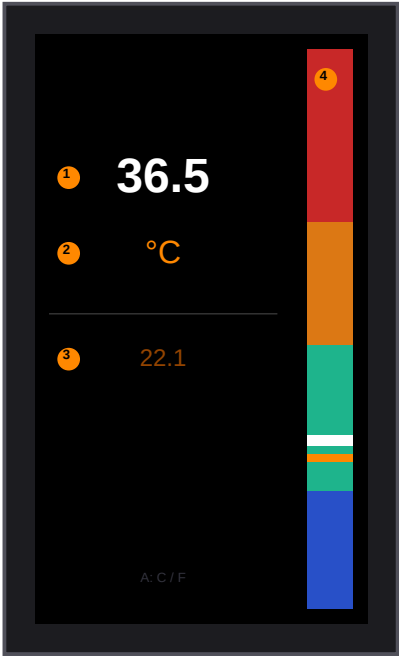

- 1 Object temp
- 2 Unit (C/F)
- 3 Ambient temp
- 4 Range bar

TECHNICAL SPECIFICATIONS

Sensor:	Melexis MLX90614ESF-BAA
Object temp range:	-70 C to +380 C
Ambient temp range:	-40 C to +125 C
Accuracy:	+/-0.5 C (0 to 50 C target range)
Resolution:	0.02 C
Interface:	I2C SMBus SDA GPIO0 SCL GPIO26
Host board:	M5StickC Plus (ESP32-PICO-D4, 240 MHz)
Display:	1.14" IPS LCD 135 x 240 px
Firmware stack:	Arduino / PlatformIO FreeSans font
Update rate:	~3 Hz (partial redraw, flicker-free)