

# Event-Driven Architecture

## *Software Architecture*

Richard Thomas

March 31, 2025

*Definition 0.* Event

Something that has happened or needs to happen.

*Definition 0.* Event Handling

Responding to notification of an event.

*Definition 0. Asynchronous Communication*

Sending a message to a receiver and not waiting for a response.

# Responsiveness

- Synchronous Communication
  - Send message
  - *Wait* for response
  - Continue processing



# Responsiveness

- Synchronous Communication



- Send message
- *Wait* for response
- Continue processing

- Asynchronous Communication



- Send message
- Continue processing
- *Optionally* receive response
- *Complex* error handling



### *Definition 0.* Event-Driven Architecture

Asynchronous distributed system that uses event processing to *coordinate* actions in a larger business process.

# Event-Driven Architecture





## Terminology

Initiating Event   Starts the business process

## Terminology

Initiating Event Starts the business process

Processing Event Indicates next step in the process can be performed

## Terminology

Initiating Event    Starts the business process

Processing Event    Indicates next step in the process can  
be performed

Event Channel    Holds events waiting to be processed

## Terminology

Initiating Event    Starts the business process


Processing Event    Indicates next step in the process can be performed

Event Channel    Holds events waiting to be processed

Event Handler    Processes an event

- Step, or part of a step, in the business process

# Auction Example

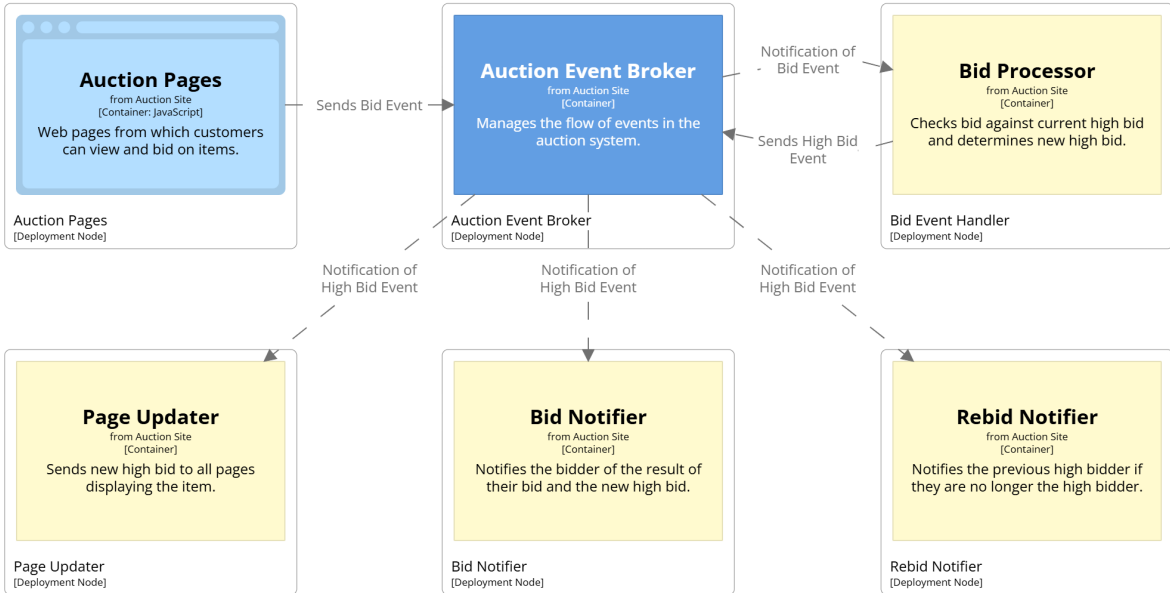

*Definition 0.* Event Handler Cohesion Principle

Each event handler is a simple cohesive unit that performs a *single* processing task.

*Definition 0.* Event Handler Independence Principle

Event handlers should not depend on the *implementation* of any other event handler.

# Auction Example – Error Handling





## Topologies

**Broker** All events received by event broker

- Notifies event handlers of events
- Event handlers send processing events when they finish processing

# Topologies


Broker All events received by event broker

- Notifies event handlers of events
- Event handlers send processing events when they finish processing

Mediator Manages business process

- Event queue of initiating events
- Event mediator sends processing events to event handlers
- Event handlers send async messages to mediator to report process finished


# Broker Topology

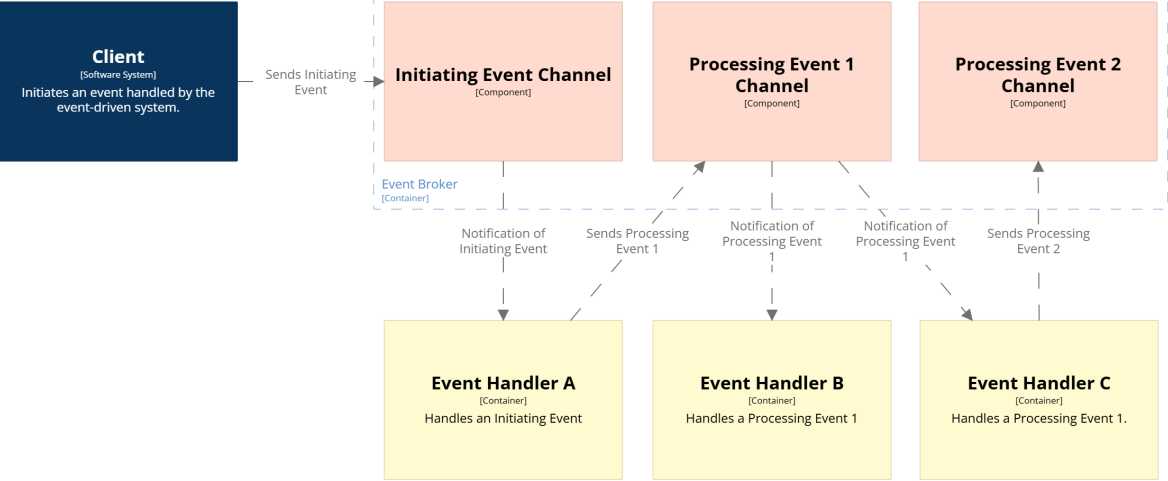

## *Event Broker Façade*

- Event handlers register to *listen* for events
- Receives events and *directs* them to the correct channel


# Broker with Façade Topology

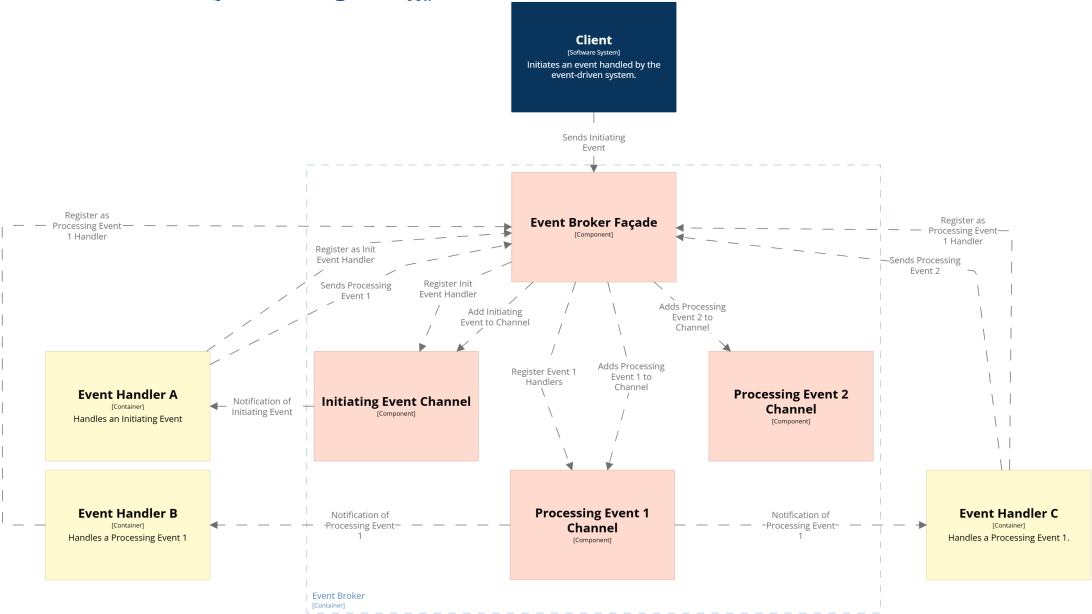

# Mediator Topology



# Sahara Mediator Topology

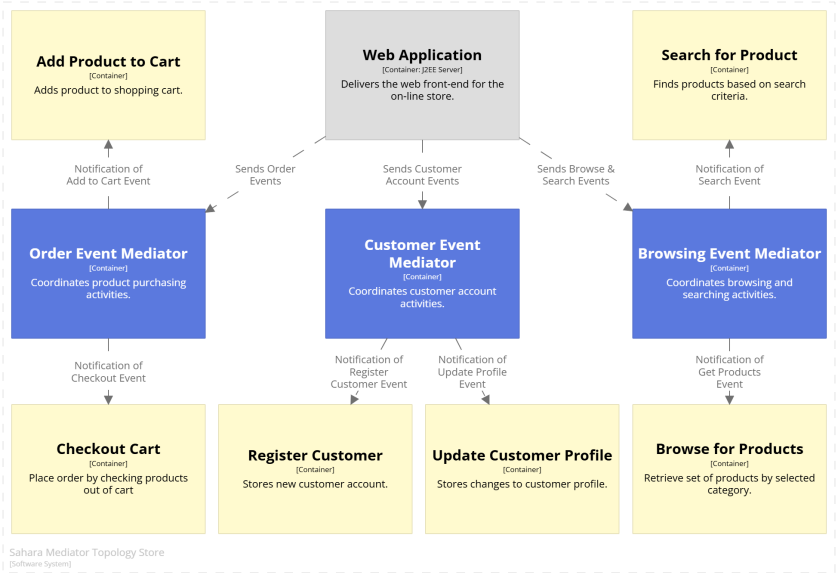

## Extensibility

- New behaviour for existing event
  - Broker** Implement event handler & register with broker
    - Existing ignored event hooks
  - Mediator** Implement event handler & modify mediator logic



## Extensibility

- New behaviour for existing event
  - Broker** Implement event handler & register with broker
    - Existing ignored event hooks
  - Mediator** Implement event handler & modify mediator logic
- New event
  - Broker** Implement event & event handler, create event channel, modify broker façade
  - Mediator** Implement event & event handler, modify mediator logic

## Scalability

- Event handlers deployed independently
  - Scaled independently to manage load

## Scalability

- Event handlers deployed independently
  - Scaled independently to manage load
- Event broker federated
  - Distributed across multiple compute nodes

## Scalability

- Event handlers deployed independently
  - Scaled independently to manage load
- Event broker federated
  - Distributed across multiple compute nodes
- Event mediators for different domains
  - Distributes loads by domain  
(e.g. browse & search, account, & order events)
    - Scaled independently to manage load

## Queues

- Channels can be implemented as queues
  - FIFO behaviour

## Queues

- Channels can be implemented as queues
  - FIFO behaviour
- Multiple front of queue pointers
  - For each event handler

## Queues

- Channels can be implemented as queues
  - FIFO behaviour
- Multiple front of queue pointers
  - For each event handler
- Event removed when event handlers finish
  - Retry if a handler fails

## Queues

- Channels can be implemented as queues
  - FIFO behaviour
- Multiple front of queue pointers
  - For each event handler
- Event removed when event handlers finish
  - Retry if a handler fails
- Events persist until removed
  - Recovery from broker failure



## Streams

- Channels can be implemented as streams
  - Events are saved permanently

## Streams

- Channels can be implemented as streams
  - Events are saved permanently
- Handlers notified when event added to stream
  - Observer pattern

## Streams

- Channels can be implemented as streams
  - Events are saved permanently
- Handlers notified when event added to stream
  - Observer pattern
- Handlers process events at their own pace
  - Cardiac arrest alarm vs. heart rate graph

## Streams

- Channels can be implemented as streams
  - Events are saved permanently
- Handlers notified when event added to stream
  - Observer pattern
- Handlers process events at their own pace
  - Cardiac arrest alarm vs. heart rate graph
- Events history
  - Redo processing
  - Review processing activities

## Queues vs Streams

- Queue
  - Known steps in business process
  - Easier sequencing of steps in business process
  - “Exactly once” semantics
  - eCommerce system

## Queues vs Streams

- Queue
  - Known steps in business process
  - Easier sequencing of steps in business process
  - “Exactly once” semantics
  - eCommerce system
- Stream
  - Very large number of events or handlers
  - Handlers can ignore events
  - Analysis of past activity
  - Event sourcing

## Broker vs Mediator Topologies

Broker dumb pipe

Broker events have occurred

## Broker vs Mediator Topologies

Broker dumb pipe

Broker events have occurred

Mediator smart pipe

Mediator events are commands to process



## Broker vs Mediator Topologies

### *Broker Advantages*

- Scalability
- Reliability
- Extensibility
- Low coupling

## Broker vs Mediator Topologies

### *Broker Advantages*

- Scalability
- Reliability
- Extensibility
- Low coupling

### *Mediator Advantages*

- Complex business process logic
- Error handling
- Maintain process state
- Error recovery

## Pros & Cons

Modularity Event Handlers



Extensibility



Reliability Event Handlers



Interoperability Events



Scalability Event Handlers



Security



Simplicity



Deployability



Testability Complex Interactions

