
IN3118HD Remote IR Information

Standard consumer IR (NEC framing) Device ID:0x4E87

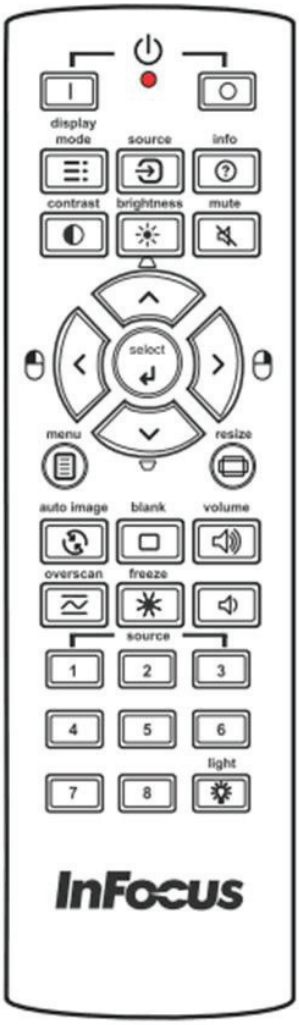

Code table(InFocus RC)

Key No.	Description	Data Code
1	Turns the projector on.	3Ah
2	Turns the projector off.	39h
3	Choose a suitable preset mode for usage environment.	2Ch
4	Toggle Input source selection.	10h
5	Display information OSD.	5Eh
6	Contrast adjusted key.	36h
7	Bright adjusted key.	03h
8	Audio mute.	59h
9	OSD menu Enter key.	32h
10	Up key selected when OSD on. Vkeystone+ key selected when OSD off.	13h
11	Down key selected when OSD on. Vkeystone- key selected when OSD off.	14h
12	Left key selected when OSD on. HID mouse Left button when OSD off.	11h
13	Right key selected when OSD on. HID mouse Right button when OSD off.	12h
14	OSD Menu key.	02h
15	Screen Aspect ratio hot key.	34h
16	PC(VGA) Auto adjusted key.	33h
17	Picture blank key.	31h
18	Adjusts volume up.	08h
19	Overscan adjusted key.	35h
20	Freeze video.	0Eh
21	Adjusts volume down.	04h
22	VGA	2Dh
23	HDMI 1	2Eh
24	HDMI 2	2Fh
25	S-VIDEO	30h
26	VIDEO	54h
27	Source-6	55h
28	Source-7	56h
29	Source-8	57h
30	LIGHT	

InFocus
Bright Ideas Made Brilliant