

Serverless Architecture

CSSE6400

Richard Thomas

May 23, 2022

Oxymoron 1. Serverless

Logic running on someone else's server.


Developers can focus on logic, not infrastructure to deliver it.

Definition 1. Backend as a Service (BaaS)

Cloud-hosted applications or services that deliver functionality used by an application front-end.

- Front-end may be a SPA or mobile app.
- Back-end provides sophisticated functionality (e.g. database, machine learning, location services, authentication, ...).
- Front-end ties back-end services together to deliver the application's functionality.

BaaS Example

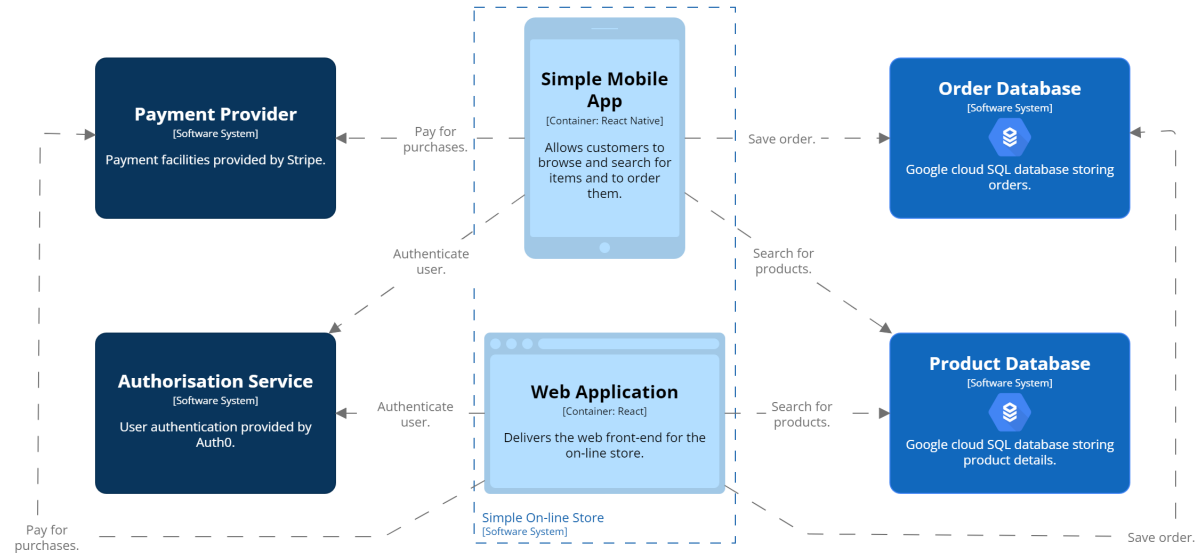


- Example of simple system with back-end functionality delivered entirely via BaaS.
- Feature-rich front-ends coordinate behaviour delivered by BaaS.
- Consequence: Front-ends are tightly coupled to BaaS.
- Consequence: Front-ends are have both UI and functional behaviour logic.
- Front-end could have a layered design, though many SPAs don't.

Definition 2. Functions as a Service (FaaS)

Application logic that is triggered by an event and runs in a transient, stateless compute node.

- Node may only exist for duration of function call.
- Server infrastructure (e.g. type of node, lifespan, scaling, ...) are managed by hosting provider.
- e.g. AWS Lambda, Google App Engine, Azure Automation,

FaaS Example

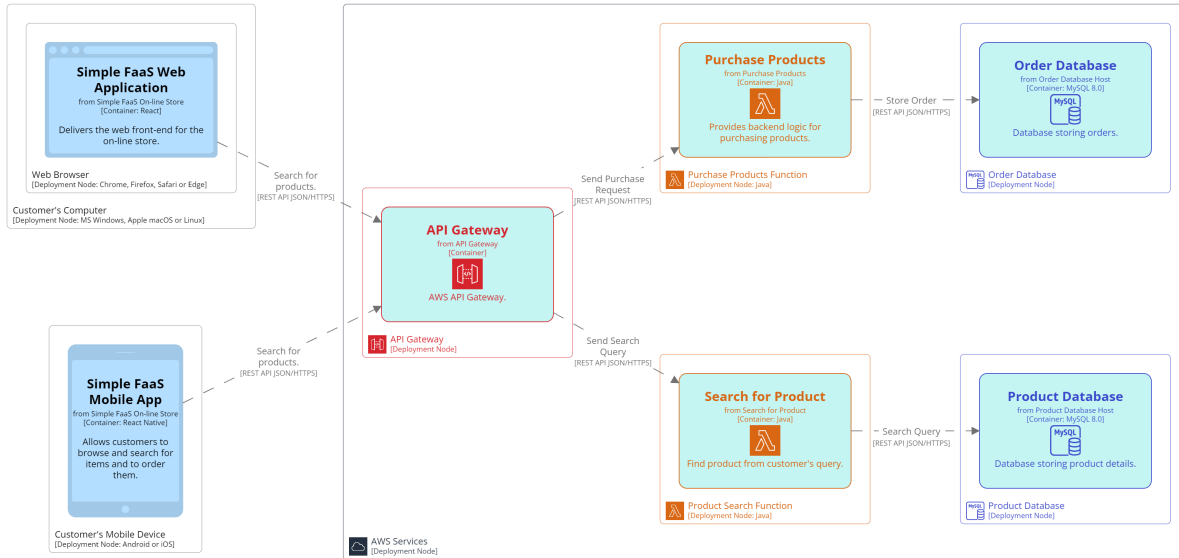


- Example of simple system with back-end functionality delivered entirely by FaaS.
- Feature-rich front-ends coordinate behaviour delivered by FaaS.
- Front-ends invoke functions via an API.
- API Gateway provides some separation between front-end and functions.
- May allow a bit more separation between UI and logic.

Definition 3. Serverless Architecture

Software system delivering functionality through BaaS or FaaS.

- Many people focus on FaaS when considering Serverless.
- Some simple Single Page Web Apps (SPA) coordinate.
- Front-end ties back-end services together to deliver the application's functionality.

Serverless Sahara eCommerce

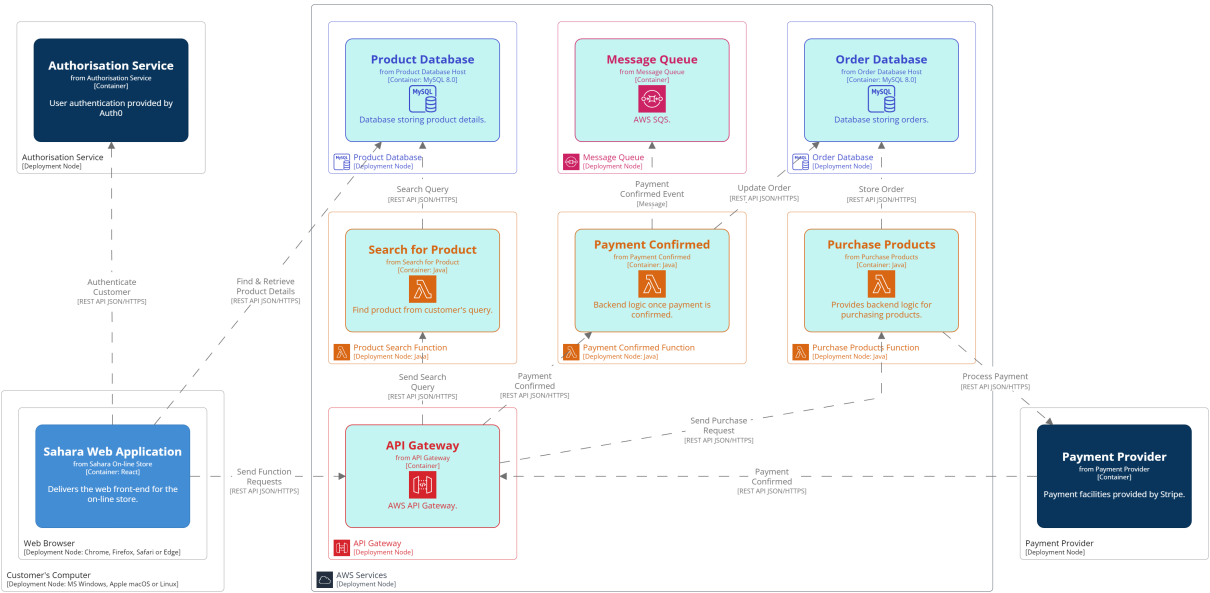

- Sahara eCommerce example as a serverless app.
- Only browse, search and purchase are shown.
- Should mention that shopping cart is within the web or mobile app.
- Payment Confirmation event added to Queue would be picked up by a fulfillment function to pack & send order.
- Once sent, another event would trigger an 'order sent' function.

Oil

Continue Sahara Example with Steps After
Diagram Above

Pros & Cons

Modularity



Extensibility



Reliability



Interoperability



Scalability



Security



Deployability



Testability



Simplicity

