PARHELION

A generator of trance

Version 1.3.0 · 1677 parameters · manual built 15.10.2026



Contents

1. About
2. Quick start
3. The panel
4. The track and the set
5. Sounds and presets
6. Arrange
7. Low End
8. Drums
9. Synths
10. Keys
11. Orchestra
12. Effects
13. Mixer and Master
14. Perform
15. Export and cues
16. Style
17. With a DAW and other apps
18. Meta Quest
19. The command line

About

Parhelion composes, mixes and plays trance: tracks of two to fourteen minutes and DJ sets of up to twelve hours, in which the tracks follow one another on two decks as a DJ would mix them. Nothing is played back from a recording and no neural network makes a sound. The kick, the sub and the rolling bass, the 303, the twelve lanes of the kit, the six voices of the supersaw synthesiser -- lead, counter, pluck, arp, pad and stab --, the physically modelled piano, the bowed strings, the choir, the brass and the timpani, the risers and impacts are synthesised; the rooms, the plate and the hall are simulated; and every section, every note and every move of a knob is decided by the composer.

Five style profiles span the genre: Uplifting (the anthem with its long breakdown, and, now and then, an orchestra -- Cinematic), Progressive (the plateau that rises in layers), Dream House (the piano motif over a bass that never stops), Acid (the 303 carrying bass and melody, its filter the drama) and Deep (the pad as the instrument, a grain cloud over it). Any two can be blended. Every recipe was fitted against measurements of thirty reference tracks: their tempo and length, the share and length of their breakdowns, how far the drop rises over the breakdown, their loudness and its range, their spectral balance and their width.

The same seed always gives the same track. A track is a seed, a style, a length and a handful of rerolls, which is what a set file stores and what you can hand to someone else. The standalone and the plugin play what the offline renderer plays, sample for sample, whatever the block size.

A parhelion is a sun dog: the bright spot beside the sun, on the halo of ice crystals, that shines with the sun's own light. In trance the drop is the sun; everything before it is the halo.

Quick start

The standalone plays by itself: press Play. Beside the key, choose what Parhelion writes: a single Track or a DJ mix, and its Length beside them (a track 2 to 14 minutes, a mix 10 minutes to 12 hours). A click on either composes it at once; Compose (it reads "Compose track" or "Compose mix") writes another with the knobs as they stand, and is lit while what plays is the other kind; the die draws a fresh seed. The status line begins with what plays -- "single track" or "DJ mix of 6 tracks" -- and tells its style and form, its tempo, its key with the Camelot label a DJ mixes by, and its length. While a track begins to play, Parhelion measures it in the background: each voice is set against the kick in a window of its own, every breakdown against the drop by the distance the style's references keep, every build a little under the drop, and the drop to the style's loudness. The status says "levelling" until the corrections have glided in.

A DJ mix (a set: the Set page names it so) is a dramaturgy of energy and tempo, tracks in neighbouring keys on the Camelot wheel, the incoming track's intro under the outgoing track's outro, the bass swapped on the mixer's isolator, the next track's hook teased on the third deck. Its first track may open on its atmosphere, as a track alone does -- nothing is mixed into it --; every other track opens with its DJ intro, the kick and the hats from the first bar.

In a DAW, Parhelion is an instrument plugin that follows the host's transport: it plays when the host plays, jumps when the host jumps, and plays at the host's tempo (a set's own tempo drift is the standalone's and the export's). Its output is a finished stereo mix, its loudest 20 seconds at the style's loudness (-8 to -10 LUFS, as the references) and its true peak under -1 dBTP.

A reroll draws one part of the track again and leaves the rest as it was: the form, the layer matrix, the energy, the harmony, the motif, the lead, the bass, the 303, the arp, the pluck, the piano, the orchestra, the drums, the effects, the sounds. In a set the rerolls act on the track under the playhead, and "reroll the whole track" or "reroll the mix's plan" draw more at once (the Arrange page).

The panel

Parhelion shares its panel with the other generators of the family -- Phosphene, Ephemeris and Totality (and, in part, Noctuary) -- so that what is learned on one holds on the others: the same places, the same keys, the same controllers, the same hands. Each keeps its own colours, its own letters and the picture behind its panel (Settings > Picture behind the panel takes it away).

The header's first row: the logo, the style, the key and the scale, what is composed and its length, Compose, the die (a new seed), Play and the speaker (mute). Its second row: the thumbs -- a verdict on what plays, for the curation --, the status line, and at the right Undo, Redo, Help and the settings. Under the header the whole track or set at a glance; a click jumps there. The tabs come in one order everywhere: Set, Arrange, the instrument's own pages -- a page of several has small tabs of its own --, Mixer, Perform, Export, Style.

The unambiguous actions are icons since 03.10.2026, their words in the tooltips: the die draws a new seed, the triangle plays and the square stops, the speaker mutes (crossed out while muted), the disk saves a set and the folder loads one (Export).

The ways around the panel (15.10.2026, the family's). The magnifier at the right of the header (Ctrl+K) opens the search: a few letters find any knob -- its page opens, its section or lane comes to the front and it lights up; a number after its name sets it ("cutoff 800") --, any preset of any synth, a page or an action. The line along the bottom of the window says what the control under the mouse is: its value now, its range and default, where the score plays it, what moves it, its MIDI controller and its key. Each synth's presets have a magnifier of their own, the browser: by name, by group, the starred and the recently played; hold a row's triangle to hear it, double-click to take it. The disk beside saves the sound as a preset of your own (Documents/Parhelion/Presets), listed under Yours, and a star says that the knobs have moved from the preset. A knob a voice's modulation moves wears an arc round it for every row of the matrix on it -- the span the row can move it over, in its source's colour; a right click lists those rows, each with its depth to drag and a button to take it out, and offers every source (Modulate with: a row in the first free slot, a quarter of the target's span); an Alt-drag on such a knob sets its last row's depth (up deeper, down the other way). The first steps show the panel on the first start (Settings > First steps, again). The standalone's window comes back where it was left -- its place, its size, maximised or not --, and its audio settings offer ASIO (Windows).

A page taller than the window shows its groups in sections, one at a time, with a switch at its top right: a synth's sound and its modulation apart (Sound, Modulation), and where even those do not fit, cut further, each named after its first group (Filter, LFO, Matrix ...). At the window's usual size, 1280 by 860, no page scrolls. The overview above the tabs can be folded away in the settings; the pages then get its height.

A colour says what a control does, the same on every page and in every generator of the family: the sources, the filters, the envelopes, what moves by itself, the room and the mix. A knob the composer moves has a thin ring round it that shows where it stands at this moment. A double click sets a control to its default; a right click offers MIDI learn, forgetting the controller, and the default.

Undo and Redo take back and bring back what was changed -- a knob, a new seed, a reroll, a preset, a loaded set -- one step at a time; the button's tooltip names the step. Help opens this manual by topic, with the page in front, the keys and the headset as topics of their own. The settings hold the update check (it asks GitHub once a day whether a newer Parhelion is out; nothing else is sent), the picture behind the panel, the overview, the headset, the window's size, full screen, the keys and About.

```
Space                 play / stop
Ctrl+Z                undo
Ctrl+Y, Ctrl+Shift+Z  redo
F1                    help
F11                   full screen (the standalone); Esc leaves it and closes the help
Ctrl+S, Ctrl+O        save the set, open one
Ctrl+E                export
Ctrl+K                search: any control, preset, page or action
```

The controllers every generator of the family listens to without learning: controller 74 (brightness) moves the master filter, 11 (the expression pedal) the echo throw; the mod wheel drives the voices' modulation and channel pressure their pressure (Perform).

The headset. The controls of a Meta Quest's hands are shown only while a headset sends them -- or always, if the settings say so (Headset > Always show them); Off stops listening. The Quest app sends its hands to this computer in bridge mode: bridge_host = this computer's address in its parh.cfg (audio=0 leaves the headset silent), and Parhelion listens on port 9104. The hands mean the same in every generator of the family, on the headset alone and here:

```
left pinch            play / stop
both hands pinched    the next track (or set)
right pinch           kick out / kick in
right pinch held      Breakdown now, or Drop now in a breakdown, a break or a build
left hand up, down    the master filter: low pass below the middle, high pass above
right hand up         the echo throw
```

A pinch acts when it opens again, so a pinch of both hands is never also one of each; a hand moves its control only while it does not pinch, and both glide and are centred: a hand at mid height plays what was composed.

The track and the set



A track has one of five forms, and each style draws its own. The Anthem is Uplifting's: intro, groove, a short break and a first drop, the main breakdown of 32 to 64 bars with its tease, its peak and its build, the main drop, and now and then a second break and a final drop, the outro. The Dream is Dream House's, shorter, and the bass never leaves, not even in the breakdown. The Acid form has no long breakdown: one to three pauses of the kick of eight bars each, between grooves, and the main drop; its drama is the 303's filter. The Plateau is Progressive's: grooves and plateaus that add a layer at a time, short breaks between them, a breakdown of 24 or 32 bars. The Drift is Deep's, a long groove and plateau before the breakdown and the main drop. Every section is a multiple of eight bars and the whole a multiple of thirty-two; every 8-bar block changes something against the one before it; the bar before a drop empties -- the last beat, the last two, the whole bar, or the kick alone on four -- so that the drop lands.

The intro opens on an atmosphere. The pad plays from the first bar, filtered dark, and opens over the intro; the effects lay a long atmosphere under it (a swell of detuned saws and noise in the key) with reverse swells into the 16-bar lines, and in the intro's second half the arp's pattern ghosts through, filtered. Under that the DJ intro builds as a DJ needs it: the kick, the hats, the bass, the open hat, the percussion. A track that stands alone -- not in a set -- may open without the kick altogether, on the pad and the atmosphere (Progressive, Dream House and Deep often, Uplifting and Acid now and then); a set's tracks always start with the kick, so they can be mixed. How much sustained sound an intro carries was measured on the references (the sustained energy between 200 Hz and 5 kHz in the first 16 and 32 bars against the drop) and the intros are held to it.

The harmony: a key the profile favours (the roots from D to A most often), one of five progressions (i-VI-III-VII and its relatives; the major keys through their relative minors), the harmonic rhythm of the section, the VII in

the two bars before every drop and its resolution on i. Acid stays on its chord and moves a fourth or a fifth every 16 bars; the Cinematic tracks lift by a third after the second breakdown.

The melody is written from rules and from counts. The anthem's motif is long notes: a leap of a fourth to an octave after the first note, then down by steps, a chord tone on every beat, phrased A A' B A''; filtered sections hear only A, the main drop's second half an octave higher. The riff, the pluck's rhythm, the piano's line and the 303's bar are drawn from note statistics of order two, never from a melody itself, and every lead is checked two bars at a time against a fingerprint of 144 250 windows of known trance tracks and drawn again on a match.

Style picks the profile; Morph To and Morph blend it with a second one. With Auto the tempo and the key are drawn from the profile; without it the knobs decide. Length is the track's, rounded to whole 32-bar blocks. Humanize is the spread of the velocities and the timing. Composer's Sounds lets the composer choose a preset per synth for every track (the next chapter); Favor Ratings weighs what you rated (the Arrange page).

A set is a length in minutes and a dramaturgy -- Warm-up, Peak, Closing, Sunrise (from the deep end up into the light) and Journey (a long arc with two peaks) --, which draws the energy and the tempo of every track (the tempo moves by at most two BPM a track). Styles: Stay keeps the style of the knobs, Wander walks the ladder Deep, Dream House, Progressive, Uplifting, Acid with the energy. The keys walk the Camelot wheel: the same key, a fifth, the relative major or minor -- from major back to minor more often, trance lives in minor --, now and then an energy boost by one or two semitones. Every track of a set can be mixed: an intro and an outro of 32 bars or more, with a beat, never beatless.

The blend lays the incoming track's intro over the outgoing track's outro, 32 or 64 bars (Blend). The bass goes over on the isolator in one move, 16 bars before the incoming groove, never before the incoming bass; the DJ's hand works the faders and the filters. On deck C the next track's hook is teased, filtered, over the end of the one playing. Track Time is how long each track is heard on its own. The mixer's effects (djfx) are an echo and a hall that the breaks and the Perform page's throw send into.

COMPOSE

Control	Key	Range	Default
Tempo	`compose.bpm`	90 .. 150 BPM	138 BPM
Key	`compose.key`	C, C#, D, D#, E, F, F#, G, G#, A, A#, B	A
Scale	`compose.scale`	Aeolian, Dorian, Harmonic Minor, Minor Pentatonic, Phrygian, Ionian	Aeolian
Style	`compose.style`	Uplifting, Progressive, Dream House, Acid, Deep	Uplifting
Length	`compose.minutes`	2 .. 14 min	8 min
Auto	`compose.auto`	off / on	on
Morph To	`compose.morph_to`	Off, Uplifting, Progressive, Dream House, Acid, Deep	Off
Morph	`compose.morph`	0 .. 1	0.5
Composer's Sounds	`compose.pick_sounds`	off / on	on
Favor Ratings	`compose.use_ratings`	off / on	off
Humanize	`compose.humanize`	0 .. 30 %	8 %

SET

Control	Key	Range	Default

Dramaturgy	`set.dramaturgy`	Warm-up, Peak, Closing, Sunrise, Journey	Peak
Styles	`set.journey`	Stay, Wander	Stay
Blend	`set.blend`	32 bars, 64 bars	32 bars
Set Length	`set.minutes`	0 .. 720 min	0 min
Track Time	`set.track_minutes`	3 .. 10 min	6 min

DJFX

Control	Key	Range	Default
Echo Time	`djfx.echo_time`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/8
Feedback	`djfx.feedback`	0 .. 1	0.45
Echo Return	`djfx.echo_return`	-60 .. 6 dB	-3 dB
Hall Decay	`djfx.hall_decay`	0.5 .. 12 s	5 s
Hall Return	`djfx.hall_return`	-60 .. 12 dB	6 dB

Sounds and presets

Every synth has 1024 factory presets: the kick, the sub, the kit (by role), the bass, the 303, each of the six voices of the supersaw synthesiser (lead, counter, pluck, arp, pad, stab), the piano, the strings, the choir, the brass, the timpani, the effects and the grain cloud -- 18 banks, 18 432 sounds. Each bank has sixteen groups -- "Anthem Supersaw", "Classic 303", "Gated Pad", "Concert Grand" -- and each group sixty-four presets on an eight by eight grid: the rows an adjective from dark to bright, the columns a noun of the group's own, so the name tells where on the grid a sound lies. A preset is the sound with its modulation, not the mix: levels, sends, the pump and the notes stay where the mix and the composer put them. Each preset's loudness against the default sound was measured, and the composer trims it by that amount.


For every track the composer chooses a preset per synth (Composer's Sounds, compose.pick_sounds): a group by how well it suits the track's style -- the weights cubed, so that an Uplifting lead is mostly a supersaw --, a lane of the kit only among the groups made for its role, and in the group a row around the style's brightness (Uplifting brighter, Deep darker) and a column at random. The style then holds a few knobs in its own range. Reroll sounds draws other presets and leaves the notes as they are.

The knobs show what plays. When a track begins -- in a set, when the next track starts on its deck -- its presets are put on the knobs, and each voice's preset bar names the preset the composer chose; the Arrange page lists them for the whole track. Turn a knob and the sound follows from there; choose another preset from the menu, or step through them with the arrows, and it plays at once. In a blend each deck keeps its own track's sounds.

Save as user preset (the last item of the menu) keeps a sound of your own: every knob a preset sets, as it stands, goes under a name into Documents/Parhelion/Presets/<synth>, one "knob=value" a line, and appears in the menu under User. The twelve lanes of the kit share their folder, so a lane's sound loads into any lane. A user preset is the whole sound, as a factory preset is: a knob its file does not name (one edited out by hand) goes back to its default.

Every voice has the same modulation block: a modulation envelope, four LFOs (free or in time with the beat) and a matrix of eight slots, each a source, a destination and an amount. The sources: the envelope, the LFOs, velocity, the key, a random value per note, the mod wheel, channel pressure and the energy of the score, so that a voice can open with the track (the synthesisers add their filter envelope). The destinations are the engine's own: pitch, pulse width, wavetable position, FM index, cutoff, resonance, drive and detune for the synthesisers; hammer hardness for the piano; bow pressure, speed and position for the strings; vowel, formant, tension and breath for the choir; breath and brassiness for the brass; hardness, strike position and decay for the timpani; vibrato, level and pan for all of them. Most presets use a few slots; what the mod wheel does is the preset's.

Arrange

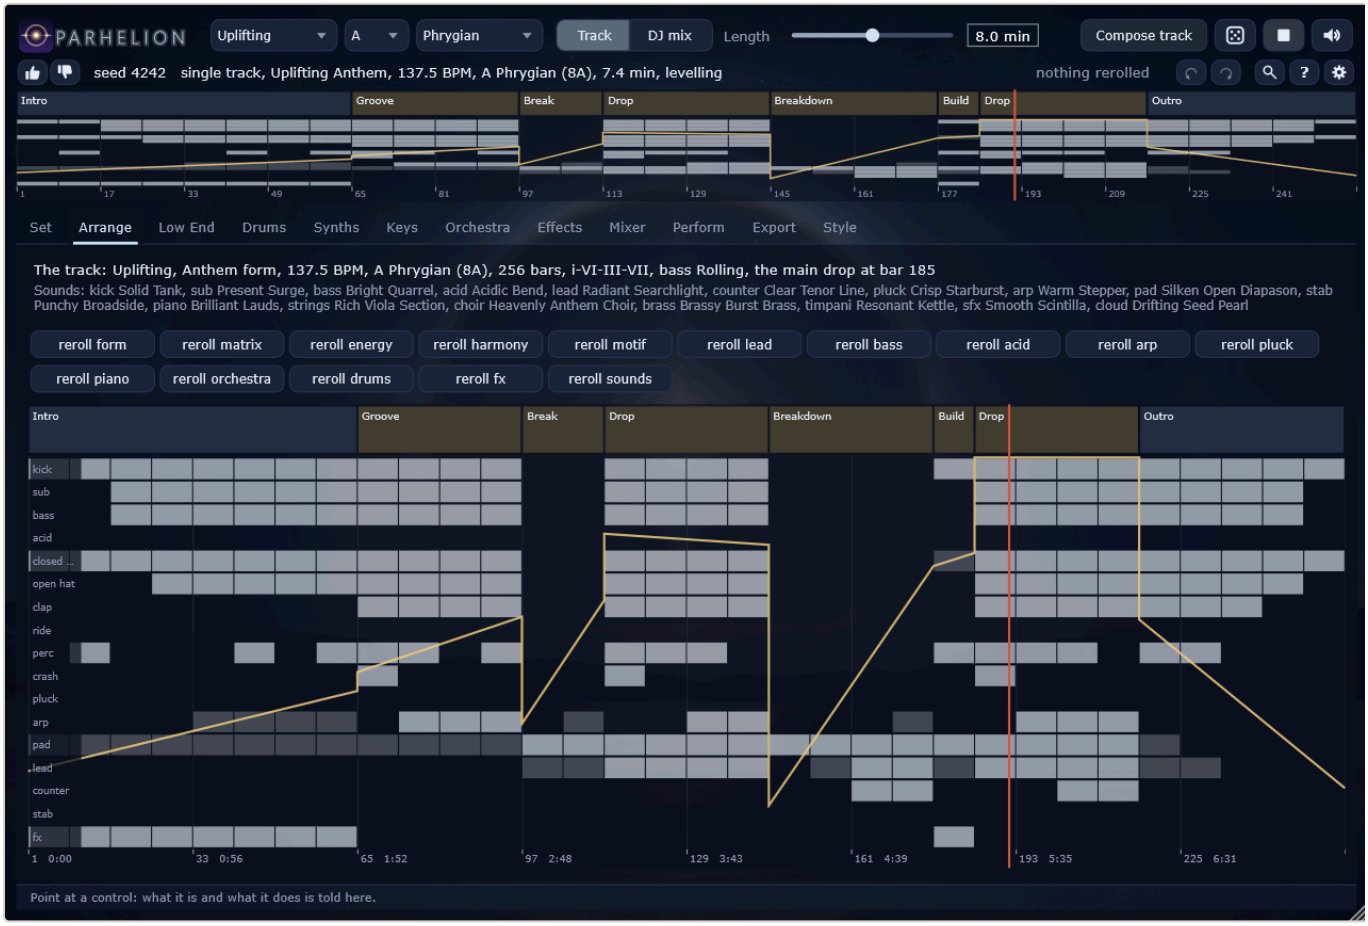


The arrangement across the whole length: in a track its sections by name, and under them a lane per layer -- kick, sub, bass, 303, the hats, the clap, the ride, the percussion, the crash, pluck, arp, pad, lead, counter, stab, effects --, bright where the layer plays open, dim where it plays filtered. Over them the energy curve the composer wrote. In a mix the tracks lie on decks A and B, their bass swaps marked, and the teases on deck C. Under it a ruler: a track's bars and their time, a mix's minutes. A click jumps there.

The mouse wheel zooms in around the pointer, down to four bars; drag, or turn the wheel with Shift held (or sideways), to move along; a double click shows the whole length again. Zoomed in, the notes themselves stand in the lanes -- every kick, every hat, the chords of the pad, the lead's line --, a bar under the ruler shows where the window lies, and the strip on top of the panel marks it too; when the playhead runs out of the window, the window pages on with it (not when you moved it away). The same works on the strip on top.



A DJ mix of forty minutes: its tracks on decks A and B, the ruler in minutes

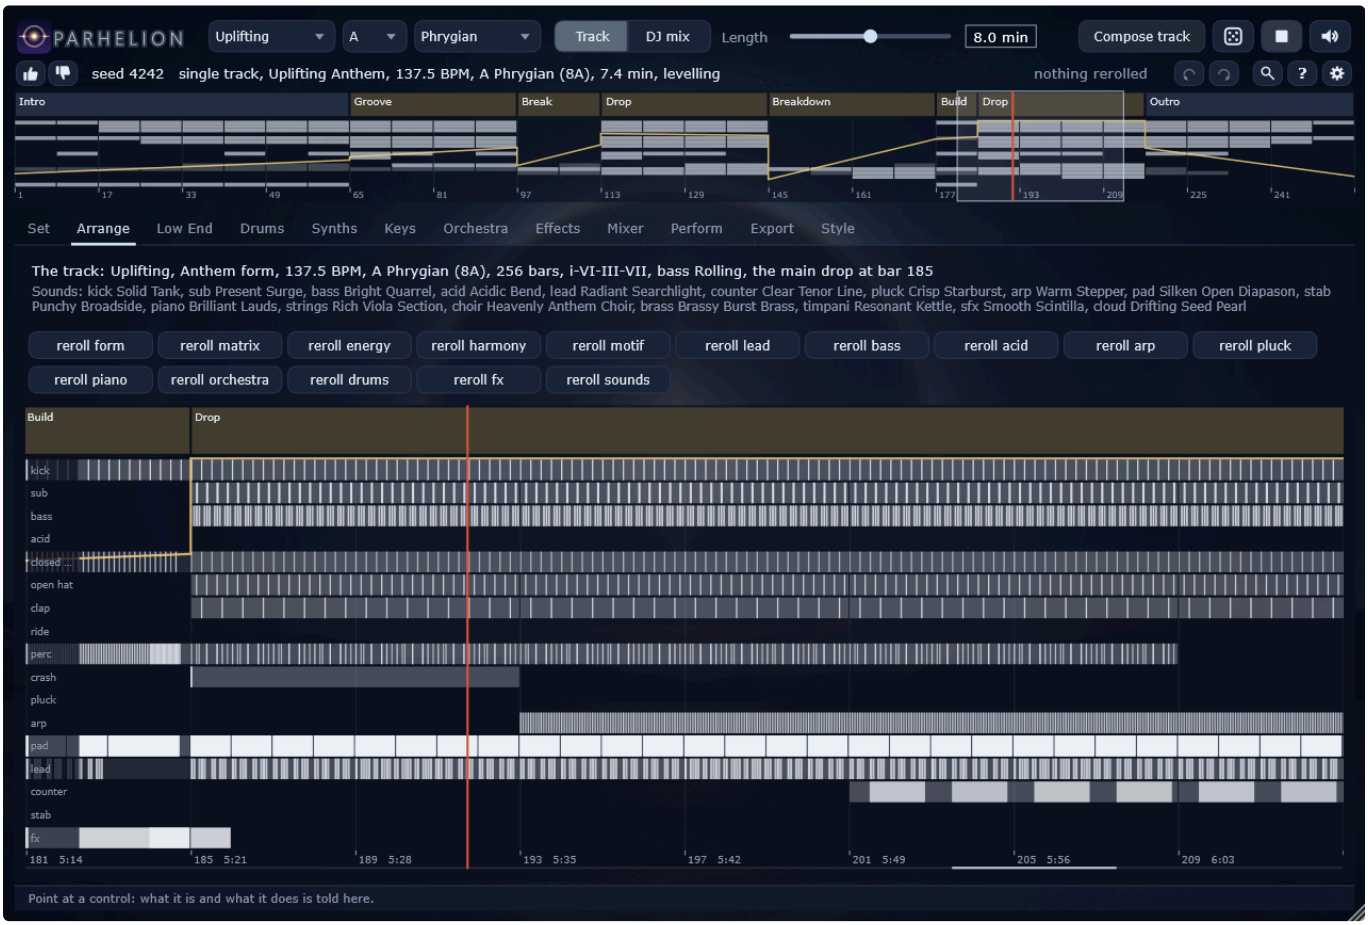

Zoomed in on a main drop: the notes in the lanes, the window marked on the strip on top

The line above names the style, the form, the tempo, the key, the progression, the bass figure, the main drop and, where there is one, the orchestra and the key change; the line below the preset of every synth.

The row of rerolls acts on the track under the playhead; each part is drawn from a stream of its own, so a reroll of the matrix keeps the harmony and the sounds, a reroll of the energy redraws the curve the pads' opening and the 303 follow, and a reroll of the motif writes another hook for the same form.

The + and - beside the status line rate the track under the playhead. The ratings are kept in Documents/Parhelion/ratings.tsv with the track's form and the groups of its presets; with Favor Ratings (the Set page) the composer draws the forms and preset groups you liked more often and the ones you did not seldom -- none is ever ruled out. A saved set does not carry the ratings: it plays back the same only with Favor Ratings off.

Low End


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Kick
Sub
Bass
Acid
Pump
KICK PRESET
Solid Tank
this track: Solid Tank (Classic Resonator)
ENGINE
Engine
Tune
Level
Drive
Clip
Resonator
Key
Soft
-2.90 dB
0.32
PITCH
Start
End
Body Decay
241 Hz
50.7 Hz
19.0 ms
PUNCH AND AMP
Punch
Punch Decay
Attack
Hold
Decay
Tail Limit
0.55
3.00 ms
0.20 ms
20.0 ms
417 ms
0.00 dB
CLICK
Click
Tone
Decay
0.26
3421 Hz
5.00 ms
TONE
Tone
Low Cut
Dip Freq
Dip
4897 Hz
30.0 Hz
400 Hz
-2.00 dB
TOP LAYER
Top Level
Top Pitch
Top Decay
Top Drive
Top Cut
-10.0 dB
-5.00 st
70.0 ms
0.40
100 Hz
Point at a control: what it is and what it does is told here.



Low End: the sub.


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Kick
Sub
Bass
Acid
Pump
BASS PRESET
Bright Quarrel
this track: Bright Quarrel (Offbeat Saw)
OSCILLATOR
Level
-1.30 dB
Wave
0.11
Pulse Width
0.50
Sub Osc
0.00
Pan
0.00
Glide
0.00 ms
Drive
0.30
FILTER
Filter
Prophet (SSM...
Cutoff
749 Hz
Resonance
0.28
Env Amount
2.14 oct
Decay
91.4 ms
Accent
0.20
Key Track
0.50
Low Cut
80.0 Hz
High Cut
6000 Hz
AMP
Attack
1.25 ms
Decay
141 ms
Sustain
0.01
Release
25.5 ms
SENDS AND DUCK
Plate Send
0.00
Room Send
0.00
Duck
10.0 dB
Duck Release
110 ms
MOD ENVELOPE
Mod Attack
10.0 ms
Mod Decay
800 ms
Mod Sustain
0.00
Mod Release
400 ms
LFO 1
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 2
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 3
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 4
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
MATRIX 1-2
Mod 1 Source
Off
Mod 1 Target
Off
Mod 1 Amount
0.00
Mod 2 Source
Off
Mod 2 Target
Off
Mod 2 Amount
0.00
MATRIX 3-4
Mod 3 Source
Off
Mod 3 Target
Off
Mod 3 Amount
0.00
Mod 4 Source
Off
Mod 4 Target
Off
Mod 4 Amount
0.00
MATRIX 5-6
Mod 5 Source
Off
Mod 5 Target
Off
Mod 5 Amount
0.00
Mod 6 Source
Off
Mod 6 Target
Off
Mod 6 Amount
0.00
MATRIX 7-8
Mod 7 Source
Off
Mod 7 Target
Off
Mod 7 Amount
0.00
Mod 8 Source
Off
Mod 8 Target
Off
Mod 8 Amount
0.00



Low End: the bass.


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Kick
Sub
Bass
Acid
Pump
ACID PRESET
Acidic Bend
this track: Acidic Bend (Resonant Sweep)
OSCILLATOR
Level
-6.80 dB
Wave
0.24
Pulse Width
0.50
Sub Osc
0.00
Pan
0.10
Glide
60.0 ms
Drive
0.18
FILTER
Filter
Diode Ladder ...
Cutoff
496 Hz
Resonance
0.76
Env Amount
3.50 oct
Decay
500 ms
Accent
0.60
Key Track
0.30
Low Cut
120 Hz
High Cut
9000 Hz
AMP
Attack
1.54 ms
Decay
300 ms
Sustain
0.14
Release
62.6 ms
SENDS AND DUCK
Plate Send
0.10
Room Send
0.05
Duck
10.0 dB
Duck Release
110 ms
MOD ENVELOPE
Mod Attack
10.0 ms
Mod Decay
800 ms
Mod Sustain
0.00
Mod Release
400 ms
LFO 1
Rate
1.00 Hz
Shape
Triangle
Sync
4 Bars
Retrig
Fade
0.00 s
LFO 2
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 3
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 4
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
MATRIX 1-2
Mod 1 Source
LFO 1
Mod 1 Target
Cutoff
Mod 1 Amount
0.27
Mod 2 Source
Off
Mod 2 Target
Off
Mod 2 Amount
0.00
MATRIX 3-4
Mod 3 Source
Off
Mod 3 Target
Off
Mod 3 Amount
0.00
Mod 4 Source
Off
Mod 4 Target
Off
Mod 4 Amount
0.00
MATRIX 5-6
Mod 5 Source
Off
Mod 5 Target
Off
Mod 5 Amount
0.00
Mod 6 Source
Off
Mod 6 Target
Off
Mod 6 Amount
0.00
MATRIX 7-8
Mod 7 Source
Off
Mod 7 Target
Off
Mod 7 Amount
0.00
Mod 8 Source
Off
Mod 8 Target
Off
Mod 8 Amount
0.00



Low End: the 303.



Low End: the pump.

The low end is one system. The kick is tuned to the key (or its fifth, or its flat seventh); it has three engines (a swept sine, a resonator, a modelled 909) and a top layer, and its drive and clip run at four times the rate. The sub bass is a sine under the bass line, ducked by every kick and, with Kick Lock, locked to its phase, so that the two never cancel each other.

The mid bass and the 303 share one synthesiser with ten filter models (the Moog ladder, the 303's diode ladder, the Prophet's SSM2040, the Juno's IR3109, the SEM, the MS-20's Korg35 and more). The bass plays one of the trance figures -- the off-beat eighths, the rolling sixteenths, the gallop, the walking line, the drone --; the 303 plays its bar with accents and slides, and in Acid its cutoff, resonance, envelope and decay climb over phrases of 16, 32 or 64 bars and fall back at their end.

The pump is trance's sidechain: a ghost kick, silent and on a track of its own, ducks each voice by its own depth in dB, with the attack, hold and release here, and the returns of the rooms by Return Duck. It gives the pads and the leads their breathing without a compressor; in a breakdown the composer lets it go and ramps it back in for the drop.

KICK

Control	Key	Range	Default
Engine	`kick.engine`	Sweep, Resonator, 909	Sweep
Tune	`kick.tune`	Free, Key, Fifth, Flat Seventh	Key
Pitch End	`kick.pitch_end`	30 .. 120 Hz	52 Hz
Pitch Start	`kick.pitch_start`	60 .. 1500 Hz	220 Hz
Body Decay	`kick.pitch_decay`	5 .. 300 ms	24 ms
Punch Decay	`kick.punch_decay`	0.5 .. 20 ms	3 ms
Punch	`kick.punch`	0 .. 1	0.55
Attack	`kick.amp_attack`	0 .. 10 ms	0.2 ms
Hold	`kick.amp_hold`	0 .. 150 ms	20 ms
Decay	`kick.amp_decay`	20 .. 1500 ms	320 ms
Drive	`kick.drive`	0 .. 1	0.3
Clip	`kick.clip`	Soft, Hard	Soft
Click	`kick.click_level`	0 .. 1	0.4
Click Tone	`kick.click_tone`	500 .. 12000 Hz	3500 Hz
Click Decay	`kick.click_decay`	0.5 .. 30 ms	5 ms
Tone	`kick.tone`	200 .. 20000 Hz	8000 Hz
Level	`kick.level`	-36 .. 6 dB	-3 dB
Tail Limit	`kick.tail_limit`	-60 .. 0 dB	0 dB
Low Cut	`kick.low_cut`	15 .. 60 Hz	30 Hz
Dip Freq	`kick.dip_freq`	200 .. 1500 Hz	400 Hz
Dip	`kick.dip`	-12 .. 0 dB	-2 dB
Top Level	`kick.top_level`	-60 .. 0 dB	-10 dB
Top Pitch	`kick.top_pitch`	-24 .. 0 st	-5 st
Top Decay	`kick.top_decay`	20 .. 400 ms	70 ms
Top Drive	`kick.top_drive`	0 .. 1	0.4
Top Cut	`kick.top_cut`	80 .. 2000 Hz	100 Hz

SUB

Control	Key	Range	Default
Level	`sub.level`	-60 .. 6 dB	-4 dB
Octave	`sub.octave`	-2 .. 2	0
Attack	`sub.attack`	0.5 .. 50 ms	1 ms
Decay	`sub.decay`	20 .. 2000 ms	60 ms
Sustain	`sub.sustain`	0 .. 1	0
Release	`sub.release`	10 .. 800 ms	40 ms
Low Pass	`sub.low_pass`	40 .. 300 Hz	110 Hz
Drive	`sub.drive`	0 .. 1	0.1

Kick Lock	`sub.lock`	Off, Kick	Off
Duck	`sub.duck`	0 .. 24 dB	11 dB
Duck Hold	`sub.duck_hold`	0 .. 250 ms	20 ms
Duck Release	`sub.duck_release`	30 .. 600 ms	110 ms

BASS

Control	Key	Range	Default
Level	`bass.level`	-60 .. 6 dB	-1 dB
Pan	`bass.pan`	-1 .. 1	0
Wave	`bass.wave`	0 .. 1	0
Pulse Width	`bass.pulse_width`	0.05 .. 0.95	0.5
Sub Osc	`bass.sub_osc`	0 .. 1	0
Filter	`bass.filter`	Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder (303), Korg35 (MS-20), Polivoks, Wasp, Comb	Moog Ladder
Cutoff	`bass.cutoff`	40 .. 12000 Hz	420 Hz
Resonance	`bass.resonance`	0 .. 1	0.15
Env Amount	`bass.env_amount`	0 .. 6 oct	2.2 oct
Decay	`bass.decay`	5 .. 3000 ms	90 ms
Accent	`bass.accent`	0 .. 1	0.2
Attack	`bass.amp_attack`	0.5 .. 500 ms	0.5 ms
Amp Decay	`bass.amp_decay`	5 .. 3000 ms	150 ms
Sustain	`bass.amp_sustain`	0 .. 1	0
Release	`bass.amp_release`	5 .. 3000 ms	40 ms
Glide	`bass.glide`	0 .. 500 ms	0 ms
Drive	`bass.drive`	0 .. 1	0.25
Key Track	`bass.key_track`	0 .. 1	0.5
Low Cut	`bass.low_cut`	20 .. 500 Hz	80 Hz
High Cut	`bass.high_cut`	500 .. 20000 Hz	6000 Hz
Plate Send	`bass.plate_send`	0 .. 1	0
Room Send	`bass.room_send`	0 .. 1	0
Duck	`bass.duck`	0 .. 24 dB	8 dB
Duck Release	`bass.duck_release`	30 .. 600 ms	110 ms
Mod Attack	`bass.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`bass.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`bass.menv_sustain`	0 .. 1	0
Mod Release	`bass.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`bass.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`bass.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`bass.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`bass.lfo1_retrig`	off / on	off

LFO 1 Fade	`bass.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`bass.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`bass.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`bass.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`bass.lfo2_retrig`	off / on	off
LFO 2 Fade	`bass.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`bass.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`bass.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`bass.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`bass.lfo3_retrig`	off / on	off
LFO 3 Fade	`bass.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`bass.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`bass.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`bass.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`bass.lfo4_retrig`	off / on	off
LFO 4 Fade	`bass.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`bass.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`bass.mx1_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 1 Amount	`bass.mx1_amount`	-1 .. 1	0
Mod 2 Source	`bass.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`bass.mx2_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 2 Amount	`bass.mx2_amount`	-1 .. 1	0
Mod 3 Source	`bass.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`bass.mx3_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 3 Amount	`bass.mx3_amount`	-1 .. 1	0
Mod 4 Source	`bass.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`bass.mx4_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 4 Amount	`bass.mx4_amount`	-1 .. 1	0
Mod 5 Source	`bass.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 5 Target	`bass.mx5_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 5 Amount	`bass.mx5_amount`	-1 .. 1	0
Mod 6 Source	`bass.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`bass.mx6_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 6 Amount	`bass.mx6_amount`	-1 .. 1	0
Mod 7 Source	`bass.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`bass.mx7_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 7 Amount	`bass.mx7_amount`	-1 .. 1	0
Mod 8 Source	`bass.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`bass.mx8_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 8 Amount	`bass.mx8_amount`	-1 .. 1	0

ACID

Control	Key	Range	Default
Level	`acid.level`	-60 .. 6 dB	-12 dB
Pan	`acid.pan`	-1 .. 1	0.1
Wave	`acid.wave`	0 .. 1	0
Pulse Width	`acid.pulse_width`	0.05 .. 0.95	0.5
Sub Osc	`acid.sub_osc`	0 .. 1	0
Filter	`acid.filter`	Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder (303), Korg35 (MS-20), Polivoks, Wasp, Comb	Diode Ladder (303)
Cutoff	`acid.cutoff`	40 .. 12000 Hz	600 Hz
Resonance	`acid.resonance`	0 .. 1	0.72
Env Amount	`acid.env_amount`	0 .. 6 oct	2.5 oct
Decay	`acid.decay`	5 .. 3000 ms	220 ms
Accent	`acid.accent`	0 .. 1	0.6
Attack	`acid.amp_attack`	0.5 .. 500 ms	0.5 ms
Amp Decay	`acid.amp_decay`	5 .. 3000 ms	900 ms
Sustain	`acid.amp_sustain`	0 .. 1	0.8
Release	`acid.amp_release`	5 .. 3000 ms	60 ms
Glide	`acid.glide`	0 .. 500 ms	60 ms
Drive	`acid.drive`	0 .. 1	0.6

Key Track	`acid.key_track`	0 .. 1	0.3
Low Cut	`acid.low_cut`	20 .. 500 Hz	120 Hz
High Cut	`acid.high_cut`	500 .. 20000 Hz	9000 Hz
Plate Send	`acid.plate_send`	0 .. 1	0.1
Room Send	`acid.room_send`	0 .. 1	0.05
Duck	`acid.duck`	0 .. 24 dB	6 dB
Duck Release	`acid.duck_release`	30 .. 600 ms	110 ms
Mod Attack	`acid.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`acid.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`acid.menv_sustain`	0 .. 1	0
Mod Release	`acid.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`acid.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`acid.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`acid.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`acid.lfo1_retrig`	off / on	off
LFO 1 Fade	`acid.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`acid.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`acid.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`acid.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`acid.lfo2_retrig`	off / on	off
LFO 2 Fade	`acid.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`acid.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`acid.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`acid.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`acid.lfo3_retrig`	off / on	off
LFO 3 Fade	`acid.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`acid.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`acid.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`acid.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`acid.lfo4_retrig`	off / on	off
LFO 4 Fade	`acid.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`acid.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`acid.mx1_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 1 Amount	`acid.mx1_amount`	-1 .. 1	0
Mod 2 Source	`acid.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 2 Target	`acid.mx2_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 2 Amount	`acid.mx2_amount`	-1 .. 1	0
Mod 3 Source	`acid.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`acid.mx3_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 3 Amount	`acid.mx3_amount`	-1 .. 1	0
Mod 4 Source	`acid.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`acid.mx4_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 4 Amount	`acid.mx4_amount`	-1 .. 1	0
Mod 5 Source	`acid.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`acid.mx5_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 5 Amount	`acid.mx5_amount`	-1 .. 1	0
Mod 6 Source	`acid.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`acid.mx6_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 6 Amount	`acid.mx6_amount`	-1 .. 1	0
Mod 7 Source	`acid.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`acid.mx7_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 7 Amount	`acid.mx7_amount`	-1 .. 1	0
Mod 8 Source	`acid.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`acid.mx8_dst`	Off, Pitch, Pulse Width, Cutoff, Resonance, Env Amount, Drive, Level, Pan	Off
Mod 8 Amount	`acid.mx8_amount`	-1 .. 1	0

PUMP

Control	Key	Range	Default
Attack	`pump.attack`	0.1 .. 20 ms	0.5 ms
Hold	`pump.hold`	0 .. 150 ms	20 ms

Release	`pump.release`	30 .. 600 ms	120 ms
Return Duck	`pump.return_duck`	0 .. 12 dB	4 dB

Drums



Twelve lanes, each a small drum synthesiser: a role (the closed, rolling and open hats, the ride, the clap and its ghost, the snare, the rim, the shaker, toms, congas, noise, the crash, the tambourine), an engine (noise, metal -- the 909's six square waves --, modal, tone, FM), a filter and a shape. They run side by side in the lanes of the processor's vector registers. The snare plays the roll into the drop, from quarters to thirty-seconds; the crash marks the drops.

The mix module holds the buses: the hats and the percussion with their level and low pass, the drum bus's saturation, the group low cut the builds draw up, and the synth bus's level -- the fader the energy curve moves.

PERC (12 INSTANCES)

Control	Key	Range	Default
Active	`percN.active`	off / on	on

Role	`percN.role`	Closed Hat, Rolling Hat, Open Hat, Ride, Clap, Clap Ghost, Snare, Rim, Shaker, Tom, Conga, Noise, Crash, Tambourine	Closed Hat
Engine	`percN.engine`	Noise, Metal, Modal, Tone, FM	Noise
Pitch	`percN.pitch`	40 .. 12000 Hz	400 Hz
Pitch Amount	`percN.pitch_amount`	1 .. 16 x	1 x
Pitch Decay	`percN.pitch_decay`	0.5 .. 300 ms	10 ms
FM Ratio	`percN.fm_ratio`	0.25 .. 8	1.41
FM Index	`percN.fm_index`	0 .. 8	0
Modes	`percN.mode_set`	Membrane, Bar, Harmonic	Membrane
Mode Damping	`percN.mode_damp`	0 .. 1	0.5
Metal Scale	`percN.metal_scale`	0.25 .. 4 x	1 x
Noise	`percN.noise`	0 .. 1	1
Noise Decay	`percN.noise_decay`	2 .. 3000 ms	55 ms
Bursts	`percN.bursts`	1 .. 6	1
Burst Spacing	`percN.burst_spacing`	2 .. 40 ms	10 ms
Decay	`percN.decay`	2 .. 3000 ms	55 ms
Filter	`percN.filter`	Low Pass, Band Pass, High Pass	High Pass
Cutoff	`percN.cutoff`	100 .. 18000 Hz	7500 Hz
Resonance	`percN.resonance`	0 .. 1	0.15
Low Cut	`percN.low_cut`	150 .. 8000 Hz	3000 Hz
Drive	`percN.drive`	0 .. 1	0.1
Level	`percN.level`	-36 .. 6 dB	-2.5 dB
Pan	`percN.pan`	-1 .. 1	0.1
Choke Group	`percN.choke`	0 .. 4	1
Shift	`percN.shift`	-10 .. 10 ms	0 ms
Density	`percN.density`	0 .. 1	0.5
Tune to Key	`percN.tune`	off / on	off
Pan Depth	`percN.pan_depth`	0 .. 1	0
Pan Period	`percN.pan_bars`	0.0625 .. 16 bars	0.1875 bars
Cut Tracks Pitch	`percN.cut_track`	0 .. 2	0
Noise Type	`percN.noise_type`	White, 909 Metal	909 Metal

MIX

Control	Key	Range	Default
Hats Level	`mix.hats_level`	-24 .. 12 dB	-1 dB
Hats Cut	`mix.hats_cut`	200 .. 20000 Hz	20000 Hz
Perc Level	`mix.perc_level`	-24 .. 12 dB	-4 dB

Perc Cut	`mix.perc_cut`	200 .. 20000 Hz	20000 Hz
Drum Saturation	`mix.drum_sat`	0 .. 1	0.2
Group Low Cut	`mix.low_cut`	20 .. 500 Hz	20 Hz
Synth Level	`mix.synth_level`	-24 .. 6 dB	0 dB

Synths


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Lead
Counter
Pluck
Arp
Pad
Stab
LEAD PRESET
Radiant Searchlight
this track: Radiant Searchlight (Trance Gate Lead)
OSCILLATOR
Oscillator
Supersaw
Detune
0.68
Mix
0.86
Dynamic Detune
0.50
Wave
0.00
Pulse Width
0.50
Drift
1.00 ct
SECOND OSCILLATOR
Oscillator 2
Supersaw
Osc 2 Mix
0.35
Osc 2 Interval
-1 Oct
Osc 2 Detune
0.00 ct
FM AND WAVETABLE
FM Ratio
2.00
FM Index
2.50
FM Decay
250 ms
Table
Vocal
Position
0.30
Position Env
0.00
Position Decay
1500 ms
Position LFO
0.15
LFO Period
16.0 beats
FILTER
Model
Juno [IR3109]
Type
Low Pass
Mode
0.00
Cutoff
9414 Hz
Resonance
0.29
Env Amount
0.71 oct
Key Track
0.50
HP Floor
250 Hz
HP Track
1.00 x f0
FILTER ENVELOPE
Filter Attack
0.10 ms
Filter Decay
418 ms
Filter Sustain
0.00
Filter Release
300 ms
AMP
Attack
4.08 ms
Decay
393 ms
Sustain
0.96
Release
271 ms
Velocity
0.40
Glide
0.00 ms
VOICE LFO
Voice LFO
8.00 beats
LFO to Cutoff
0.00 oct
LFO to Pitch
0.00 ct
LFO to Level
0.00
Slow Movement
0.00
TRANCE GATE
Trance Gate
Gate Pattern
Trance 1
Gate Depth
0.85
Gate Duty
0.50
Gate Attack
3.00 ms
Gate Release
12.0 ms
Gate Tone
0.40
DELAY
Send
0.22
Left
1/4
Right
3/8
Feedback
0.35
High Pass
350 Hz
Low Pass
6000 Hz
OUT
Level
-9.70 dB
Pan
-0.05
Width
0.80
Disperse
0 x
Disperse Freq
1250 Hz
Room Send
0.00
Plate Send
0.10
Hall Send
0.35
Duck
1.50 dB
MOD ENVELOPE
Mod Attack
10.0 ms
Mod Decay
800 ms
Mod Sustain
0.00
Mod Release
400 ms
LFO 1
Rate
1.00 Hz
Shape
Square
Sync
1/16
Retrig
Fade
0.00 s
LFO 2
Rate
1.00 Hz
Shape
Sine
Sync
4 Bars
Retrig
Fade
0.00 s
LFO 3
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 4
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
MATRIX 1-2
Mod 1 Source
LFO 1
Mod 1 Target
Level
Mod 1 Amount
-0.59
Mod 2 Source
LFO 2
Mod 2 Target
Cutoff
Mod 2 Amount
0.11
MATRIX 3-4
Mod 3 Source
Off
Mod 3 Target
Off
Mod 3 Amount
0.00
Mod 4 Source
Off
Mod 4 Target
Off
Mod 4 Amount
0.00
MATRIX 5-6
Mod 5 Source
Off
Mod 5 Target
Off
Mod 5 Amount
0.00
Mod 6 Source
Off
Mod 6 Target
Off
Mod 6 Amount
0.00
MATRIX 7-8
Mod 7 Source
Off
Mod 7 Target
Off
Mod 7 Amount
0.00
Mod 8 Source
Off
Mod 8 Target
Off
Mod 8 Amount
0.00
Point at a control: what it is and what it does is told here.

Six voices of one synthesiser, each with its own role and bank: the lead, the counter-melody, the pluck, the arp, the pad and the stab. Two oscillators -- the supersaw after Adam Szabo's measurements of the Roland JP-8000 (seven saws, the detune curve and the mix of the original), virtual analogue, FM or a wavetable --, a filter from the same ten models, an amplitude and a filter envelope, the trance gate (the classic patterns and their sixteenth-note masks), a tempo delay, sends into the room, the plate and the hall, and the modulation block. The page shows one voice at a time; the voice buttons switch between them.

The lead plays the motif; the counter answers in the lead's held notes an octave above; the pluck plays the chords in syncopated sixteenths; the arp breaks them up; the pad holds them, gated in the drops and opening over the breakdown; the stab hits them in the drops (every other block of the first drop, the main drop from its second block on). Which voices play in which block is the layer matrix's.

LEAD

Control	Key	Range	Default
Oscillator	`lead.osc`	Supersaw, VA, FM, Wavetable	Supersaw
Detune	`lead.detune`	0 .. 1	0.62
Mix	`lead.mix`	0 .. 1	0.8
Dynamic Detune	`lead.dynamic_detune`	0 .. 1	0.5
Wave	`lead.wave`	0 .. 1	0
Pulse Width	`lead.pulse_width`	0.05 .. 0.95	0.5
FM Ratio	`lead.fm_ratio`	0.5 .. 8	2
FM Index	`lead.fm_index`	0 .. 10	2.5
FM Decay	`lead.fm_decay`	5 .. 2000 ms	250 ms
Table	`lead.table`	Classic, Vocal, Glass, PWM, Sync, Formant Saw, WaveEdit Hienharm, WaveEdit Junox_ho, WaveEdit Euclidea, WaveEdit Sohler49, WaveEdit Vocal_fo, WaveEdit Pwn_saw, WaveEdit Tidyb030, WaveEdit I_heart, WaveEdit Sine_n, WaveEdit Vocal_00, WaveEdit Supersaw, WaveEdit Tidyb060, Consonant 024, WaveEdit Synlp92, WaveEdit Distorte, WaveEdit Fourier2, WaveEdit Grav_b8, WaveEdit Spectr01, WaveEdit Discorda, WaveEdit Sohler47, WaveEdit Ppg_wa27, WaveEdit Micro_q, WaveEdit Noise_wa, WaveEdit Kuato, WaveEdit Synlp67, WaveEdit Komple01, Consonant 066, WaveEdit Iterat00, WaveEdit Retro_sp, WaveEdit Acid_rin, WaveEdit Meravigl, WaveEdit Tidyb066, WaveEdit Tidyb049, WaveEdit Fracta03, WaveEdit Chebyshe, Sampled 167, WaveEdit Wavetabl, Chord 004, WaveEdit Grav_b6, WaveEdit Sohler33, WaveEdit Ppg_wa13, WaveEdit Pd104, WaveEdit Sohler48, WaveEdit Ppg_wa28, WaveEdit Wavetrip, WaveEdit Cz_ish, WaveEdit Fx_bitno, WaveEdit Tidyb046, WaveEdit Sohler74, WaveEdit Sohler29, WaveEdit Enshtu02, WaveEdit Tidyb072, WaveEdit Tidyb050, WaveEdit Voice_a, Resonator 018, WaveEdit Tidyb035, WaveEdit Tezzalog, AKWF 0004-hollow-01, WaveEdit Lom_a, WaveEdit Tidyb064, WaveEdit Moddrop, WaveEdit Harmomet, Hollow 013, WaveEdit Tidyb065, WaveEdit Ultra_ch, WaveEdit Laser_cr, WaveEdit Ppg_wa05, WaveEdit Drone, WaveEdit Gentle_m, WaveEdit Tidyb067, WaveEdit Tidyb005, Resonator 008, WaveEdit Synlp71, WaveEdit Sohler46, WaveEdit Tidyb077, WaveEdit Tidyb027, WaveEdit Sand_eye, WaveEdit Feedback, WaveEdit Tidyb071, WaveEdit Snake_ey, WaveEdit Hyperbol, AKWF 0018-hollow-01, Overtone 064, WaveEdit Light_00, WaveEdit Crush_ad, Organ 034, Sampled 131, Glass 012, WaveEdit	Vocal

Sohler67, Organ 006, WaveEdit Ppg_wa14, WaveEdit Sq8_sh, AKWF clavinet-hollow-01, Glass 009, WaveEdit Grav_c7, Consonant 100, WaveEdit Sohler51, Vowel Bass 015, Sampled 227, Hollow 005, Sampled 065, AKWF oscchip-04, AKWF raw-01, Hollow 015, AKWF snippets-01, Chord 027, Consonant 071, Chord 020, Consonant 051, WaveEdit Cyborg, Sampled 238, AKWF 0014-hollow-01, Overtone 000, WaveEdit Ppg_wa15, WaveEdit Grav_b4, Consonant 009, WaveEdit Grav_c5, WaveEdit Twist6, Glass 027, Sampled 078, AKWF oscchip-05, Consonant 120, WaveEdit Ppg_wa04, WaveEdit Sohler59, Sampled 081, Otmorph 053, Chord 030, Chord 032, Organ 029, Overtone 108, Hollow 001, WaveEdit Ppg_wa10, WaveEdit Organ_di, AKWF 0009-hollow-01, Tube 042, Vowel Bass 008, Organ 035, Metal 001, Consonant 114, AKWF vgame-03, Sampled 224, Resonator 001, Vowel Bass 038, Sampled 058, Vowel Tenor 038, Glass 026, Chord 019, Otmorph 115, AKWF stereo-04, Consonant 105, Vowel Bass 026, Chord 017, WaveEdit Ppg_wa11, Consonant 109, Sampled 125, Consonant 012, Overtone 046, Glass 016, Otmorph 067, Organ 026, Otmorph 005, Glass 018, Consonant 018, Hollow 023, Overtone 019, Otmorph 070, Consonant 127, Vowel Bass 029, Organ 016, Vowel Bass 017, Sampled 209, Sampled 130, Overtone 038, WaveEdit Reso_ana, Consonant 142, WaveEdit Reso_p00, Chord 009, AKWF distorted-01, Sampled 162, Glass 006, Metal 003, WaveEdit Square_p, Sampled 059, Organ 030, Sampled 003, Consonant 036, Chord 034, Sampled 193, WaveEdit Qux_fmy, Vowel Bass 023, Otmorph 133, WaveEdit Sohler52, Vowel Bass 007, WaveEdit Grav_b3, Consonant 025, Consonant 146, Chord 018, Overtone 047, Chord 038, Sampled 127, Metal 009, Organ 014, Consonant 033, Vowel Bass 035, Consonant 001, WaveEdit Iterativ, Consonant 129, Tube 066, Organ 025, Vowel Tenor 012, Chord 039, Sampled 106, Sampled 207, Breath 013, WaveEdit Grav_c2, Consonant 079, Otmorph 119, Consonant 064, WaveEdit Ppg_wa18, WaveEdit Pd103, Overtone 033, Chord 013, Vowel Bass 014, Sampled 226, Chord 011, Sampled 048, Vowel Tenor 037, Otmorph 095, Organ 012, Vowel Tenor 019, Overtone 015, Overtone 054, Consonant 088, Consonant 108, Sampled 197, Organ 037, Choir 004, Vowel Bass 030, Resonator 019, Otmorph 086, Tube 074, Tube 089, Sampled 182, Organ 038, Sampled 173, Consonant 060, Otmorph 030, Sampled 138, Consonant 056, Otmorph 132, Otmorph 138, Glass 003, Vowel Bass 021, Vowel Tenor 036, Organ 033, Sampled 214, Consonant 081, Consonant 094, Consonant 028, Consonant 003, Vowel Soprano 035, Consonant 126, Vowel Bass 027, Chord 000, Resonator 010, Choir 026, Metal 015, AKWF 0018-02, Consonant 046, Otmorph 079, Vowel Tenor 024, Consonant 117, Choir 025, Overtone 067, Chord 016, Otmorph 109, Vowel Alto 001, Otmorph 089, Consonant 077, Shimmer 033, Otmorph 022, Consonant 144, Organ 000, Consonant 139, Consonant 106, Vowel Bass 039, Otmorph 043, Vowel Tenor 033, Resonator 012, Otmorph 059, Otmorph 073, Sampled 093, Overtone 055, Sampled 189, Otmorph 068, Otmorph 064, Breath 029, Chord 033, Sampled 108, Consonant 030, Bowed 075, Organ 011, Vowel Tenor 006, Otmorph 056, AKWF 0006-02, Glass 037, Vowel Bass 001, WaveEdit Tidyb026, WaveEdit Sohler39, Sampled 076, Organ 021, WaveEdit Harmonio, WaveEdit Grav_c9, Consonant 037, WaveEdit Sine_a02, WaveEdit High_fre, WaveEdit Tidyb024, AKWF hvoice-01, WaveEdit Sohler58, WaveEdit Ppg_wa29, Vowel Bass 036, WaveEdit Sohler19, WaveEdit Sohler53, WaveEdit Sohler94, Glass 023, Chord 031, WaveEdit Access_v, Bowed 079, AKWF c604-01, WaveEdit Sohler56, WaveEdit Tidyb017, WaveEdit Sohler11, Overtone 018, Consonant 032, Reed 034, WaveEdit Mk_dwg_h, WaveEdit Grav_c3, WaveEdit Fracta01, WaveEdit Synlp54, WaveEdit Tidyb062, WaveEdit Envelo01, Vowel Tenor 005, WaveEdit Tidyb004, Chord 008, AKWF bitreduced-01, AKWF bw-saw-01, Overtone 053, WaveEdit Grav_a6, WaveEdit Sohler26, Sampled 066, WaveEdit Sohler86, Tube 036, Otmorph 014, WaveEdit Sohler76, WaveEdit Sohler27, Choir 030, WaveEdit

		Bank_410, WaveEdit Tidyb018, WaveEdit Alpha_2, WaveEdit Tidyb003, WaveEdit Sohler35, WaveEdit Lfo_play, WaveEdit Ppg_wa01, WaveEdit Ppg_wa02, WaveEdit Prophe00, Vowel Tenor 011, Tube 072, WaveEdit Tidyb058, Consonant 137, WaveEdit Sohler31, Consonant 076, WaveEdit Just_ran, Consonant 080, WaveEdit Grav_a5, WaveEdit Sohler14, Resonator 020, WaveEdit Grav_a1, Glass 020, WaveEdit Sohler97, Chord 028, WaveEdit Grav_a2, Vowel Bass 034, WaveEdit Sohler70, Breath 031, AKWF oscchip-03, WaveEdit Sohler84, Consonant 149, WaveEdit Tidyb041, Consonant 023, Otmorph 126, Bowed 054, WaveEdit Mixed_as, Otmorph 084, WaveEdit Twist31, WaveEdit Spectr05, WaveEdit Sohler92, WaveEdit Isobelle, Chord 021, Consonant 067, WaveEdit Envelope, Sub 003, WaveEdit Sohler79, Tube 002, Consonant 008, WaveEdit Ppg_wa03, Pluck 028, Vowel Alto 012, AKWF epiano-01, AKWF bw-squ-02, Organ 005, WaveEdit Sine2saw, Vowel Alto 039, Glass 004, WaveEdit Sohler43, Sampled 109, Vowel Alto 003, Glass 010, AKWF clarinett-01, WaveEdit Sohler18, Sampled 170, Tube 046, Vowel Tenor 017, WaveEdit Foldfeed, Tube 008, AKWF 0015-01, Otmorph 106, Overtone 037, Consonant 022, Breath 019, WaveEdit Ppg_wa07, Sampled 164, WaveEdit Sine_mut, Vowel Alto 007, Sampled 211, Metal 025, Glass 007, Vowel Soprano 011, Glass 024, AKWF 0008-01, Vowel Soprano 033, Shimmer 002, Pure 015, WaveEdit Geometri, Sampled 203, Chord 007, Vowel Soprano 005, AKWF altosax-01, Vowel Soprano 015, WaveEdit Ppg_wa17, Overtone 010, WaveEdit Synlp159, Sampled 115, WaveEdit Ppg_wa22, Otmorph 112, Vowel Alto 016, Breath 033, Tube 009, Tube 079, Sampled 097, Chord 023, Stack 008, AKWF 0003-01, Glass 038, Metal 016	
Position	`lead.position`	0 .. 1	0.3
Position Env	`lead.pos_env`	-1 .. 1	0
Position Decay	`lead.pos_decay`	10 .. 8000 ms	1500 ms
Position LFO	`lead.pos_lfo_depth`	0 .. 0.5	0.15
LFO Period	`lead.pos_lfo_beats`	0.25 .. 64 beats	16 beats
Cutoff	`lead.cutoff`	200 .. 18000 Hz	9000 Hz
Resonance	`lead.resonance`	0 .. 1	0.1
Env Amount	`lead.env_amount`	0 .. 6 oct	1 oct
Filter Decay	`lead.filter_decay`	5 .. 3000 ms	600 ms
Key Track	`lead.key_track`	0 .. 1	0.5
HP Floor	`lead.hp_floor`	40 .. 400 Hz	250 Hz
HP Track	`lead.hp_track`	0 .. 1 x f0	1 x f0
Attack	`lead.amp_attack`	0.3 .. 2000 ms	3 ms
Decay	`lead.amp_decay`	5 .. 4000 ms	800 ms
Sustain	`lead.amp_sustain`	0 .. 1	0.85
Release	`lead.amp_release`	5 .. 4000 ms	220 ms
Width	`lead.width`	0 .. 1	0.8
Velocity	`lead.vel_sens`	0 .. 1	0.4

Delay Send	`lead.delay_send`	0 .. 1	0.22
Delay Left	`lead.delay_left`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	1/4
Delay Right	`lead.delay_right`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/8
Delay Feedback	`lead.delay_feedback`	0 .. 0.9	0.35
Delay High Pass	`lead.delay_high_pass`	150 .. 2000 Hz	350 Hz
Delay Low Pass	`lead.delay_low_pass`	800 .. 16000 Hz	6000 Hz
Room Send	`lead.room_send`	0 .. 1	0
Hall Send	`lead.hall_send`	0 .. 1	0.35
Duck	`lead.duck`	0 .. 18 dB	1.5 dB
Trance Gate	`lead.gate`	off / on	off
Gate Pattern	`lead.gate_pattern`	Sixteenths, Eighths, Rolling, Gallop, 3-3-2, Triplets, Trance 1, Trance 2, Trance 3	Trance 1
Gate Depth	`lead.gate_depth`	0 .. 1	0.85
Gate Duty	`lead.gate_duty`	0.05 .. 1	0.5
Gate Attack	`lead.gate_attack`	0.5 .. 60 ms	3 ms
Gate Release	`lead.gate_release`	0.5 .. 120 ms	12 ms
Gate Tone	`lead.gate_tone`	0 .. 1	0.4
Level	`lead.level`	-36 .. 6 dB	-9 dB
Disperse	`lead.disperse`	0 .. 8 x	0 x
Disperse Freq	`lead.disperse_freq`	200 .. 8000 Hz	1250 Hz
Drift	`lead.drift`	0 .. 8 ct	1 ct
Filter Type	`lead.filter_type`	Low Pass, Band Pass, High Pass, Notch	Low Pass
Glide	`lead.glide`	0 .. 400 ms	0 ms
Pan	`lead.pan`	-1 .. 1	-0.05
Oscillator 2	`lead.osc2`	Off, Supersaw, VA, FM, Wavetable	Supersaw
Osc 2 Mix	`lead.osc2_mix`	0 .. 1	0.35
Osc 2 Interval	`lead.osc2_interval`	-2 Oct, -1 Oct, -5th, Unison, +5th, +1 Oct	-1 Oct
Osc 2 Detune	`lead.osc2_detune`	-50 .. 50 ct	0 ct
Voice LFO	`lead.lfo_beats`	0.25 .. 64 beats	8 beats

LFO to Cutoff	`lead.lfo_cutoff`	0 .. 4 oct	0 oct
LFO to Pitch	`lead.lfo_pitch`	0 .. 50 ct	0 ct
LFO to Level	`lead.lfo_amp`	0 .. 1	0
Plate Send	`lead.plate_send`	0 .. 1	0.1
Slow Movement	`lead.slow_mod`	0 .. 1	0
Filter Model	`lead.filter_model`	State Variable, Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder, Korg35 (MS-20), Polivoks, Wasp	State Variable
Filter Mode	`lead.filter_mode`	0 .. 1	0
Filter Attack	`lead.filt_attack`	0.1 .. 4000 ms	0.1 ms
Filter Sustain	`lead.filt_sustain`	0 .. 1	0
Filter Release	`lead.filt_release`	5 .. 8000 ms	300 ms
Mod Attack	`lead.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`lead.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`lead.menv_sustain`	0 .. 1	0
Mod Release	`lead.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`lead.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`lead.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`lead.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`lead.lfo1_retrig`	off / on	off
LFO 1 Fade	`lead.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`lead.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`lead.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`lead.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`lead.lfo2_retrig`	off / on	off
LFO 2 Fade	`lead.lfo2_fade`	0 .. 8 s	0 s

LFO 3 Rate	`lead.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`lead.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`lead.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`lead.lfo3_retrig`	off / on	off
LFO 3 Fade	`lead.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`lead.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`lead.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`lead.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`lead.lfo4_retrig`	off / on	off
LFO 4 Fade	`lead.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`lead.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`lead.mx1_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 1 Amount	`lead.mx1_amount`	-1 .. 1	0
Mod 2 Source	`lead.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`lead.mx2_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 2 Amount	`lead.mx2_amount`	-1 .. 1	0
Mod 3 Source	`lead.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`lead.mx3_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 3 Amount	`lead.mx3_amount`	-1 .. 1	0
Mod 4 Source	`lead.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`lead.mx4_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 4 Amount	`lead.mx4_amount`	-1 .. 1	0
Mod 5 Source	`lead.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 5 Target	`lead.mx5_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 5 Amount	`lead.mx5_amount`	-1 .. 1	0
Mod 6 Source	`lead.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`lead.mx6_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 6 Amount	`lead.mx6_amount`	-1 .. 1	0
Mod 7 Source	`lead.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`lead.mx7_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 7 Amount	`lead.mx7_amount`	-1 .. 1	0
Mod 8 Source	`lead.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`lead.mx8_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 8 Amount	`lead.mx8_amount`	-1 .. 1	0

COUNTER

Control	Key	Range	Default
Oscillator	`counter.osc`	Supersaw, VA, FM, Wavetable	Supersaw
Detune	`counter.detune`	0 .. 1	0.45
Mix	`counter.mix`	0 .. 1	0.7
Dynamic Detune	`counter.dynamic_detune`	0 .. 1	0.6
Wave	`counter.wave`	0 .. 1	0
Pulse Width	`counter.pulse_width`	0.05 .. 0.95	0.5
FM Ratio	`counter.fm_ratio`	0.5 .. 8	2
FM Index	`counter.fm_index`	0 .. 10	2.5
FM Decay	`counter.fm_decay`	5 .. 2000 ms	250 ms
Table	`counter.table`	Classic, Vocal, Glass, PWM, Sync, Formant Saw, WaveEdit Hienharm, WaveEdit Junox_ho, WaveEdit Euclidea, WaveEdit Sohler49, WaveEdit Vocal_fo, WaveEdit Pwn_saw, WaveEdit Tidyb030, WaveEdit I_heart, WaveEdit Sine_n, WaveEdit Vocal_00, WaveEdit Supersaw, WaveEdit Tidyb060, Consonant 024, WaveEdit Synlp92, WaveEdit Distorte, WaveEdit Fourier2, WaveEdit Grav_b8, WaveEdit Spectr01, WaveEdit Discorda, WaveEdit Sohler47, WaveEdit Ppg_wa27, WaveEdit Micro_q, WaveEdit Noise_wa, WaveEdit Kuato, WaveEdit Synlp67, WaveEdit Komple01, Consonant 066, WaveEdit Iterat00, WaveEdit Retro_sp, WaveEdit Acid_rin, WaveEdit Meravigl, WaveEdit Tidyb066, WaveEdit Tidyb049, WaveEdit	Vocal

Fracta03, WaveEdit Chebyshe, Sampled 167, WaveEdit Wavetabl, Chord 004, WaveEdit Grav_b6, WaveEdit Sohler33, WaveEdit Ppg_wa13, WaveEdit Pd104, WaveEdit Sohler48, WaveEdit Ppg_wa28, WaveEdit Wavetrip, WaveEdit Cz_ish, WaveEdit Fx_bitno, WaveEdit Tidyb046, WaveEdit Sohler74, WaveEdit Sohler29, WaveEdit Enshtu02, WaveEdit Tidyb072, WaveEdit Tidyb050, WaveEdit Voice_a, Resonator 018, WaveEdit Tidyb035, WaveEdit Tezzalog, AKWF 0004-hollow-01, WaveEdit Lom_a, WaveEdit Tidyb064, WaveEdit Moddrop, WaveEdit Harmomet, Hollow 013, WaveEdit Tidyb065, WaveEdit Ultra_ch, WaveEdit Laser_cr, WaveEdit Ppg_wa05, WaveEdit Drone, WaveEdit Gentle_m, WaveEdit Tidyb067, WaveEdit Tidyb005, Resonator 008, WaveEdit Synlp71, WaveEdit Sohler46, WaveEdit Tidyb077, WaveEdit Tidyb027, WaveEdit Sand_eye, WaveEdit Feedback, WaveEdit Tidyb071, WaveEdit Snake_ey, WaveEdit Hyperbol, AKWF 0018-hollow-01, Overtone 064, WaveEdit Light_00, WaveEdit Crush_ad, Organ 034, Sampled 131, Glass 012, WaveEdit Sohler67, Organ 006, WaveEdit Ppg_wa14, WaveEdit Sq8_sh, AKWF clavinet-hollow-01, Glass 009, WaveEdit Grav_c7, Consonant 100, WaveEdit Sohler51, Vowel Bass 015, Sampled 227, Hollow 005, Sampled 065, AKWF oscchip-04, AKWF raw-01, Hollow 015, AKWF snippets-01, Chord 027, Consonant 071, Chord 020, Consonant 051, WaveEdit Cyborg, Sampled 238, AKWF 0014-hollow-01, Overtone 000, WaveEdit Ppg_wa15, WaveEdit Grav_b4, Consonant 009, WaveEdit Grav_c5, WaveEdit Twist6, Glass 027, Sampled 078, AKWF oscchip-05, Consonant 120, WaveEdit Ppg_wa04, WaveEdit Sohler59, Sampled 081, Otmorph 053, Chord 030, Chord 032, Organ 029, Overtone 108, Hollow 001, WaveEdit Ppg_wa10, WaveEdit Organ_di, AKWF 0009-hollow-01, Tube 042, Vowel Bass 008, Organ 035, Metal 001, Consonant 114, AKWF vgame-03, Sampled 224, Resonator 001, Vowel Bass 038, Sampled 058, Vowel Tenor 038, Glass 026, Chord 019, Otmorph 115, AKWF stereo-04, Consonant 105, Vowel Bass 026, Chord 017, WaveEdit Ppg_wa11, Consonant 109, Sampled 125, Consonant 012, Overtone 046, Glass 016, Otmorph 067, Organ 026, Otmorph 005, Glass 018, Consonant 018, Hollow 023, Overtone 019, Otmorph 070, Consonant 127, Vowel Bass 029, Organ 016, Vowel Bass 017, Sampled 209, Sampled 130, Overtone 038, WaveEdit Reso_ana, Consonant 142, WaveEdit Reso_p00, Chord 009, AKWF distorted-01, Sampled 162, Glass 006, Metal 003, WaveEdit Square_p, Sampled 059, Organ 030, Sampled 003, Consonant 036, Chord 034, Sampled 193, WaveEdit Qux_fmy, Vowel Bass 023, Otmorph 133, WaveEdit Sohler52, Vowel Bass 007, WaveEdit Grav_b3, Consonant 025, Consonant 146, Chord 018, Overtone 047, Chord 038, Sampled 127, Metal 009, Organ 014, Consonant 033, Vowel Bass 035, Consonant 001, WaveEdit Iterativ, Consonant 129, Tube 066, Organ 025, Vowel Tenor 012, Chord 039, Sampled 106, Sampled 207, Breath 013, WaveEdit Grav_c2, Consonant 079, Otmorph 119, Consonant 064, WaveEdit Ppg_wa18, WaveEdit Pd103, Overtone 033, Chord 013, Vowel Bass 014, Sampled 226, Chord 011, Sampled 048, Vowel Tenor 037, Otmorph 095, Organ 012, Vowel Tenor 019, Overtone 015, Overtone 054, Consonant 088, Consonant 108, Sampled 197, Organ 037, Choir 004, Vowel Bass 030, Resonator 019, Otmorph 086, Tube 074, Tube 089, Sampled 182, Organ 038, Sampled 173, Consonant 060, Otmorph 030, Sampled 138, Consonant 056, Otmorph 132, Otmorph 138, Glass 003, Vowel Bass 021, Vowel Tenor 036, Organ 033, Sampled 214, Consonant 081, Consonant 094, Consonant 028, Consonant 003, Vowel Soprano 035, Consonant 126, Vowel Bass 027, Chord 000, Resonator 010, Choir 026, Metal 015, AKWF 0018-02, Consonant 046, Otmorph 079, Vowel Tenor 024, Consonant 117, Choir 025, Overtone 067, Chord 016, Otmorph 109, Vowel Alto 001, Otmorph 089, Consonant 077, Shimmer 033, Otmorph 022, Consonant 144, Organ 000, Consonant

		139, Consonant 106, Vowel Bass 039, Otmorph 043, Vowel Tenor 033, Resonator 012, Otmorph 059, Otmorph 073, Sampled 093, Overtone 055, Sampled 189, Otmorph 068, Otmorph 064, Breath 029, Chord 033, Sampled 108, Consonant 030, Bowed 075, Organ 011, Vowel Tenor 006, Otmorph 056, AKWF 0006-02, Glass 037, Vowel Bass 001, WaveEdit Tidyb026, WaveEdit Sohler39, Sampled 076, Organ 021, WaveEdit Harmonio, WaveEdit Grav_c9, Consonant 037, WaveEdit Sine_a02, WaveEdit High_fre, WaveEdit Tidyb024, AKWF hvoice-01, WaveEdit Sohler58, WaveEdit Ppg_wa29, Vowel Bass 036, WaveEdit Sohler19, WaveEdit Sohler53, WaveEdit Sohler94, Glass 023, Chord 031, WaveEdit Access_v, Bowed 079, AKWF c604-01, WaveEdit Sohler56, WaveEdit Tidyb017, WaveEdit Sohler11, Overtone 018, Consonant 032, Reed 034, WaveEdit Mk_dwg_h, WaveEdit Grav_c3, WaveEdit Fracta01, WaveEdit Synlp54, WaveEdit Tidyb062, WaveEdit Envelo01, Vowel Tenor 005, WaveEdit Tidyb004, Chord 008, AKWF bitreduced-01, AKWF bw-saw-01, Overtone 053, WaveEdit Grav_a6, WaveEdit Sohler26, Sampled 066, WaveEdit Sohler86, Tube 036, Otmorph 014, WaveEdit Sohler76, WaveEdit Sohler27, Choir 030, WaveEdit Bank_410, WaveEdit Tidyb018, WaveEdit Alpha_2, WaveEdit Tidyb003, WaveEdit Sohler35, WaveEdit Lfo_play, WaveEdit Ppg_wa01, WaveEdit Ppg_wa02, WaveEdit Prophe00, Vowel Tenor 011, Tube 072, WaveEdit Tidyb058, Consonant 137, WaveEdit Sohler31, Consonant 076, WaveEdit Just_ran, Consonant 080, WaveEdit Grav_a5, WaveEdit Sohler14, Resonator 020, WaveEdit Grav_a1, Glass 020, WaveEdit Sohler97, Chord 028, WaveEdit Grav_a2, Vowel Bass 034, WaveEdit Sohler70, Breath 031, AKWF oscchip-03, WaveEdit Sohler84, Consonant 149, WaveEdit Tidyb041, Consonant 023, Otmorph 126, Bowed 054, WaveEdit Mixed_as, Otmorph 084, WaveEdit Twist31, WaveEdit Spectr05, WaveEdit Sohler92, WaveEdit Isobelle, Chord 021, Consonant 067, WaveEdit Envelope, Sub 003, WaveEdit Sohler79, Tube 002, Consonant 008, WaveEdit Ppg_wa03, Pluck 028, Vowel Alto 012, AKWF epiano-01, AKWF bw-squ-02, Organ 005, WaveEdit Sine2saw, Vowel Alto 039, Glass 004, WaveEdit Sohler43, Sampled 109, Vowel Alto 003, Glass 010, AKWF clarinett-01, WaveEdit Sohler18, Sampled 170, Tube 046, Vowel Tenor 017, WaveEdit Foldfeed, Tube 008, AKWF 0015-01, Otmorph 106, Overtone 037, Consonant 022, Breath 019, WaveEdit Ppg_wa07, Sampled 164, WaveEdit Sine_mut, Vowel Alto 007, Sampled 211, Metal 025, Glass 007, Vowel Soprano 011, Glass 024, AKWF 0008-01, Vowel Soprano 033, Shimmer 002, Pure 015, WaveEdit Geometri, Sampled 203, Chord 007, Vowel Soprano 005, AKWF altosax-01, Vowel Soprano 015, WaveEdit Ppg_wa17, Overtone 010, WaveEdit Synlp159, Sampled 115, WaveEdit Ppg_wa22, Otmorph 112, Vowel Alto 016, Breath 033, Tube 009, Tube 079, Sampled 097, Chord 023, Stack 008, AKWF 0003-01, Glass 038, Metal 016	
Position	`counter.position`	0 .. 1	0.3
Position Env	`counter.pos_env`	-1 .. 1	0
Position Decay	`counter.pos_decay`	10 .. 8000 ms	1500 ms
Position LFO	`counter.pos_lfo_depth`	0 .. 0.5	0.15
LFO Period	`counter.pos_lfo_beats`	0.25 .. 64 beats	16 beats
Cutoff	`counter.cutoff`	200 .. 18000 Hz	7000 Hz
Resonance	`counter.resonance`	0 .. 1	0.15

Env Amount	`counter.env_amount`	0 .. 6 oct	2 oct
Filter Decay	`counter.filter_decay`	5 .. 3000 ms	400 ms
Key Track	`counter.key_track`	0 .. 1	0.5
HP Floor	`counter.hp_floor`	40 .. 400 Hz	400 Hz
HP Track	`counter.hp_track`	0 .. 1 x f0	1 x f0
Attack	`counter.amp_attack`	0.3 .. 2000 ms	5 ms
Decay	`counter.amp_decay`	5 .. 4000 ms	500 ms
Sustain	`counter.amp_sustain`	0 .. 1	0.8
Release	`counter.amp_release`	5 .. 4000 ms	180 ms
Width	`counter.width`	0 .. 1	0.8
Velocity	`counter.vel_sens`	0 .. 1	0.4
Delay Send	`counter.delay_send`	0 .. 1	0.15
Delay Left	`counter.delay_left`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/16
Delay Right	`counter.delay_right`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	1/4
Delay Feedback	`counter.delay_feedback`	0 .. 0.9	0.4
Delay High Pass	`counter.delay_high_pass`	150 .. 2000 Hz	350 Hz
Delay Low Pass	`counter.delay_low_pass`	800 .. 16000 Hz	6000 Hz
Room Send	`counter.room_send`	0 .. 1	0
Hall Send	`counter.hall_send`	0 .. 1	0.25
Duck	`counter.duck`	0 .. 18 dB	1.5 dB
Trance Gate	`counter.gate`	off / on	off
Gate Pattern	`counter.gate_pattern`	Sixteenths, Eighths, Rolling, Gallop, 3-3-2, Triplets, Trance 1, Trance 2, Trance 3	Trance 1
Gate Depth	`counter.gate_depth`	0 .. 1	0.85
Gate Duty	`counter.gate_duty`	0.05 .. 1	0.5
Gate Attack	`counter.gate_attack`	0.5 .. 60 ms	3 ms
Gate Release	`counter.gate_release`	0.5 .. 120 ms	12 ms
Gate Tone	`counter.gate_tone`	0 .. 1	0.4
Level	`counter.level`	-36 .. 6 dB	-12 dB
Disperse	`counter.disperse`	0 .. 8 x	0 x

Disperse Freq	`counter.disperse_freq`	200 .. 8000 Hz	1250 Hz
Drift	`counter.drift`	0 .. 8 ct	1 ct
Filter Type	`counter.filter_type`	Low Pass, Band Pass, High Pass, Notch	Low Pass
Glide	`counter.glide`	0 .. 400 ms	0 ms
Pan	`counter.pan`	-1 .. 1	0.1
Oscillator 2	`counter.osc2`	Off, Supersaw, VA, FM, Wavetable	Off
Osc 2 Mix	`counter.osc2_mix`	0 .. 1	0
Osc 2 Interval	`counter.osc2_interval`	-2 Oct, -1 Oct, -5th, Unison, +5th, +1 Oct	-1 Oct
Osc 2 Detune	`counter.osc2_detune`	-50 .. 50 ct	0 ct
Voice LFO	`counter.lfo_beats`	0.25 .. 64 beats	8 beats
LFO to Cutoff	`counter.lfo_cutoff`	0 .. 4 oct	0 oct
LFO to Pitch	`counter.lfo_pitch`	0 .. 50 ct	0 ct
LFO to Level	`counter.lfo_amp`	0 .. 1	0
Plate Send	`counter.plate_send`	0 .. 1	0
Slow Movement	`counter.slow_mod`	0 .. 1	0
Filter Model	`counter.filter_model`	State Variable, Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder, Korg35 (MS-20), Polivoks, Wasp	State Variable
Filter Mode	`counter.filter_mode`	0 .. 1	0
Filter Attack	`counter.filt_attack`	0.1 .. 4000 ms	0.1 ms
Filter Sustain	`counter.filt_sustain`	0 .. 1	0
Filter Release	`counter.filt_release`	5 .. 8000 ms	300 ms
Mod Attack	`counter.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`counter.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`counter.menv_sustain`	0 .. 1	0
Mod Release	`counter.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`counter.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`counter.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine

LFO 1 Sync	`counter.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`counter.lfo1_retrig`	off / on	off
LFO 1 Fade	`counter.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`counter.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`counter.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`counter.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`counter.lfo2_retrig`	off / on	off
LFO 2 Fade	`counter.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`counter.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`counter.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`counter.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`counter.lfo3_retrig`	off / on	off
LFO 3 Fade	`counter.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`counter.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`counter.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`counter.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`counter.lfo4_retrig`	off / on	off
LFO 4 Fade	`counter.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`counter.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`counter.mx1_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 1 Amount	`counter.mx1_amount`	-1 .. 1	0
Mod 2 Source	`counter.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`counter.mx2_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 2 Amount	`counter.mx2_amount`	-1 .. 1	0

Mod 3 Source	`counter.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`counter.mx3_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 3 Amount	`counter.mx3_amount`	-1 .. 1	0
Mod 4 Source	`counter.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`counter.mx4_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 4 Amount	`counter.mx4_amount`	-1 .. 1	0
Mod 5 Source	`counter.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`counter.mx5_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 5 Amount	`counter.mx5_amount`	-1 .. 1	0
Mod 6 Source	`counter.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`counter.mx6_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 6 Amount	`counter.mx6_amount`	-1 .. 1	0
Mod 7 Source	`counter.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`counter.mx7_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 7 Amount	`counter.mx7_amount`	-1 .. 1	0
Mod 8 Source	`counter.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`counter.mx8_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 8 Amount	`counter.mx8_amount`	-1 .. 1	0

PLUCK

Control	Key	Range	Default
Oscillator	`pluck.osc`	Supersaw, VA, FM, Wavetable	VA
Detune	`pluck.detune`	0 .. 1	0.3
Mix	`pluck.mix`	0 .. 1	0.55
Dynamic Detune	`pluck.dynamic_detune`	0 .. 1	0.6
Wave	`pluck.wave`	0 .. 1	0.15

Pulse Width	`pluck.pulse_width`	0.05 .. 0.95	0.5
FM Ratio	`pluck.fm_ratio`	0.5 .. 8	2
FM Index	`pluck.fm_index`	0 .. 10	2.5
FM Decay	`pluck.fm_decay`	5 .. 2000 ms	250 ms
Table	`pluck.table`	Classic, Vocal, Glass, PWM, Sync, Formant Saw, WaveEdit Hienharm, WaveEdit Junox_ho, WaveEdit Euclidea, WaveEdit Sohler49, WaveEdit Vocal_fo, WaveEdit Pwn_saw, WaveEdit Tidyb030, WaveEdit I_heart, WaveEdit Sine_n, WaveEdit Vocal_00, WaveEdit Supersaw, WaveEdit Tidyb060, Consonant 024, WaveEdit Synlp92, WaveEdit Distorte, WaveEdit Fourier2, WaveEdit Grav_b8, WaveEdit Spectr01, WaveEdit Discorda, WaveEdit Sohler47, WaveEdit Ppg_wa27, WaveEdit Micro_q, WaveEdit Noise_wa, WaveEdit Kuato, WaveEdit Synlp67, WaveEdit Komple01, Consonant 066, WaveEdit Iterat00, WaveEdit Retro_sp, WaveEdit Acid_rin, WaveEdit Meravigl, WaveEdit Tidyb066, WaveEdit Tidyb049, WaveEdit Fracta03, WaveEdit Chebyshe, Sampled 167, WaveEdit Wavetabl, Chord 004, WaveEdit Grav_b6, WaveEdit Sohler33, WaveEdit Ppg_wa13, WaveEdit Pd104, WaveEdit Sohler48, WaveEdit Ppg_wa28, WaveEdit Wavetrip, WaveEdit Cz_ish, WaveEdit Fx_bitno, WaveEdit Tidyb046, WaveEdit Sohler74, WaveEdit Sohler29, WaveEdit Enshtu02, WaveEdit Tidyb072, WaveEdit Tidyb050, WaveEdit Voice_a, Resonator 018, WaveEdit Tidyb035, WaveEdit Tezzalog, AKWF 0004-hollow-01, WaveEdit Lom_a, WaveEdit Tidyb064, WaveEdit Moddrop, WaveEdit Harmomet, Hollow 013, WaveEdit Tidyb065, WaveEdit Ultra_ch, WaveEdit Laser_cr, WaveEdit Ppg_wa05, WaveEdit Drone, WaveEdit Gentle_m, WaveEdit Tidyb067, WaveEdit Tidyb005, Resonator 008, WaveEdit Synlp71, WaveEdit Sohler46, WaveEdit Tidyb077, WaveEdit Tidyb027, WaveEdit Sand_eye, WaveEdit Feedback, WaveEdit Tidyb071, WaveEdit Snake_ey, WaveEdit Hyperbol, AKWF 0018-hollow-01, Overtone 064, WaveEdit Light_00, WaveEdit Crush_ad, Organ 034, Sampled 131, Glass 012, WaveEdit Sohler67, Organ 006, WaveEdit Ppg_wa14, WaveEdit Sq8_sh, AKWF clavinet-hollow-01, Glass 009, WaveEdit Grav_c7, Consonant 100, WaveEdit Sohler51, Vowel Bass 015, Sampled 227, Hollow 005, Sampled 065, AKWF oscchip-04, AKWF raw-01, Hollow 015, AKWF snippets-01, Chord 027, Consonant 071, Chord 020, Consonant 051, WaveEdit Cyborg, Sampled 238, AKWF 0014-hollow-01, Overtone 000, WaveEdit Ppg_wa15, WaveEdit Grav_b4, Consonant 009, WaveEdit Grav_c5, WaveEdit Twist6, Glass 027, Sampled 078, AKWF oscchip-05, Consonant 120, WaveEdit Ppg_wa04, WaveEdit Sohler59, Sampled 081, Otmorph 053, Chord 030, Chord 032, Organ 029, Overtone 108, Hollow 001, WaveEdit Ppg_wa10, WaveEdit Organ_di, AKWF 0009-hollow-01, Tube 042, Vowel Bass 008, Organ 035, Metal 001, Consonant 114, AKWF vgame-03, Sampled 224, Resonator 001, Vowel Bass 038, Sampled 058, Vowel Tenor 038, Glass 026, Chord 019, Otmorph 115, AKWF stereo-04, Consonant 105, Vowel Bass 026, Chord 017, WaveEdit Ppg_wa11, Consonant 109, Sampled 125, Consonant 012, Overtone 046, Glass 016, Otmorph 067, Organ 026, Otmorph 005, Glass 018, Consonant 018, Hollow 023, Overtone 019, Otmorph 070, Consonant 127, Vowel Bass 029, Organ 016, Vowel Bass 017, Sampled 209, Sampled 130, Overtone 038, WaveEdit Reso_ana, Consonant 142, WaveEdit Reso_p00, Chord 009, AKWF distorted-01, Sampled 162, Glass 006, Metal 003, WaveEdit Square_p, Sampled 059, Organ 030, Sampled 003, Consonant 036, Chord 034, Sampled 193, WaveEdit Qux_fmy, Vowel Bass 023, Otmorph 133, WaveEdit Sohler52, Vowel Bass 007, WaveEdit Grav_b3, Consonant 025, Consonant 146, Chord 018, Overtone 047, Chord 038, Sampled 127, Metal 009, Organ 014, Consonant 033, Vowel Bass 035, Consonant 001, WaveEdit Iterativ, Consonant 129, Tube 066, Organ 025, Vowel Tenor 012, Chord 039, Sampled	Vocal

		106, Sampled 207, Breath 013, WaveEdit Grav_c2, Consonant 079, Otmorph 119, Consonant 064, WaveEdit Ppg_wa18, WaveEdit Pd103, Overtone 033, Chord 013, Vowel Bass 014, Sampled 226, Chord 011, Sampled 048, Vowel Tenor 037, Otmorph 095, Organ 012, Vowel Tenor 019, Overtone 015, Overtone 054, Consonant 088, Consonant 108, Sampled 197, Organ 037, Choir 004, Vowel Bass 030, Resonator 019, Otmorph 086, Tube 074, Tube 089, Sampled 182, Organ 038, Sampled 173, Consonant 060, Otmorph 030, Sampled 138, Consonant 056, Otmorph 132, Otmorph 138, Glass 003, Vowel Bass 021, Vowel Tenor 036, Organ 033, Sampled 214, Consonant 081, Consonant 094, Consonant 028, Consonant 003, Vowel Soprano 035, Consonant 126, Vowel Bass 027, Chord 000, Resonator 010, Choir 026, Metal 015, AKWF 0018-02, Consonant 046, Otmorph 079, Vowel Tenor 024, Consonant 117, Choir 025, Overtone 067, Chord 016, Otmorph 109, Vowel Alto 001, Otmorph 089, Consonant 077, Shimmer 033, Otmorph 022, Consonant 144, Organ 000, Consonant 139, Consonant 106, Vowel Bass 039, Otmorph 043, Vowel Tenor 033, Resonator 012, Otmorph 059, Otmorph 073, Sampled 093, Overtone 055, Sampled 189, Otmorph 068, Otmorph 064, Breath 029, Chord 033, Sampled 108, Consonant 030, Bowed 075, Organ 011, Vowel Tenor 006, Otmorph 056, AKWF 0006-02, Glass 037, Vowel Bass 001, WaveEdit Tidyb026, WaveEdit Sohler39, Sampled 076, Organ 021, WaveEdit Harmonio, WaveEdit Grav_c9, Consonant 037, WaveEdit Sine_a02, WaveEdit High_fre, WaveEdit Tidyb024, AKWF hvoice-01, WaveEdit Sohler58, WaveEdit Ppg_wa29, Vowel Bass 036, WaveEdit Sohler19, WaveEdit Sohler53, WaveEdit Sohler94, Glass 023, Chord 031, WaveEdit Access_v, Bowed 079, AKWF c604-01, WaveEdit Sohler56, WaveEdit Tidyb017, WaveEdit Sohler11, Overtone 018, Consonant 032, Reed 034, WaveEdit Mk_dwg_h, WaveEdit Grav_c3, WaveEdit Fracta01, WaveEdit Synlp54, WaveEdit Tidyb062, WaveEdit Envelo01, Vowel Tenor 005, WaveEdit Tidyb004, Chord 008, AKWF bitreduced-01, AKWF bw-saw-01, Overtone 053, WaveEdit Grav_a6, WaveEdit Sohler26, Sampled 066, WaveEdit Sohler86, Tube 036, Otmorph 014, WaveEdit Sohler76, WaveEdit Sohler27, Choir 030, WaveEdit Bank_410, WaveEdit Tidyb018, WaveEdit Alpha_2, WaveEdit Tidyb003, WaveEdit Sohler35, WaveEdit Lfo_play, WaveEdit Ppg_wa01, WaveEdit Ppg_wa02, WaveEdit Prophe00, Vowel Tenor 011, Tube 072, WaveEdit Tidyb058, Consonant 137, WaveEdit Sohler31, Consonant 076, WaveEdit Just_ran, Consonant 080, WaveEdit Grav_a5, WaveEdit Sohler14, Resonator 020, WaveEdit Grav_a1, Glass 020, WaveEdit Sohler97, Chord 028, WaveEdit Grav_a2, Vowel Bass 034, WaveEdit Sohler70, Breath 031, AKWF oscchip-03, WaveEdit Sohler84, Consonant 149, WaveEdit Tidyb041, Consonant 023, Otmorph 126, Bowed 054, WaveEdit Mixed_as, Otmorph 084, WaveEdit Twist31, WaveEdit Spectr05, WaveEdit Sohler92, WaveEdit Isobelle, Chord 021, Consonant 067, WaveEdit Envelope, Sub 003, WaveEdit Sohler79, Tube 002, Consonant 008, WaveEdit Ppg_wa03, Pluck 028, Vowel Alto 012, AKWF epiano-01, AKWF bw-squ-02, Organ 005, WaveEdit Sine2saw, Vowel Alto 039, Glass 004, WaveEdit Sohler43, Sampled 109, Vowel Alto 003, Glass 010, AKWF clarinett-01, WaveEdit Sohler18, Sampled 170, Tube 046, Vowel Tenor 017, WaveEdit Foldfeed, Tube 008, AKWF 0015-01, Otmorph 106, Overtone 037, Consonant 022, Breath 019, WaveEdit Ppg_wa07, Sampled 164, WaveEdit Sine_mut, Vowel Alto 007, Sampled 211, Metal 025, Glass 007, Vowel Soprano 011, Glass 024, AKWF 0008-01, Vowel Soprano 033, Shimmer 002, Pure 015, WaveEdit Geometri, Sampled 203, Chord 007, Vowel Soprano 005, AKWF altosax-01, Vowel Soprano 015, WaveEdit Ppg_wa17, Overtone 010, WaveEdit Synlp159, Sampled 115, WaveEdit Ppg_wa22, Otmorph 112, Vowel Alto 016, Breath 033, Tube 009, Tube 079, Sampled 097, Chord 023, Stack 008, AKWF 0003-01, Glass 038, Metal 016	
Position	`pluck.position`	0 .. 1	0.3

Position Env	`pluck.pos_env`	-1 .. 1	0
Position Decay	`pluck.pos_decay`	10 .. 8000 ms	1500 ms
Position LFO	`pluck.pos_lfo_depth`	0 .. 0.5	0.15
LFO Period	`pluck.pos_lfo_beats`	0.25 .. 64 beats	16 beats
Cutoff	`pluck.cutoff`	200 .. 18000 Hz	1800 Hz
Resonance	`pluck.resonance`	0 .. 1	0.2
Env Amount	`pluck.env_amount`	0 .. 6 oct	3.2 oct
Filter Decay	`pluck.filter_decay`	5 .. 3000 ms	180 ms
Key Track	`pluck.key_track`	0 .. 1	0.5
HP Floor	`pluck.hp_floor`	40 .. 400 Hz	200 Hz
HP Track	`pluck.hp_track`	0 .. 1 x f0	1 x f0
Attack	`pluck.amp_attack`	0.3 .. 2000 ms	0.3 ms
Decay	`pluck.amp_decay`	5 .. 4000 ms	260 ms
Sustain	`pluck.amp_sustain`	0 .. 1	0
Release	`pluck.amp_release`	5 .. 4000 ms	200 ms
Width	`pluck.width`	0 .. 1	0.9
Velocity	`pluck.vel_sens`	0 .. 1	0.4
Delay Send	`pluck.delay_send`	0 .. 1	0.22
Delay Left	`pluck.delay_left`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/16
Delay Right	`pluck.delay_right`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	1/8
Delay Feedback	`pluck.delay_feedback`	0 .. 0.9	0.25
Delay High Pass	`pluck.delay_high_pass`	150 .. 2000 Hz	350 Hz
Delay Low Pass	`pluck.delay_low_pass`	800 .. 16000 Hz	6000 Hz
Room Send	`pluck.room_send`	0 .. 1	0.25
Hall Send	`pluck.hall_send`	0 .. 1	0.05
Duck	`pluck.duck`	0 .. 18 dB	3 dB
Trance Gate	`pluck.gate`	off / on	off
Gate Pattern	`pluck.gate_pattern`	Sixteenths, Eighths, Rolling, Gallop, 3-3-2, Triplets, Trance 1, Trance 2, Trance 3	Trance 1

Gate Depth	`pluck.gate_depth`	0 .. 1	0.85
Gate Duty	`pluck.gate_duty`	0.05 .. 1	0.5
Gate Attack	`pluck.gate_attack`	0.5 .. 60 ms	3 ms
Gate Release	`pluck.gate_release`	0.5 .. 120 ms	12 ms
Gate Tone	`pluck.gate_tone`	0 .. 1	0.4
Level	`pluck.level`	-36 .. 6 dB	-8 dB
Disperse	`pluck.disperse`	0 .. 8 x	0 x
Disperse Freq	`pluck.disperse_freq`	200 .. 8000 Hz	1250 Hz
Drift	`pluck.drift`	0 .. 8 ct	1 ct
Filter Type	`pluck.filter_type`	Low Pass, Band Pass, High Pass, Notch	Low Pass
Glide	`pluck.glide`	0 .. 400 ms	0 ms
Pan	`pluck.pan`	-1 .. 1	0
Oscillator 2	`pluck.osc2`	Off, Supersaw, VA, FM, Wavetable	Off
Osc 2 Mix	`pluck.osc2_mix`	0 .. 1	0
Osc 2 Interval	`pluck.osc2_interval`	-2 Oct, -1 Oct, -5th, Unison, +5th, +1 Oct	-1 Oct
Osc 2 Detune	`pluck.osc2_detune`	-50 .. 50 ct	0 ct
Voice LFO	`pluck.lfo_beats`	0.25 .. 64 beats	8 beats
LFO to Cutoff	`pluck.lfo_cutoff`	0 .. 4 oct	0 oct
LFO to Pitch	`pluck.lfo_pitch`	0 .. 50 ct	0 ct
LFO to Level	`pluck.lfo_amp`	0 .. 1	0
Plate Send	`pluck.plate_send`	0 .. 1	0.05
Slow Movement	`pluck.slow_mod`	0 .. 1	0
Filter Model	`pluck.filter_model`	State Variable, Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder, Korg35 (MS-20), Polivoks, Wasp	State Variable
Filter Mode	`pluck.filter_mode`	0 .. 1	0
Filter Attack	`pluck.filt_attack`	0.1 .. 4000 ms	0.1 ms
Filter Sustain	`pluck.filt_sustain`	0 .. 1	0
Filter Release	`pluck.filt_release`	5 .. 8000 ms	300 ms

Mod Attack	`pluck.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`pluck.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`pluck.menv_sustain`	0 .. 1	0
Mod Release	`pluck.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`pluck.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`pluck.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`pluck.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`pluck.lfo1_retrig`	off / on	off
LFO 1 Fade	`pluck.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`pluck.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`pluck.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`pluck.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`pluck.lfo2_retrig`	off / on	off
LFO 2 Fade	`pluck.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`pluck.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`pluck.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`pluck.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`pluck.lfo3_retrig`	off / on	off
LFO 3 Fade	`pluck.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`pluck.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`pluck.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`pluck.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`pluck.lfo4_retrig`	off / on	off
LFO 4 Fade	`pluck.lfo4_fade`	0 .. 8 s	0 s

Mod 1 Source	`pluck.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`pluck.mx1_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 1 Amount	`pluck.mx1_amount`	-1 .. 1	0
Mod 2 Source	`pluck.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`pluck.mx2_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 2 Amount	`pluck.mx2_amount`	-1 .. 1	0
Mod 3 Source	`pluck.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`pluck.mx3_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 3 Amount	`pluck.mx3_amount`	-1 .. 1	0
Mod 4 Source	`pluck.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`pluck.mx4_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 4 Amount	`pluck.mx4_amount`	-1 .. 1	0
Mod 5 Source	`pluck.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`pluck.mx5_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 5 Amount	`pluck.mx5_amount`	-1 .. 1	0
Mod 6 Source	`pluck.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`pluck.mx6_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 6 Amount	`pluck.mx6_amount`	-1 .. 1	0
Mod 7 Source	`pluck.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`pluck.mx7_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 7 Amount	`pluck.mx7_amount`	-1 .. 1	0
Mod 8 Source	`pluck.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`pluck.mx8_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off

Mod 8 Amount	`pluck.mx8_amount`	-1 .. 1	0

ARP

Control	Key	Range	Default
Oscillator	`arp.osc`	Supersaw, VA, FM, Wavetable	VA
Detune	`arp.detune`	0 .. 1	0.2
Mix	`arp.mix`	0 .. 1	0.5
Dynamic Detune	`arp.dynamic_detune`	0 .. 1	0.6
Wave	`arp.wave`	0 .. 1	0.1
Pulse Width	`arp.pulse_width`	0.05 .. 0.95	0.5
FM Ratio	`arp.fm_ratio`	0.5 .. 8	2
FM Index	`arp.fm_index`	0 .. 10	2.5
FM Decay	`arp.fm_decay`	5 .. 2000 ms	250 ms
Table	`arp.table`	Classic, Vocal, Glass, PWM, Sync, Formant Saw, WaveEdit Hienharm, WaveEdit Junox_ho, WaveEdit Euclidea, WaveEdit Sohler49, WaveEdit Vocal_fo, WaveEdit Pwn_saw, WaveEdit Tidyb030, WaveEdit I_heart, WaveEdit Sine_n, WaveEdit Vocal_00, WaveEdit Supersaw, WaveEdit Tidyb060, Consonant 024, WaveEdit Synlp92, WaveEdit Distorte, WaveEdit Fourier2, WaveEdit Grav_b8, WaveEdit Spectr01, WaveEdit Discorda, WaveEdit Sohler47, WaveEdit Ppg_wa27, WaveEdit Micro_q, WaveEdit Noise_wa, WaveEdit Kuato, WaveEdit Synlp67, WaveEdit Komple01, Consonant 066, WaveEdit Iterat00, WaveEdit Retro_sp, WaveEdit Acid_rin, WaveEdit Meravigl, WaveEdit Tidyb066, WaveEdit Tidyb049, WaveEdit Fracta03, WaveEdit Chebyshe, Sampled 167, WaveEdit Wavetabl, Chord 004, WaveEdit Grav_b6, WaveEdit Sohler33, WaveEdit Ppg_wa13, WaveEdit Pd104, WaveEdit Sohler48, WaveEdit Ppg_wa28, WaveEdit Wavetrip, WaveEdit Cz_ish, WaveEdit Fx_bitno, WaveEdit Tidyb046, WaveEdit Sohler74, WaveEdit Sohler29, WaveEdit Enshtu02, WaveEdit Tidyb072, WaveEdit Tidyb050, WaveEdit Voice_a, Resonator 018, WaveEdit Tidyb035, WaveEdit Tezzalog, AKWF 0004-hollow-01, WaveEdit Lom_a, WaveEdit Tidyb064, WaveEdit Moddrop, WaveEdit Harmomet, Hollow 013, WaveEdit Tidyb065, WaveEdit Ultra_ch, WaveEdit Laser_cr, WaveEdit Ppg_wa05, WaveEdit Drone, WaveEdit Gentle_m, WaveEdit Tidyb067, WaveEdit Tidyb005, Resonator 008, WaveEdit Synlp71, WaveEdit Sohler46, WaveEdit Tidyb077, WaveEdit Tidyb027, WaveEdit Sand_eye, WaveEdit Feedback, WaveEdit Tidyb071, WaveEdit Snake_ey, WaveEdit Hyperbol, AKWF 0018-hollow-01, Overtone 064, WaveEdit Light_00, WaveEdit Crush_ad, Organ 034, Sampled 131, Glass 012, WaveEdit Sohler67, Organ 006, WaveEdit Ppg_wa14, WaveEdit Sq8_sh, AKWF clavinet-hollow-01, Glass 009, WaveEdit Grav_c7, Consonant 100, WaveEdit Sohler51, Vowel Bass 015, Sampled 227, Hollow 005, Sampled 065, AKWF oscchip-04, AKWF raw-01, Hollow 015, AKWF snippets-01, Chord 027, Consonant 071, Chord 020, Consonant 051, WaveEdit Cyborg, Sampled 238, AKWF 0014-hollow-01, Overtone 000, WaveEdit Ppg_wa15, WaveEdit Grav_b4, Consonant 009, WaveEdit Grav_c5, WaveEdit Twist6, Glass 027, Sampled 078, AKWF oscchip-05, Consonant 120, WaveEdit Ppg_wa04, WaveEdit Sohler59, Sampled 081, Otmorph 053, Chord 030, Chord 032, Organ 029, Overtone 108, Hollow 001, WaveEdit Ppg_wa10, WaveEdit Organ_di, AKWF 0009-hollow-01, Tube 042, Vowel Bass 008, Organ 035, Metal 001, Consonant 114, AKWF vgame-03, Sampled 224, Resonator 001, Vowel Bass 038, Sampled 058, Vowel Tenor 038, Glass 026, Chord 019,	Vocal

Otmorph 115, AKWF stereo-04, Consonant 105, Vowel Bass 026, Chord 017, WaveEdit Ppg_wa11, Consonant 109, Sampled 125, Consonant 012, Overtone 046, Glass 016, Otmorph 067, Organ 026, Otmorph 005, Glass 018, Consonant 018, Hollow 023, Overtone 019, Otmorph 070, Consonant 127, Vowel Bass 029, Organ 016, Vowel Bass 017, Sampled 209, Sampled 130, Overtone 038, WaveEdit Reso_ana, Consonant 142, WaveEdit Reso_p00, Chord 009, AKWF distorted-01, Sampled 162, Glass 006, Metal 003, WaveEdit Square_p, Sampled 059, Organ 030, Sampled 003, Consonant 036, Chord 034, Sampled 193, WaveEdit Qux_fmy, Vowel Bass 023, Otmorph 133, WaveEdit Sohler52, Vowel Bass 007, WaveEdit Grav_b3, Consonant 025, Consonant 146, Chord 018, Overtone 047, Chord 038, Sampled 127, Metal 009, Organ 014, Consonant 033, Vowel Bass 035, Consonant 001, WaveEdit Iterativ, Consonant 129, Tube 066, Organ 025, Vowel Tenor 012, Chord 039, Sampled 106, Sampled 207, Breath 013, WaveEdit Grav_c2, Consonant 079, Otmorph 119, Consonant 064, WaveEdit Ppg_wa18, WaveEdit Pd103, Overtone 033, Chord 013, Vowel Bass 014, Sampled 226, Chord 011, Sampled 048, Vowel Tenor 037, Otmorph 095, Organ 012, Vowel Tenor 019, Overtone 015, Overtone 054, Consonant 088, Consonant 108, Sampled 197, Organ 037, Choir 004, Vowel Bass 030, Resonator 019, Otmorph 086, Tube 074, Tube 089, Sampled 182, Organ 038, Sampled 173, Consonant 060, Otmorph 030, Sampled 138, Consonant 056, Otmorph 132, Otmorph 138, Glass 003, Vowel Bass 021, Vowel Tenor 036, Organ 033, Sampled 214, Consonant 081, Consonant 094, Consonant 028, Consonant 003, Vowel Soprano 035, Consonant 126, Vowel Bass 027, Chord 000, Resonator 010, Choir 026, Metal 015, AKWF 0018-02, Consonant 046, Otmorph 079, Vowel Tenor 024, Consonant 117, Choir 025, Overtone 067, Chord 016, Otmorph 109, Vowel Alto 001, Otmorph 089, Consonant 077, Shimmer 033, Otmorph 022, Consonant 144, Organ 000, Consonant 139, Consonant 106, Vowel Bass 039, Otmorph 043, Vowel Tenor 033, Resonator 012, Otmorph 059, Otmorph 073, Sampled 093, Overtone 055, Sampled 189, Otmorph 068, Otmorph 064, Breath 029, Chord 033, Sampled 108, Consonant 030, Bowed 075, Organ 011, Vowel Tenor 006, Otmorph 056, AKWF 0006-02, Glass 037, Vowel Bass 001, WaveEdit Tidyb026, WaveEdit Sohler39, Sampled 076, Organ 021, WaveEdit Harmonio, WaveEdit Grav_c9, Consonant 037, WaveEdit Sine_a02, WaveEdit High_fre, WaveEdit Tidyb024, AKWF hvoice-01, WaveEdit Sohler58, WaveEdit Ppg_wa29, Vowel Bass 036, WaveEdit Sohler19, WaveEdit Sohler53, WaveEdit Sohler94, Glass 023, Chord 031, WaveEdit Access_v, Bowed 079, AKWF c604-01, WaveEdit Sohler56, WaveEdit Tidyb017, WaveEdit Sohler11, Overtone 018, Consonant 032, Reed 034, WaveEdit Mk_dwg_h, WaveEdit Grav_c3, WaveEdit Fracta01, WaveEdit Synlp54, WaveEdit Tidyb062, WaveEdit Envelo01, Vowel Tenor 005, WaveEdit Tidyb004, Chord 008, AKWF bitreduced-01, AKWF bw-saw-01, Overtone 053, WaveEdit Grav_a6, WaveEdit Sohler26, Sampled 066, WaveEdit Sohler86, Tube 036, Otmorph 014, WaveEdit Sohler76, WaveEdit Sohler27, Choir 030, WaveEdit Bank_410, WaveEdit Tidyb018, WaveEdit Alpha_2, WaveEdit Tidyb003, WaveEdit Sohler35, WaveEdit Lfo_play, WaveEdit Ppg_wa01, WaveEdit Ppg_wa02, WaveEdit Prophe00, Vowel Tenor 011, Tube 072, WaveEdit Tidyb058, Consonant 137, WaveEdit Sohler31, Consonant 076, WaveEdit Just_ran, Consonant 080, WaveEdit Grav_a5, WaveEdit Sohler14, Resonator 020, WaveEdit Grav_a1, Glass 020, WaveEdit Sohler97, Chord 028, WaveEdit Grav_a2, Vowel Bass 034, WaveEdit Sohler70, Breath 031, AKWF oscchip-03, WaveEdit Sohler84, Consonant 149, WaveEdit Tidyb041, Consonant 023, Otmorph 126, Bowed 054, WaveEdit Mixed_as, Otmorph 084, WaveEdit Twist31, WaveEdit Spectr05, WaveEdit Sohler92, WaveEdit Isobelle, Chord 021, Consonant 067, WaveEdit Envelope, Sub 003, WaveEdit Sohler79, Tube 002, Consonant 008, WaveEdit Ppg_wa03, Pluck 028, Vowel Alto 012, AKWF epiano-01, AKWF bw-squ-02, Organ 005, WaveEdit Sine2saw, Vowel Alto 039, Glass 004, WaveEdit Sohler43, Sampled 109, Vowel Alto 003, Glass 010, AKWF clarinett-01, WaveEdit Sohler18, Sampled 170, Tube 046,

		Vowel Tenor 017, WaveEdit Foldfeed, Tube 008, AKWF 0015-01, Otmorph 106, Overtone 037, Consonant 022, Breath 019, WaveEdit Ppg_wa07, Sampled 164, WaveEdit Sine_mut, Vowel Alto 007, Sampled 211, Metal 025, Glass 007, Vowel Soprano 011, Glass 024, AKWF 0008-01, Vowel Soprano 033, Shimmer 002, Pure 015, WaveEdit Geometri, Sampled 203, Chord 007, Vowel Soprano 005, AKWF altosax-01, Vowel Soprano 015, WaveEdit Ppg_wa17, Overtone 010, WaveEdit Synlp159, Sampled 115, WaveEdit Ppg_wa22, Otmorph 112, Vowel Alto 016, Breath 033, Tube 009, Tube 079, Sampled 097, Chord 023, Stack 008, AKWF 0003-01, Glass 038, Metal 016	
Position	`arp.position`	0 .. 1	0.3
Position Env	`arp.pos_env`	-1 .. 1	0
Position Decay	`arp.pos_decay`	10 .. 8000 ms	1500 ms
Position LFO	`arp.pos_lfo_depth`	0 .. 0.5	0.15
LFO Period	`arp.pos_lfo_beats`	0.25 .. 64 beats	16 beats
Cutoff	`arp.cutoff`	200 .. 18000 Hz	2600 Hz
Resonance	`arp.resonance`	0 .. 1	0.15
Env Amount	`arp.env_amount`	0 .. 6 oct	2.5 oct
Filter Decay	`arp.filter_decay`	5 .. 3000 ms	120 ms
Key Track	`arp.key_track`	0 .. 1	0.5
HP Floor	`arp.hp_floor`	40 .. 400 Hz	300 Hz
HP Track	`arp.hp_track`	0 .. 1 x f0	1 x f0
Attack	`arp.amp_attack`	0.3 .. 2000 ms	0.3 ms
Decay	`arp.amp_decay`	5 .. 4000 ms	150 ms
Sustain	`arp.amp_sustain`	0 .. 1	0
Release	`arp.amp_release`	5 .. 4000 ms	60 ms
Width	`arp.width`	0 .. 1	0.8
Velocity	`arp.vel_sens`	0 .. 1	0.4
Delay Send	`arp.delay_send`	0 .. 1	0.2
Delay Left	`arp.delay_left`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/8
Delay Right	`arp.delay_right`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/16
Delay Feedback	`arp.delay_feedback`	0 .. 0.9	0.3
Delay High Pass	`arp.delay_high_pass`	150 .. 2000 Hz	350 Hz
Delay Low Pass	`arp.delay_low_pass`	800 .. 16000 Hz	6000 Hz

Room Send	`arp.room_send`	0 .. 1	0.15
Hall Send	`arp.hall_send`	0 .. 1	0.1
Duck	`arp.duck`	0 .. 18 dB	3 dB
Trance Gate	`arp.gate`	off / on	off
Gate Pattern	`arp.gate_pattern`	Sixteenths, Eighths, Rolling, Gallop, 3-3-2, Triplets, Trance 1, Trance 2, Trance 3	Trance 1
Gate Depth	`arp.gate_depth`	0 .. 1	0.85
Gate Duty	`arp.gate_duty`	0.05 .. 1	0.5
Gate Attack	`arp.gate_attack`	0.5 .. 60 ms	3 ms
Gate Release	`arp.gate_release`	0.5 .. 120 ms	12 ms
Gate Tone	`arp.gate_tone`	0 .. 1	0.4
Level	`arp.level`	-36 .. 6 dB	-11 dB
Disperse	`arp.disperse`	0 .. 8 x	0 x
Disperse Freq	`arp.disperse_freq`	200 .. 8000 Hz	1250 Hz
Drift	`arp.drift`	0 .. 8 ct	1 ct
Filter Type	`arp.filter_type`	Low Pass, Band Pass, High Pass, Notch	Low Pass
Glide	`arp.glide`	0 .. 400 ms	0 ms
Pan	`arp.pan`	-1 .. 1	0.15
Oscillator 2	`arp.osc2`	Off, Supersaw, VA, FM, Wavetable	Off
Osc 2 Mix	`arp.osc2_mix`	0 .. 1	0
Osc 2 Interval	`arp.osc2_interval`	-2 Oct, -1 Oct, -5th, Unison, +5th, +1 Oct	-1 Oct
Osc 2 Detune	`arp.osc2_detune`	-50 .. 50 ct	0 ct
Voice LFO	`arp.lfo_beats`	0.25 .. 64 beats	8 beats
LFO to Cutoff	`arp.lfo_cutoff`	0 .. 4 oct	0 oct
LFO to Pitch	`arp.lfo_pitch`	0 .. 50 ct	0 ct
LFO to Level	`arp.lfo_amp`	0 .. 1	0
Plate Send	`arp.plate_send`	0 .. 1	0
Slow Movement	`arp.slow_mod`	0 .. 1	0
Filter Model	`arp.filter_model`	State Variable, Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder, Korg35 (MS-20), Polivoks, Wasp	State Variable

Filter Mode	`arp.filter_mode`	0 .. 1	0
Filter Attack	`arp.filt_attack`	0.1 .. 4000 ms	0.1 ms
Filter Sustain	`arp.filt_sustain`	0 .. 1	0
Filter Release	`arp.filt_release`	5 .. 8000 ms	300 ms
Mod Attack	`arp.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`arp.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`arp.menv_sustain`	0 .. 1	0
Mod Release	`arp.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`arp.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`arp.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`arp.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`arp.lfo1_retrig`	off / on	off
LFO 1 Fade	`arp.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`arp.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`arp.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`arp.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`arp.lfo2_retrig`	off / on	off
LFO 2 Fade	`arp.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`arp.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`arp.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`arp.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`arp.lfo3_retrig`	off / on	off
LFO 3 Fade	`arp.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`arp.lfo4_rate`	0.01 .. 40 Hz	1 Hz

LFO 4 Shape	`arp.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`arp.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`arp.lfo4_retrig`	off / on	off
LFO 4 Fade	`arp.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`arp.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`arp.mx1_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 1 Amount	`arp.mx1_amount`	-1 .. 1	0
Mod 2 Source	`arp.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`arp.mx2_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 2 Amount	`arp.mx2_amount`	-1 .. 1	0
Mod 3 Source	`arp.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`arp.mx3_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 3 Amount	`arp.mx3_amount`	-1 .. 1	0
Mod 4 Source	`arp.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`arp.mx4_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 4 Amount	`arp.mx4_amount`	-1 .. 1	0
Mod 5 Source	`arp.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`arp.mx5_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 5 Amount	`arp.mx5_amount`	-1 .. 1	0
Mod 6 Source	`arp.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`arp.mx6_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 6 Amount	`arp.mx6_amount`	-1 .. 1	0
Mod 7 Source	`arp.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 7 Target	`arp.mx7_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 7 Amount	`arp.mx7_amount`	-1 .. 1	0
Mod 8 Source	`arp.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`arp.mx8_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 8 Amount	`arp.mx8_amount`	-1 .. 1	0

PAD

Control	Key	Range	Default
Oscillator	`pad.osc`	Supersaw, VA, FM, Wavetable	Supersaw
Detune	`pad.detune`	0 .. 1	0.5
Mix	`pad.mix`	0 .. 1	0.85
Dynamic Detune	`pad.dynamic_detune`	0 .. 1	0
Wave	`pad.wave`	0 .. 1	0
Pulse Width	`pad.pulse_width`	0.05 .. 0.95	0.5
FM Ratio	`pad.fm_ratio`	0.5 .. 8	2
FM Index	`pad.fm_index`	0 .. 10	2.5
FM Decay	`pad.fm_decay`	5 .. 2000 ms	250 ms
Table	`pad.table`	Classic, Vocal, Glass, PWM, Sync, Formant Saw, WaveEdit Hienharm, WaveEdit Junox_ho, WaveEdit Euclidea, WaveEdit Sohler49, WaveEdit Vocal_fo, WaveEdit Pwn_saw, WaveEdit Tidyb030, WaveEdit I_heart, WaveEdit Sine_n, WaveEdit Vocal_00, WaveEdit Supersaw, WaveEdit Tidyb060, Consonant 024, WaveEdit Synlp92, WaveEdit Distorte, WaveEdit Fourier2, WaveEdit Grav_b8, WaveEdit Spectr01, WaveEdit Discorda, WaveEdit Sohler47, WaveEdit Ppg_wa27, WaveEdit Micro_q, WaveEdit Noise_wa, WaveEdit Kuato, WaveEdit Synlp67, WaveEdit Komple01, Consonant 066, WaveEdit Iterat00, WaveEdit Retro_sp, WaveEdit Acid_rin, WaveEdit Meravigl, WaveEdit Tidyb066, WaveEdit Tidyb049, WaveEdit Fracta03, WaveEdit Chebyshe, Sampled 167, WaveEdit Wavetabl, Chord 004, WaveEdit Grav_b6, WaveEdit Sohler33, WaveEdit Ppg_wa13, WaveEdit Pd104, WaveEdit Sohler48, WaveEdit Ppg_wa28, WaveEdit Wavetrip, WaveEdit Cz_ish, WaveEdit Fx_bitno, WaveEdit Tidyb046, WaveEdit Sohler74, WaveEdit Sohler29, WaveEdit Enshtu02, WaveEdit Tidyb072, WaveEdit Tidyb050, WaveEdit Voice_a, Resonator 018, WaveEdit Tidyb035, WaveEdit Tezzalog, AKWF 0004-hollow-01, WaveEdit Lom_a, WaveEdit Tidyb064, WaveEdit Moddrop, WaveEdit Harmomet, Hollow 013, WaveEdit Tidyb065, WaveEdit Ultra_ch, WaveEdit Laser_cr, WaveEdit Ppg_wa05, WaveEdit Drone, WaveEdit Gentle_m, WaveEdit Tidyb067, WaveEdit Tidyb005, Resonator 008, WaveEdit Synlp71, WaveEdit Sohler46, WaveEdit Tidyb077, WaveEdit Tidyb027, WaveEdit Sand_eye, WaveEdit Feedback, WaveEdit Tidyb071, WaveEdit Snake_ey, WaveEdit Hyperbol, AKWF 0018-hollow-01, Overtone 064, WaveEdit Light_00, WaveEdit Crush_ad, Organ 034, Sampled 131, Glass 012, WaveEdit Sohler67, Organ 006, WaveEdit Ppg_wa14, WaveEdit Sq8_sh, AKWF clavinet-hollow-01, Glass 009, WaveEdit Grav_c7,	Vocal

Consonant 100, WaveEdit Sohler51, Vowel Bass 015, Sampled 227, Hollow 005, Sampled 065, AKWF oscchip-04, AKWF raw-01, Hollow 015, AKWF snippets-01, Chord 027, Consonant 071, Chord 020, Consonant 051, WaveEdit Cyborg, Sampled 238, AKWF 0014-hollow-01, Overtone 000, WaveEdit Ppg_wa15, WaveEdit Grav_b4, Consonant 009, WaveEdit Grav_c5, WaveEdit Twist6, Glass 027, Sampled 078, AKWF oscchip-05, Consonant 120, WaveEdit Ppg_wa04, WaveEdit Sohler59, Sampled 081, Otmorph 053, Chord 030, Chord 032, Organ 029, Overtone 108, Hollow 001, WaveEdit Ppg_wa10, WaveEdit Organ_di, AKWF 0009-hollow-01, Tube 042, Vowel Bass 008, Organ 035, Metal 001, Consonant 114, AKWF vgame-03, Sampled 224, Resonator 001, Vowel Bass 038, Sampled 058, Vowel Tenor 038, Glass 026, Chord 019, Otmorph 115, AKWF stereo-04, Consonant 105, Vowel Bass 026, Chord 017, WaveEdit Ppg_wa11, Consonant 109, Sampled 125, Consonant 012, Overtone 046, Glass 016, Otmorph 067, Organ 026, Otmorph 005, Glass 018, Consonant 018, Hollow 023, Overtone 019, Otmorph 070, Consonant 127, Vowel Bass 029, Organ 016, Vowel Bass 017, Sampled 209, Sampled 130, Overtone 038, WaveEdit Reso_ana, Consonant 142, WaveEdit Reso_p00, Chord 009, AKWF distorted-01, Sampled 162, Glass 006, Metal 003, WaveEdit Square_p, Sampled 059, Organ 030, Sampled 003, Consonant 036, Chord 034, Sampled 193, WaveEdit Qux_fmy, Vowel Bass 023, Otmorph 133, WaveEdit Sohler52, Vowel Bass 007, WaveEdit Grav_b3, Consonant 025, Consonant 146, Chord 018, Overtone 047, Chord 038, Sampled 127, Metal 009, Organ 014, Consonant 033, Vowel Bass 035, Consonant 001, WaveEdit Iterativ, Consonant 129, Tube 066, Organ 025, Vowel Tenor 012, Chord 039, Sampled 106, Sampled 207, Breath 013, WaveEdit Grav_c2, Consonant 079, Otmorph 119, Consonant 064, WaveEdit Ppg_wa18, WaveEdit Pd103, Overtone 033, Chord 013, Vowel Bass 014, Sampled 226, Chord 011, Sampled 048, Vowel Tenor 037, Otmorph 095, Organ 012, Vowel Tenor 019, Overtone 015, Overtone 054, Consonant 088, Consonant 108, Sampled 197, Organ 037, Choir 004, Vowel Bass 030, Resonator 019, Otmorph 086, Tube 074, Tube 089, Sampled 182, Organ 038, Sampled 173, Consonant 060, Otmorph 030, Sampled 138, Consonant 056, Otmorph 132, Otmorph 138, Glass 003, Vowel Bass 021, Vowel Tenor 036, Organ 033, Sampled 214, Consonant 081, Consonant 094, Consonant 028, Consonant 003, Vowel Soprano 035, Consonant 126, Vowel Bass 027, Chord 000, Resonator 010, Choir 026, Metal 015, AKWF 0018-02, Consonant 046, Otmorph 079, Vowel Tenor 024, Consonant 117, Choir 025, Overtone 067, Chord 016, Otmorph 109, Vowel Alto 001, Otmorph 089, Consonant 077, Shimmer 033, Otmorph 022, Consonant 144, Organ 000, Consonant 139, Consonant 106, Vowel Bass 039, Otmorph 043, Vowel Tenor 033, Resonator 012, Otmorph 059, Otmorph 073, Sampled 093, Overtone 055, Sampled 189, Otmorph 068, Otmorph 064, Breath 029, Chord 033, Sampled 108, Consonant 030, Bowed 075, Organ 011, Vowel Tenor 006, Otmorph 056, AKWF 0006-02, Glass 037, Vowel Bass 001, WaveEdit Tidyb026, WaveEdit Sohler39, Sampled 076, Organ 021, WaveEdit Harmonio, WaveEdit Grav_c9, Consonant 037, WaveEdit Sine_a02, WaveEdit High_fre, WaveEdit Tidyb024, AKWF hvoice-01, WaveEdit Sohler58, WaveEdit Ppg_wa29, Vowel Bass 036, WaveEdit Sohler19, WaveEdit Sohler53, WaveEdit Sohler94, Glass 023, Chord 031, WaveEdit Access_v, Bowed 079, AKWF c604-01, WaveEdit Sohler56, WaveEdit Tidyb017, WaveEdit Sohler11, Overtone 018, Consonant 032, Reed 034, WaveEdit Mk_dwg_h, WaveEdit Grav_c3, WaveEdit Fracta01, WaveEdit Synlp54, WaveEdit Tidyb062, WaveEdit Envelo01, Vowel Tenor 005, WaveEdit Tidyb004, Chord 008, AKWF bitreduced-01, AKWF bw-saw-01, Overtone 053, WaveEdit Grav_a6, WaveEdit Sohler26, Sampled 066, WaveEdit Sohler86, Tube 036, Otmorph 014, WaveEdit Sohler76, WaveEdit Sohler27, Choir 030, WaveEdit Bank_410, WaveEdit Tidyb018, WaveEdit Alpha_2, WaveEdit Tidyb003, WaveEdit Sohler35, WaveEdit Lfo_play, WaveEdit Ppg_wa01, WaveEdit Ppg_wa02, WaveEdit Prophe00, Vowel Tenor 011, Tube 072, WaveEdit

		Tidyb058, Consonant 137, WaveEdit Sohler31, Consonant 076, WaveEdit Just_ran, Consonant 080, WaveEdit Grav_a5, WaveEdit Sohler14, Resonator 020, WaveEdit Grav_a1, Glass 020, WaveEdit Sohler97, Chord 028, WaveEdit Grav_a2, Vowel Bass 034, WaveEdit Sohler70, Breath 031, AKWF oscchip-03, WaveEdit Sohler84, Consonant 149, WaveEdit Tidyb041, Consonant 023, Otmorph 126, Bowed 054, WaveEdit Mixed_as, Otmorph 084, WaveEdit Twist31, WaveEdit Spectr05, WaveEdit Sohler92, WaveEdit Isobelle, Chord 021, Consonant 067, WaveEdit Envelope, Sub 003, WaveEdit Sohler79, Tube 002, Consonant 008, WaveEdit Ppg_wa03, Pluck 028, Vowel Alto 012, AKWF epiano-01, AKWF bw-squ-02, Organ 005, WaveEdit Sine2saw, Vowel Alto 039, Glass 004, WaveEdit Sohler43, Sampled 109, Vowel Alto 003, Glass 010, AKWF clarinett-01, WaveEdit Sohler18, Sampled 170, Tube 046, Vowel Tenor 017, WaveEdit Foldfeed, Tube 008, AKWF 0015-01, Otmorph 106, Overtone 037, Consonant 022, Breath 019, WaveEdit Ppg_wa07, Sampled 164, WaveEdit Sine_mut, Vowel Alto 007, Sampled 211, Metal 025, Glass 007, Vowel Soprano 011, Glass 024, AKWF 0008-01, Vowel Soprano 033, Shimmer 002, Pure 015, WaveEdit Geometri, Sampled 203, Chord 007, Vowel Soprano 005, AKWF altosax-01, Vowel Soprano 015, WaveEdit Ppg_wa17, Overtone 010, WaveEdit Synlp159, Sampled 115, WaveEdit Ppg_wa22, Otmorph 112, Vowel Alto 016, Breath 033, Tube 009, Tube 079, Sampled 097, Chord 023, Stack 008, AKWF 0003-01, Glass 038, Metal 016	
Position	`pad.position`	0 .. 1	0.3
Position Env	`pad.pos_env`	-1 .. 1	0
Position Decay	`pad.pos_decay`	10 .. 8000 ms	1500 ms
Position LFO	`pad.pos_lfo_depth`	0 .. 0.5	0.15
LFO Period	`pad.pos_lfo_beats`	0.25 .. 64 beats	16 beats
Cutoff	`pad.cutoff`	200 .. 18000 Hz	2200 Hz
Resonance	`pad.resonance`	0 .. 1	0.1
Env Amount	`pad.env_amount`	0 .. 6 oct	0.5 oct
Filter Decay	`pad.filter_decay`	5 .. 3000 ms	2000 ms
Key Track	`pad.key_track`	0 .. 1	0.5
HP Floor	`pad.hp_floor`	40 .. 400 Hz	200 Hz
HP Track	`pad.hp_track`	0 .. 1 x f0	0.6 x f0
Attack	`pad.amp_attack`	0.3 .. 2000 ms	800 ms
Decay	`pad.amp_decay`	5 .. 4000 ms	2000 ms
Sustain	`pad.amp_sustain`	0 .. 1	0.9
Release	`pad.amp_release`	5 .. 4000 ms	1500 ms
Width	`pad.width`	0 .. 1	1
Velocity	`pad.vel_sens`	0 .. 1	0.4
Delay Send	`pad.delay_send`	0 .. 1	0
Delay Left	`pad.delay_left`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/16

Delay Right	`pad.delay_right`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	1/4
Delay Feedback	`pad.delay_feedback`	0 .. 0.9	0.4
Delay High Pass	`pad.delay_high_pass`	150 .. 2000 Hz	350 Hz
Delay Low Pass	`pad.delay_low_pass`	800 .. 16000 Hz	6000 Hz
Room Send	`pad.room_send`	0 .. 1	0
Hall Send	`pad.hall_send`	0 .. 1	0.45
Duck	`pad.duck`	0 .. 18 dB	4 dB
Trance Gate	`pad.gate`	off / on	off
Gate Pattern	`pad.gate_pattern`	Sixteenths, Eighths, Rolling, Gallop, 3-3-2, Triplets, Trance 1, Trance 2, Trance 3	Trance 1
Gate Depth	`pad.gate_depth`	0 .. 1	0.85
Gate Duty	`pad.gate_duty`	0.05 .. 1	0.5
Gate Attack	`pad.gate_attack`	0.5 .. 60 ms	3 ms
Gate Release	`pad.gate_release`	0.5 .. 120 ms	12 ms
Gate Tone	`pad.gate_tone`	0 .. 1	0.4
Level	`pad.level`	-36 .. 6 dB	-17 dB
Disperse	`pad.disperse`	0 .. 8 x	0 x
Disperse Freq	`pad.disperse_freq`	200 .. 8000 Hz	1250 Hz
Drift	`pad.drift`	0 .. 8 ct	1 ct
Filter Type	`pad.filter_type`	Low Pass, Band Pass, High Pass, Notch	Low Pass
Glide	`pad.glide`	0 .. 400 ms	0 ms
Pan	`pad.pan`	-1 .. 1	0
Oscillator 2	`pad.osc2`	Off, Supersaw, VA, FM, Wavetable	Off
Osc 2 Mix	`pad.osc2_mix`	0 .. 1	0
Osc 2 Interval	`pad.osc2_interval`	-2 Oct, -1 Oct, -5th, Unison, +5th, +1 Oct	-1 Oct
Osc 2 Detune	`pad.osc2_detune`	-50 .. 50 ct	0 ct
Voice LFO	`pad.lfo_beats`	0.25 .. 64 beats	16 beats
LFO to Cutoff	`pad.lfo_cutoff`	0 .. 4 oct	0.3 oct
LFO to Pitch	`pad.lfo_pitch`	0 .. 50 ct	0 ct

LFO to Level	`pad.lfo_amp`	0 .. 1	0
Plate Send	`pad.plate_send`	0 .. 1	0.1
Slow Movement	`pad.slow_mod`	0 .. 1	0
Filter Model	`pad.filter_model`	State Variable, Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder, Korg35 (MS-20), Polivoks, Wasp	State Variable
Filter Mode	`pad.filter_mode`	0 .. 1	0
Filter Attack	`pad.filt_attack`	0.1 .. 4000 ms	0.1 ms
Filter Sustain	`pad.filt_sustain`	0 .. 1	0
Filter Release	`pad.filt_release`	5 .. 8000 ms	300 ms
Mod Attack	`pad.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`pad.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`pad.menv_sustain`	0 .. 1	0
Mod Release	`pad.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`pad.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`pad.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`pad.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`pad.lfo1_retrig`	off / on	off
LFO 1 Fade	`pad.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`pad.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`pad.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`pad.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`pad.lfo2_retrig`	off / on	off
LFO 2 Fade	`pad.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`pad.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`pad.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine

LFO 3 Sync	`pad.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`pad.lfo3_retrig`	off / on	off
LFO 3 Fade	`pad.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`pad.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`pad.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`pad.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`pad.lfo4_retrig`	off / on	off
LFO 4 Fade	`pad.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`pad.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`pad.mx1_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 1 Amount	`pad.mx1_amount`	-1 .. 1	0
Mod 2 Source	`pad.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`pad.mx2_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 2 Amount	`pad.mx2_amount`	-1 .. 1	0
Mod 3 Source	`pad.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`pad.mx3_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 3 Amount	`pad.mx3_amount`	-1 .. 1	0
Mod 4 Source	`pad.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`pad.mx4_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 4 Amount	`pad.mx4_amount`	-1 .. 1	0
Mod 5 Source	`pad.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`pad.mx5_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 5 Amount	`pad.mx5_amount`	-1 .. 1	0

Mod 6 Source	`pad.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`pad.mx6_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 6 Amount	`pad.mx6_amount`	-1 .. 1	0
Mod 7 Source	`pad.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`pad.mx7_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 7 Amount	`pad.mx7_amount`	-1 .. 1	0
Mod 8 Source	`pad.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`pad.mx8_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 8 Amount	`pad.mx8_amount`	-1 .. 1	0

STAB

Control	Key	Range	Default
Oscillator	`stab.osc`	Supersaw, VA, FM, Wavetable	Supersaw
Detune	`stab.detune`	0 .. 1	0.4
Mix	`stab.mix`	0 .. 1	0.7
Dynamic Detune	`stab.dynamic_detune`	0 .. 1	0.7
Wave	`stab.wave`	0 .. 1	0
Pulse Width	`stab.pulse_width`	0.05 .. 0.95	0.5
FM Ratio	`stab.fm_ratio`	0.5 .. 8	2
FM Index	`stab.fm_index`	0 .. 10	2.5
FM Decay	`stab.fm_decay`	5 .. 2000 ms	250 ms
Table	`stab.table`	Classic, Vocal, Glass, PWM, Sync, Formant Saw, WaveEdit Hienharm, WaveEdit Junox_ho, WaveEdit Euclidea, WaveEdit Sohler49, WaveEdit Vocal_fo, WaveEdit Pwn_saw, WaveEdit Tidyb030, WaveEdit I_heart, WaveEdit Sine_n, WaveEdit Vocal_00, WaveEdit Supersaw, WaveEdit Tidyb060, Consonant 024, WaveEdit Synlp92, WaveEdit Distorte, WaveEdit Fourier2, WaveEdit Grav_b8, WaveEdit Spectr01, WaveEdit Discorda, WaveEdit Sohler47, WaveEdit Ppg_wa27, WaveEdit Micro_q, WaveEdit Noise_wa, WaveEdit Kuato, WaveEdit Synlp67, WaveEdit Komple01, Consonant 066, WaveEdit Iterat00, WaveEdit Retro_sp, WaveEdit Acid_rin, WaveEdit Meravigl, WaveEdit Tidyb066, WaveEdit Tidyb049, WaveEdit Fracta03, WaveEdit Chebyshe, Sampled 167, WaveEdit Wavetabl, Chord 004, WaveEdit Grav_b6, WaveEdit Sohler33, WaveEdit Ppg_wa13, WaveEdit Pd104, WaveEdit Sohler48, WaveEdit Ppg_wa28, WaveEdit Wavetrip, WaveEdit Cz_ish, WaveEdit Fx_bitno, WaveEdit Tidyb046, WaveEdit Sohler74, WaveEdit Sohler29, WaveEdit Enshtu02, WaveEdit Tidyb072, WaveEdit	Vocal

Tidyb050, WaveEdit Voice_a, Resonator 018, WaveEdit Tidyb035, WaveEdit Tezzalog, AKWF 0004-hollow-01, WaveEdit Lom_a, WaveEdit Tidyb064, WaveEdit Moddrop, WaveEdit Harmomet, Hollow 013, WaveEdit Tidyb065, WaveEdit Ultra_ch, WaveEdit Laser_cr, WaveEdit Ppg_wa05, WaveEdit Drone, WaveEdit Gentle_m, WaveEdit Tidyb067, WaveEdit Tidyb005, Resonator 008, WaveEdit Synlp71, WaveEdit Sohler46, WaveEdit Tidyb077, WaveEdit Tidyb027, WaveEdit Sand_eye, WaveEdit Feedback, WaveEdit Tidyb071, WaveEdit Snake_ey, WaveEdit Hyperbol, AKWF 0018-hollow-01, Overtone 064, WaveEdit Light_00, WaveEdit Crush_ad, Organ 034, Sampled 131, Glass 012, WaveEdit Sohler67, Organ 006, WaveEdit Ppg_wa14, WaveEdit Sq8_sh, AKWF clavinet-hollow-01, Glass 009, WaveEdit Grav_c7, Consonant 100, WaveEdit Sohler51, Vowel Bass 015, Sampled 227, Hollow 005, Sampled 065, AKWF oscchip-04, AKWF raw-01, Hollow 015, AKWF snippets-01, Chord 027, Consonant 071, Chord 020, Consonant 051, WaveEdit Cyborg, Sampled 238, AKWF 0014-hollow-01, Overtone 000, WaveEdit Ppg_wa15, WaveEdit Grav_b4, Consonant 009, WaveEdit Grav_c5, WaveEdit Twist6, Glass 027, Sampled 078, AKWF oscchip-05, Consonant 120, WaveEdit Ppg_wa04, WaveEdit Sohler59, Sampled 081, Otmorph 053, Chord 030, Chord 032, Organ 029, Overtone 108, Hollow 001, WaveEdit Ppg_wa10, WaveEdit Organ_di, AKWF 0009-hollow-01, Tube 042, Vowel Bass 008, Organ 035, Metal 001, Consonant 114, AKWF vgame-03, Sampled 224, Resonator 001, Vowel Bass 038, Sampled 058, Vowel Tenor 038, Glass 026, Chord 019, Otmorph 115, AKWF stereo-04, Consonant 105, Vowel Bass 026, Chord 017, WaveEdit Ppg_wa11, Consonant 109, Sampled 125, Consonant 012, Overtone 046, Glass 016, Otmorph 067, Organ 026, Otmorph 005, Glass 018, Consonant 018, Hollow 023, Overtone 019, Otmorph 070, Consonant 127, Vowel Bass 029, Organ 016, Vowel Bass 017, Sampled 209, Sampled 130, Overtone 038, WaveEdit Reso_ana, Consonant 142, WaveEdit Reso_p00, Chord 009, AKWF distorted-01, Sampled 162, Glass 006, Metal 003, WaveEdit Square_p, Sampled 059, Organ 030, Sampled 003, Consonant 036, Chord 034, Sampled 193, WaveEdit Qux_fmy, Vowel Bass 023, Otmorph 133, WaveEdit Sohler52, Vowel Bass 007, WaveEdit Grav_b3, Consonant 025, Consonant 146, Chord 018, Overtone 047, Chord 038, Sampled 127, Metal 009, Organ 014, Consonant 033, Vowel Bass 035, Consonant 001, WaveEdit Iterativ, Consonant 129, Tube 066, Organ 025, Vowel Tenor 012, Chord 039, Sampled 106, Sampled 207, Breath 013, WaveEdit Grav_c2, Consonant 079, Otmorph 119, Consonant 064, WaveEdit Ppg_wa18, WaveEdit Pd103, Overtone 033, Chord 013, Vowel Bass 014, Sampled 226, Chord 011, Sampled 048, Vowel Tenor 037, Otmorph 095, Organ 012, Vowel Tenor 019, Overtone 015, Overtone 054, Consonant 088, Consonant 108, Sampled 197, Organ 037, Choir 004, Vowel Bass 030, Resonator 019, Otmorph 086, Tube 074, Tube 089, Sampled 182, Organ 038, Sampled 173, Consonant 060, Otmorph 030, Sampled 138, Consonant 056, Otmorph 132, Otmorph 138, Glass 003, Vowel Bass 021, Vowel Tenor 036, Organ 033, Sampled 214, Consonant 081, Consonant 094, Consonant 028, Consonant 003, Vowel Soprano 035, Consonant 126, Vowel Bass 027, Chord 000, Resonator 010, Choir 026, Metal 015, AKWF 0018-02, Consonant 046, Otmorph 079, Vowel Tenor 024, Consonant 117, Choir 025, Overtone 067, Chord 016, Otmorph 109, Vowel Alto 001, Otmorph 089, Consonant 077, Shimmer 033, Otmorph 022, Consonant 144, Organ 000, Consonant 139, Consonant 106, Vowel Bass 039, Otmorph 043, Vowel Tenor 033, Resonator 012, Otmorph 059, Otmorph 073, Sampled 093, Overtone 055, Sampled 189, Otmorph 068, Otmorph 064, Breath 029, Chord 033, Sampled 108, Consonant 030, Bowed 075, Organ 011, Vowel Tenor 006, Otmorph 056, AKWF 0006-02, Glass 037, Vowel Bass 001, WaveEdit Tidyb026, WaveEdit Sohler39, Sampled 076, Organ 021, WaveEdit Harmonio, WaveEdit Grav_c9, Consonant 037, WaveEdit Sine_a02, WaveEdit High_fre, WaveEdit Tidyb024,

		AKWF hvoice-01, WaveEdit Sohler58, WaveEdit Ppg_wa29, Vowel Bass 036, WaveEdit Sohler19, WaveEdit Sohler53, WaveEdit Sohler94, Glass 023, Chord 031, WaveEdit Access_v, Bowed 079, AKWF c604-01, WaveEdit Sohler56, WaveEdit Tidyb017, WaveEdit Sohler11, Overtone 018, Consonant 032, Reed 034, WaveEdit Mk_dwg_h, WaveEdit Grav_c3, WaveEdit Fracta01, WaveEdit Synlp54, WaveEdit Tidyb062, WaveEdit Envelo01, Vowel Tenor 005, WaveEdit Tidyb004, Chord 008, AKWF bitreduced-01, AKWF bw-saw-01, Overtone 053, WaveEdit Grav_a6, WaveEdit Sohler26, Sampled 066, WaveEdit Sohler86, Tube 036, Otmorph 014, WaveEdit Sohler76, WaveEdit Sohler27, Choir 030, WaveEdit Bank_410, WaveEdit Tidyb018, WaveEdit Alpha_2, WaveEdit Tidyb003, WaveEdit Sohler35, WaveEdit Lfo_play, WaveEdit Ppg_wa01, WaveEdit Ppg_wa02, WaveEdit Prophe00, Vowel Tenor 011, Tube 072, WaveEdit Tidyb058, Consonant 137, WaveEdit Sohler31, Consonant 076, WaveEdit Just_ran, Consonant 080, WaveEdit Grav_a5, WaveEdit Sohler14, Resonator 020, WaveEdit Grav_a1, Glass 020, WaveEdit Sohler97, Chord 028, WaveEdit Grav_a2, Vowel Bass 034, WaveEdit Sohler70, Breath 031, AKWF oscchip-03, WaveEdit Sohler84, Consonant 149, WaveEdit Tidyb041, Consonant 023, Otmorph 126, Bowed 054, WaveEdit Mixed_as, Otmorph 084, WaveEdit Twist31, WaveEdit Spectr05, WaveEdit Sohler92, WaveEdit Isobelle, Chord 021, Consonant 067, WaveEdit Envelope, Sub 003, WaveEdit Sohler79, Tube 002, Consonant 008, WaveEdit Ppg_wa03, Pluck 028, Vowel Alto 012, AKWF epiano-01, AKWF bw-squ-02, Organ 005, WaveEdit Sine2saw, Vowel Alto 039, Glass 004, WaveEdit Sohler43, Sampled 109, Vowel Alto 003, Glass 010, AKWF clarinett-01, WaveEdit Sohler18, Sampled 170, Tube 046, Vowel Tenor 017, WaveEdit Foldfeed, Tube 008, AKWF 0015-01, Otmorph 106, Overtone 037, Consonant 022, Breath 019, WaveEdit Ppg_wa07, Sampled 164, WaveEdit Sine_mut, Vowel Alto 007, Sampled 211, Metal 025, Glass 007, Vowel Soprano 011, Glass 024, AKWF 0008-01, Vowel Soprano 033, Shimmer 002, Pure 015, WaveEdit Geometri, Sampled 203, Chord 007, Vowel Soprano 005, AKWF altosax-01, Vowel Soprano 015, WaveEdit Ppg_wa17, Overtone 010, WaveEdit Synlp159, Sampled 115, WaveEdit Ppg_wa22, Otmorph 112, Vowel Alto 016, Breath 033, Tube 009, Tube 079, Sampled 097, Chord 023, Stack 008, AKWF 0003-01, Glass 038, Metal 016	
Position	`stab.position`	0 .. 1	0.3
Position Env	`stab.pos_env`	-1 .. 1	0
Position Decay	`stab.pos_decay`	10 .. 8000 ms	1500 ms
Position LFO	`stab.pos_lfo_depth`	0 .. 0.5	0.15
LFO Period	`stab.pos_lfo_beats`	0.25 .. 64 beats	16 beats
Cutoff	`stab.cutoff`	200 .. 18000 Hz	3500 Hz
Resonance	`stab.resonance`	0 .. 1	0.15
Env Amount	`stab.env_amount`	0 .. 6 oct	2 oct
Filter Decay	`stab.filter_decay`	5 .. 3000 ms	200 ms
Key Track	`stab.key_track`	0 .. 1	0.5
HP Floor	`stab.hp_floor`	40 .. 400 Hz	250 Hz
HP Track	`stab.hp_track`	0 .. 1 x f0	1 x f0
Attack	`stab.amp_attack`	0.3 .. 2000 ms	1 ms

Decay	`stab.amp_decay`	5 .. 4000 ms	180 ms
Sustain	`stab.amp_sustain`	0 .. 1	0
Release	`stab.amp_release`	5 .. 4000 ms	120 ms
Width	`stab.width`	0 .. 1	0.8
Velocity	`stab.vel_sens`	0 .. 1	0.4
Delay Send	`stab.delay_send`	0 .. 1	0.15
Delay Left	`stab.delay_left`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/16
Delay Right	`stab.delay_right`	1/16, 1/8, 3/16, 1/4, 3/8, 1/2	3/8
Delay Feedback	`stab.delay_feedback`	0 .. 0.9	0.4
Delay High Pass	`stab.delay_high_pass`	150 .. 2000 Hz	350 Hz
Delay Low Pass	`stab.delay_low_pass`	800 .. 16000 Hz	6000 Hz
Room Send	`stab.room_send`	0 .. 1	0.1
Hall Send	`stab.hall_send`	0 .. 1	0.25
Duck	`stab.duck`	0 .. 18 dB	3 dB
Trance Gate	`stab.gate`	off / on	off
Gate Pattern	`stab.gate_pattern`	Sixteenths, Eighths, Rolling, Gallop, 3-3-2, Triplets, Trance 1, Trance 2, Trance 3	Trance 1
Gate Depth	`stab.gate_depth`	0 .. 1	0.85
Gate Duty	`stab.gate_duty`	0.05 .. 1	0.5
Gate Attack	`stab.gate_attack`	0.5 .. 60 ms	3 ms
Gate Release	`stab.gate_release`	0.5 .. 120 ms	12 ms
Gate Tone	`stab.gate_tone`	0 .. 1	0.4
Level	`stab.level`	-36 .. 6 dB	-11 dB
Disperse	`stab.disperse`	0 .. 8 x	0 x
Disperse Freq	`stab.disperse_freq`	200 .. 8000 Hz	1250 Hz
Drift	`stab.drift`	0 .. 8 ct	1 ct
Filter Type	`stab.filter_type`	Low Pass, Band Pass, High Pass, Notch	Low Pass
Glide	`stab.glide`	0 .. 400 ms	0 ms
Pan	`stab.pan`	-1 .. 1	0
Oscillator 2	`stab.osc2`	Off, Supersaw, VA, FM, Wavetable	Off
Osc 2 Mix	`stab.osc2_mix`	0 .. 1	0


Osc 2 Interval	`stab.osc2_interval`	-2 Oct, -1 Oct, -5th, Unison, +5th, +1 Oct	-1 Oct
Osc 2 Detune	`stab.osc2_detune`	-50 .. 50 ct	0 ct
Voice LFO	`stab.lfo_beats`	0.25 .. 64 beats	8 beats
LFO to Cutoff	`stab.lfo_cutoff`	0 .. 4 oct	0 oct
LFO to Pitch	`stab.lfo_pitch`	0 .. 50 ct	0 ct
LFO to Level	`stab.lfo_amp`	0 .. 1	0
Plate Send	`stab.plate_send`	0 .. 1	0.15
Slow Movement	`stab.slow_mod`	0 .. 1	0
Filter Model	`stab.filter_model`	State Variable, Moog Ladder, Prophet (SSM2040), Juno (IR3109), Oberheim SEM, Xpander, Diode Ladder, Korg35 (MS-20), Polivoks, Wasp	State Variable
Filter Mode	`stab.filter_mode`	0 .. 1	0
Filter Attack	`stab.filt_attack`	0.1 .. 4000 ms	0.1 ms
Filter Sustain	`stab.filt_sustain`	0 .. 1	0
Filter Release	`stab.filt_release`	5 .. 8000 ms	300 ms
Mod Attack	`stab.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`stab.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`stab.menv_sustain`	0 .. 1	0
Mod Release	`stab.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`stab.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`stab.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`stab.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`stab.lfo1_retrig`	off / on	off
LFO 1 Fade	`stab.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`stab.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`stab.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine


LFO 2 Sync	`stab.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`stab.lfo2_retrig`	off / on	off
LFO 2 Fade	`stab.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`stab.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`stab.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`stab.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`stab.lfo3_retrig`	off / on	off
LFO 3 Fade	`stab.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`stab.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`stab.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`stab.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`stab.lfo4_retrig`	off / on	off
LFO 4 Fade	`stab.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`stab.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`stab.mx1_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 1 Amount	`stab.mx1_amount`	-1 .. 1	0
Mod 2 Source	`stab.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`stab.mx2_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 2 Amount	`stab.mx2_amount`	-1 .. 1	0
Mod 3 Source	`stab.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`stab.mx3_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 3 Amount	`stab.mx3_amount`	-1 .. 1	0
Mod 4 Source	`stab.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 4 Target	`stab.mx4_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 4 Amount	`stab.mx4_amount`	-1 .. 1	0
Mod 5 Source	`stab.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`stab.mx5_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 5 Amount	`stab.mx5_amount`	-1 .. 1	0
Mod 6 Source	`stab.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`stab.mx6_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 6 Amount	`stab.mx6_amount`	-1 .. 1	0
Mod 7 Source	`stab.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`stab.mx7_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 7 Amount	`stab.mx7_amount`	-1 .. 1	0
Mod 8 Source	`stab.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`stab.mx8_dst`	Off, Pitch, Osc 2 Pitch, Pulse Width, Table Position, FM Index, Cutoff, Resonance, Filter Mode, Level, Pan, Detune	Off
Mod 8 Amount	`stab.mx8_amount`	-1 .. 1	0

Keys


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Piano
Cloud
PIANO PRESET
Brilliant Lauds
this track: Brilliant Lauds (Muted Mellow)
INSTRUMENT
Instrument
Baby Grand
Hardness
0.70
Strike Point
0.28
Unison Width
1.21 ct
Inharmonicity
1.13
Impedance
0.55
Stretch
1.13
Condition
0.39 ct
PLAYING
Level
-8.10 dB
Pedal
0.00
Sympathetic
1.00
Phantom
1.00
Damper Noise
0.30
Mechanics
0.30
OUT
Width
0.70
Low Cut
80.0 Hz
Duck
2.00 dB
Room Send
0.05
Plate Send
0.10
Hall Send
0.35
MOD ENVELOPE
Mod Attack
10.0 ms
Mod Decay
800 ms
Mod Sustain
0.00
Mod Release
400 ms
LFO 1
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 2
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 3
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
LFO 4
Rate
1.00 Hz
Shape
Sine
Sync
Free
Retrig
Fade
0.00 s
MATRIX 1-2
Mod 1 Source
Off
Mod 1 Target
Off
Mod 1 Amount
0.00
Mod 2 Source
Off
Mod 2 Target
Off
Mod 2 Amount
0.00
MATRIX 3-4
Mod 3 Source
Off
Mod 3 Target
Off
Mod 3 Amount
0.00
Mod 4 Source
Off
Mod 4 Target
Off
Mod 4 Amount
0.00
MATRIX 5-6
Mod 5 Source
Off
Mod 5 Target
Off
Mod 5 Amount
0.00
Mod 6 Source
Off
Mod 6 Target
Off
Mod 6 Amount
0.00
MATRIX 7-8
Mod 7 Source
Off
Mod 7 Target
Off
Mod 7 Amount
0.00
Mod 8 Source
Off
Mod 8 Target
Off
Mod 8 Amount
0.00
Point at a control: what it is and what it does is told here.

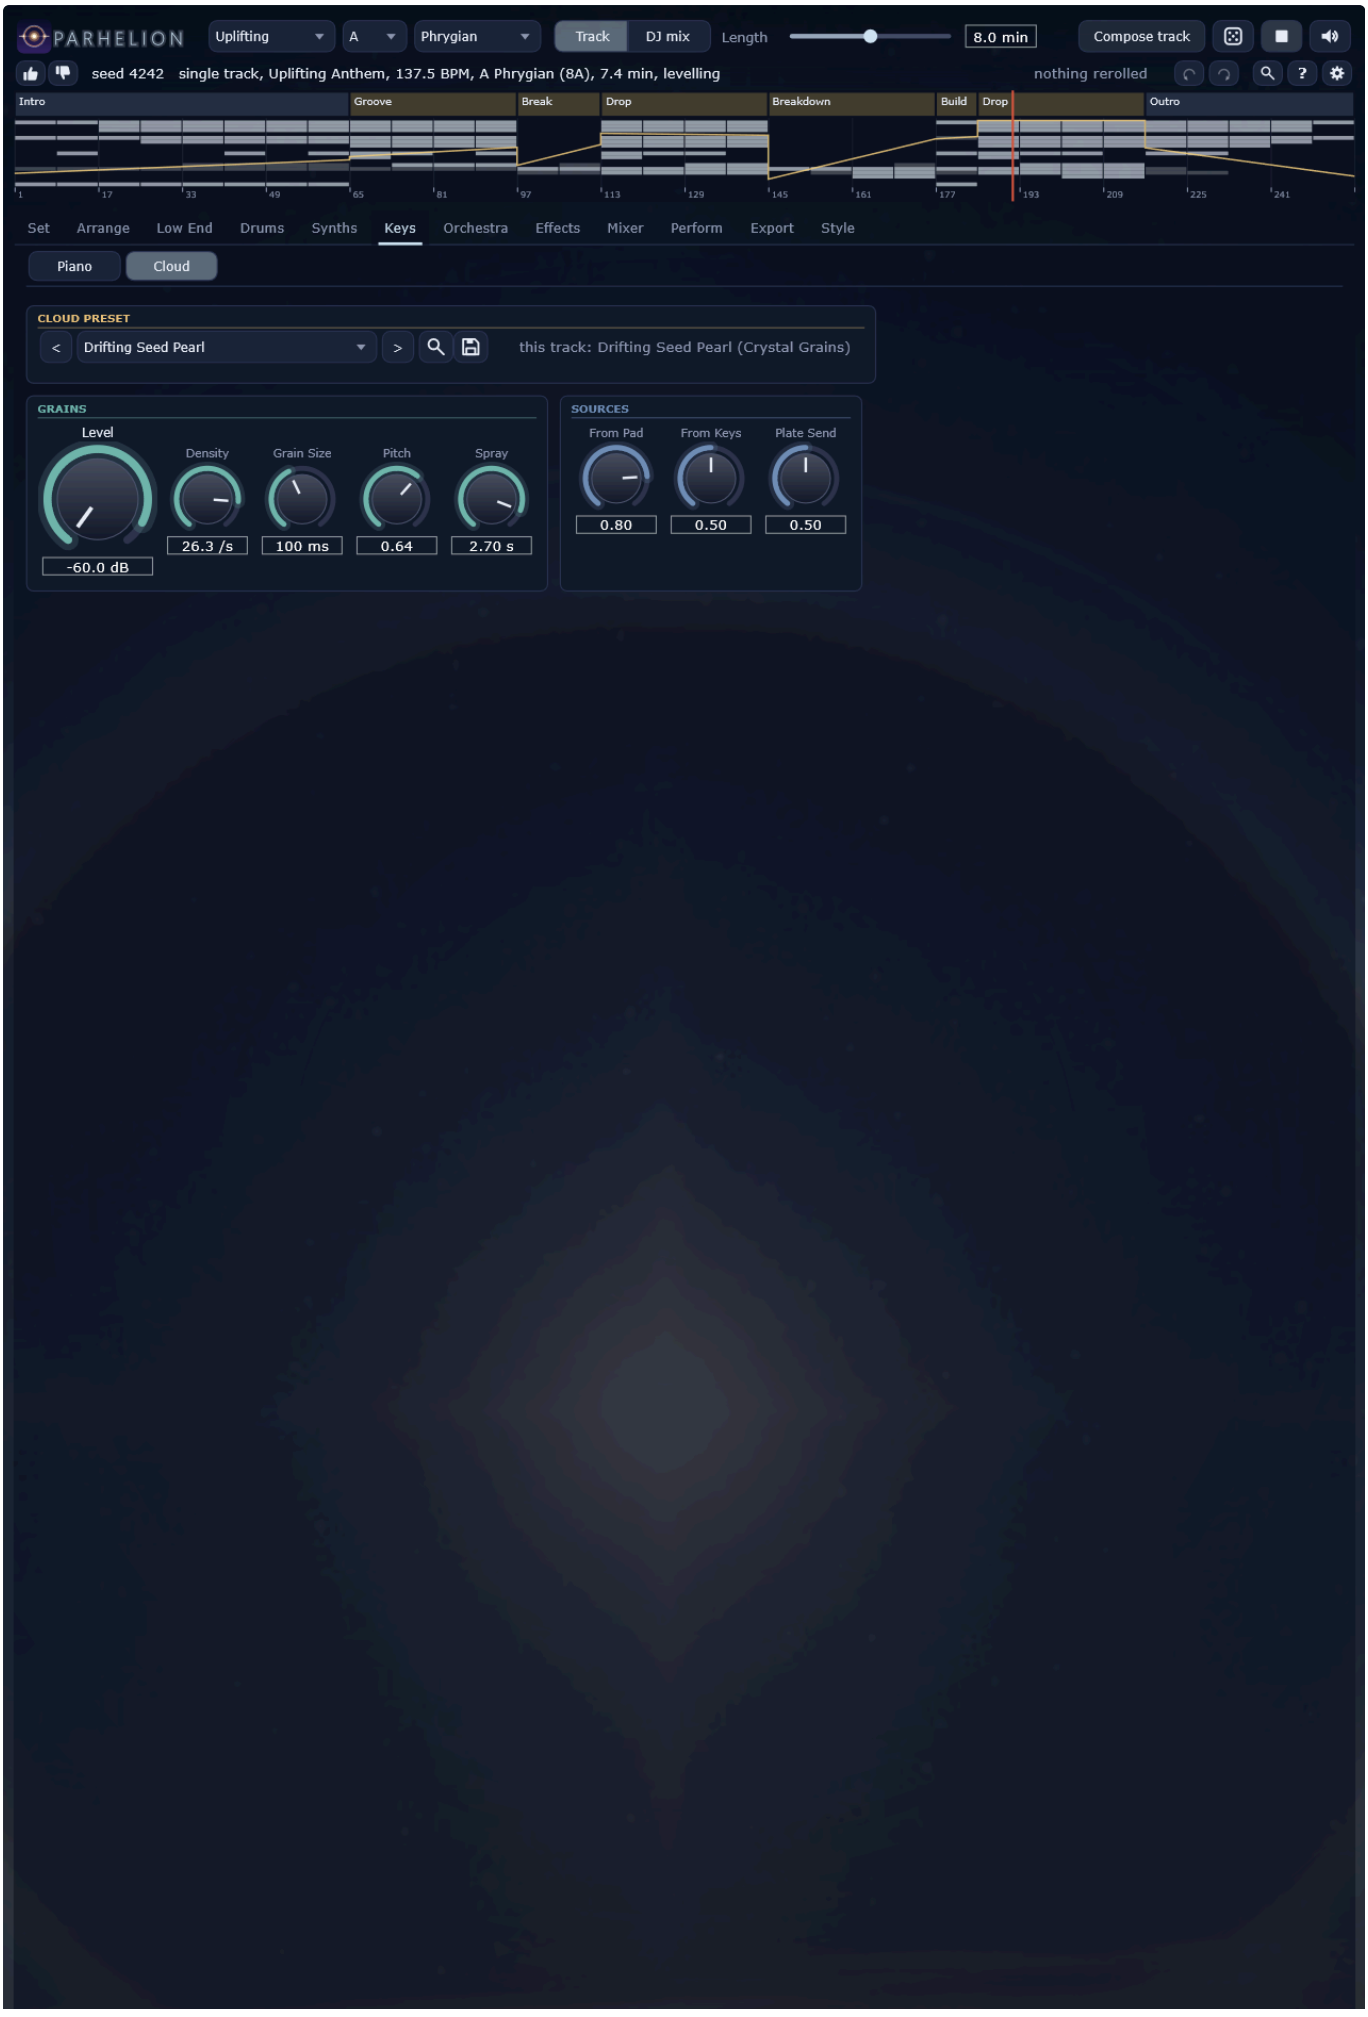
PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
1
17
33
49
65
81
97
113
129
145
161
177
193
209
225
241
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Piano
Cloud
CLOUD PRESET
<
Drifting Seed Pearl
>
this track: Drifting Seed Pearl (Crystal Grains)
GRAINS
Level
Density
Grain Size
Pitch
Spray
-60.0 dB
26.3 /s
100 ms
0.64
2.70 s
SOURCES
From Pad
From Keys
Plate Send
0.80
0.50
0.50

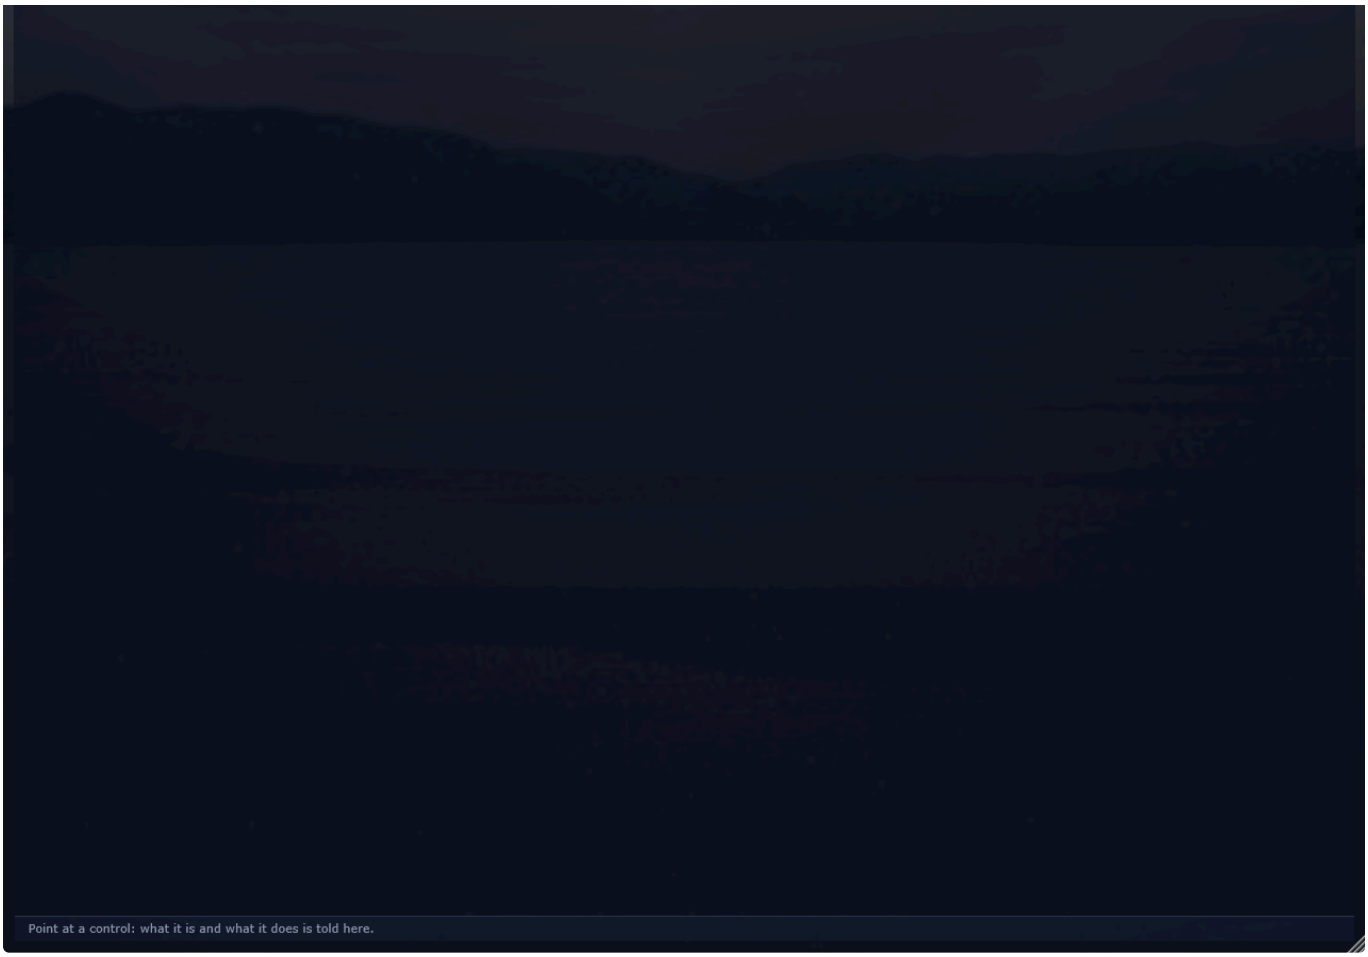

Keys: the grain cloud.

The piano is a physical model, not a sample: for every key a string of the length, tension and stiffness of a real instrument (four of them: Grand, Baby Grand, Upright and Soft, the slightly muffled piano of Dream House), one to three strings per note, a felt hammer, a soundboard solved as a ribbed orthotropic plate, the damper, the pedal and the sympathetic strings. Its stretched tuning comes from the strings' stiffness. Its voicing was set note by note against a concert grand (Pianoteq's Steinway D): the level over the keyboard and the velocity, how bright a note is and how much brighter a harder blow makes it, the two stages of its decay, the action's knock and the body in the first moments, how fast the damper takes a note away. In Dream House it plays the motif, the pedal down and lifted at every chord change.

The grain cloud hears the pad, the pluck and the piano and scatters them in grains into the plate -- Deep's haze and Dream House's breath.

PIANO

Control	Key	Range	Default
Instrument	`piano.instrument`	Grand, Baby Grand, Upright, Soft	Grand
Hardness	`piano.hardness`	0.25 .. 4	1
Strike Point	`piano.strike`	-1 .. 1	0
Unison Width	`piano.unison`	0 .. 6 ct	1 ct
Inharmonicity	`piano.inharm`	0.25 .. 3	1
Impedance	`piano.impedance`	0.3 .. 3	1
Stretch	`piano.stretch`	0 .. 2	1

Condition	`piano.condition`	0 .. 3 ct	0.3 ct
Level	`piano.level`	-36 .. 6 dB	-6 dB
Pedal	`piano.pedal`	0 .. 1	0
Sympathetic	`piano.sympathetic`	0 .. 2	1
Phantom	`piano.phantom`	0 .. 3	1
Damper Noise	`piano.damper_noise`	0 .. 1	0.3
Mechanics	`piano.mechanics`	0 .. 1	0.3
Width	`piano.width`	0 .. 1	0.7
Low Cut	`piano.low_cut`	20 .. 400 Hz	80 Hz
Duck	`piano.duck`	0 .. 18 dB	2 dB
Room Send	`piano.room_send`	0 .. 1	0.05
Plate Send	`piano.plate_send`	0 .. 1	0.1
Hall Send	`piano.hall_send`	0 .. 1	0.35
Mod Attack	`piano.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`piano.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`piano.menv_sustain`	0 .. 1	0
Mod Release	`piano.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`piano.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`piano.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`piano.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`piano.lfo1_retrig`	off / on	off
LFO 1 Fade	`piano.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`piano.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`piano.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`piano.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`piano.lfo2_retrig`	off / on	off
LFO 2 Fade	`piano.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`piano.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`piano.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`piano.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`piano.lfo3_retrig`	off / on	off
LFO 3 Fade	`piano.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`piano.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`piano.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`piano.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`piano.lfo4_retrig`	off / on	off
LFO 4 Fade	`piano.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`piano.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`piano.mx1_dst`	Off, Pitch, Hardness, Level, Pan	Off

Mod 1 Amount	`piano.mx1_amount`	-1 .. 1	0
Mod 2 Source	`piano.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`piano.mx2_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 2 Amount	`piano.mx2_amount`	-1 .. 1	0
Mod 3 Source	`piano.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`piano.mx3_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 3 Amount	`piano.mx3_amount`	-1 .. 1	0
Mod 4 Source	`piano.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`piano.mx4_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 4 Amount	`piano.mx4_amount`	-1 .. 1	0
Mod 5 Source	`piano.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`piano.mx5_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 5 Amount	`piano.mx5_amount`	-1 .. 1	0
Mod 6 Source	`piano.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`piano.mx6_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 6 Amount	`piano.mx6_amount`	-1 .. 1	0
Mod 7 Source	`piano.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`piano.mx7_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 7 Amount	`piano.mx7_amount`	-1 .. 1	0
Mod 8 Source	`piano.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`piano.mx8_dst`	Off, Pitch, Hardness, Level, Pan	Off
Mod 8 Amount	`piano.mx8_amount`	-1 .. 1	0

CLOUD


Control	Key	Range	Default
Level	`cloud.level`	-60 .. 6 dB	-60 dB
Density	`cloud.density`	0.5 .. 60 /s	10 /s
Grain Size	`cloud.size`	20 .. 1000 ms	260 ms
Pitch	`cloud.pitch`	0 .. 1	0.3

Spray	`cloud.spray`	0.05 .. 4.5 s	2.5 s
From Pad	`cloud.pad_send`	0 .. 1	0.8
From Keys	`cloud.keys_send`	0 .. 1	0.5
Plate Send	`cloud.plate_send`	0 .. 1	0.5

Orchestra



PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Strings
Choir
Brass
Timpani
STRINGS PRESET
Rich Viola Section
this track: Rich Viola Section (Epic Low Strings)
SECTION
Level
Players
Vibrato
-9.80 dB
6
1.03
BOW
Force
Position
Speed
Attack
Release
1.31
0.13
1.13
168 ms
208 ms
OUT
Width
Low Cut
Duck
Room Send
Plate Send
Hall Send
0.55
60.0 Hz
3.00 dB
0.05
0.10
0.45
MOD ENVELOPE
Mod Attack
Mod Decay
Mod Sustain
Mod Release
10.0 ms
800 ms
0.00
400 ms
LFO 1
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
LFO 2
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
LFO 3
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
LFO 4
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
MATRIX 1-2
Mod 1 Source
Mod 1 Target
Mod 1 Amount
Mod 2 Source
Mod 2 Target
Mod 2 Amount
Off
0.00
MATRIX 3-4
Mod 3 Source
Mod 3 Target
Mod 3 Amount
Mod 4 Source
Mod 4 Target
Mod 4 Amount
Off
0.00
MATRIX 5-6
Mod 5 Source
Mod 5 Target
Mod 5 Amount
Mod 6 Source
Mod 6 Target
Mod 6 Amount
Off
0.00
MATRIX 7-8
Mod 7 Source
Mod 7 Target
Mod 7 Amount
Mod 8 Source
Mod 8 Target
Mod 8 Amount
Off
0.00
Point at a control: what it is and what it does is told here.


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Strings
Choir
Brass
Timpani
CHOIR PRESET
Heavenly Anthem Choir
this track: Heavenly Anthem Choir (Aah Ensemble)
VOICES
Level
Singers
Vowel
Vibrato
Breath
Tension
-6.70 dB
6
0.02
0.81
0.24
0.60
ENVELOPE
Attack
Release
228 ms
699 ms
OUT
Width
Low Cut
Duck
Room Send
Plate Send
Hall Send
0.55
90.0 Hz
3.00 dB
0.00
0.10
0.55
MOD ENVELOPE
Mod Attack
Mod Decay
Mod Sustain
Mod Release
10.0 ms
800 ms
0.00
400 ms
LFO 1
LFO 2
LFO 3
LFO 4
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
MATRIX 1-2
MATRIX 3-4
MATRIX 5-6
MATRIX 7-8
Mod 1 Source
Mod 1 Target
Mod 1 Amount
Mod 2 Source
Mod 2 Target
Mod 2 Amount
Mod 3 Source
Mod 3 Target
Mod 3 Amount
Mod 4 Source
Mod 4 Target
Mod 4 Amount
Mod 5 Source
Mod 5 Target
Mod 5 Amount
Mod 6 Source
Mod 6 Target
Mod 6 Amount
Mod 7 Source
Mod 7 Target
Mod 7 Amount
Mod 8 Source
Mod 8 Target
Mod 8 Amount
Off
0.00

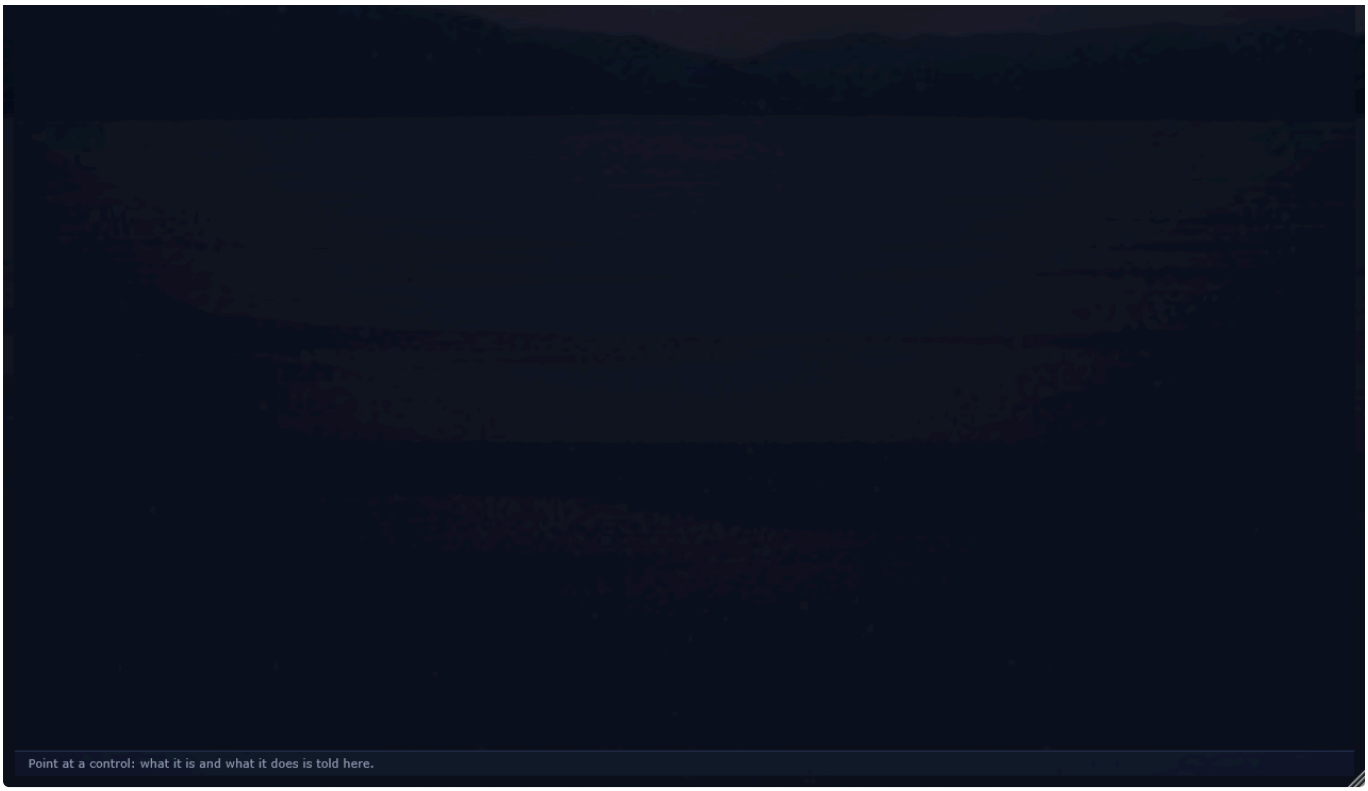


Orchestra: the choir.


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Strings
Choir
Brass
Timpani
BRASS PRESET
Brassy Burst Brass
this track: Brassy Burst Brass (Brass Stabs)
PLAYERS
Level
Players
Pressure
Brassiness
Vibrato
-11.5 dB
3
1.60
0.69
1.82 ct
ENVELOPE
Attack
Release
15.8 ms
73.1 ms
OUT
Width
Low Cut
Duck
Room Send
Plate Send
Hall Send
0.60
50.0 Hz
3.00 dB
0.05
0.10
0.45
MOD ENVELOPE
Mod Attack
Mod Decay
Mod Sustain
Mod Release
10.0 ms
800 ms
0.00
400 ms
LFO 1
LFO 2
LFO 3
LFO 4
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
MATRIX 1-2
MATRIX 3-4
MATRIX 5-6
MATRIX 7-8
Mod 1 Source
Mod 1 Target
Mod 1 Amount
Mod 2 Source
Mod 2 Target
Mod 2 Amount
Mod 3 Source
Mod 3 Target
Mod 3 Amount
Mod 4 Source
Mod 4 Target
Mod 4 Amount
Mod 5 Source
Mod 5 Target
Mod 5 Amount
Mod 6 Source
Mod 6 Target
Mod 6 Amount
Mod 7 Source
Mod 7 Target
Mod 7 Amount
Mod 8 Source
Mod 8 Target
Mod 8 Amount
Off
0.00

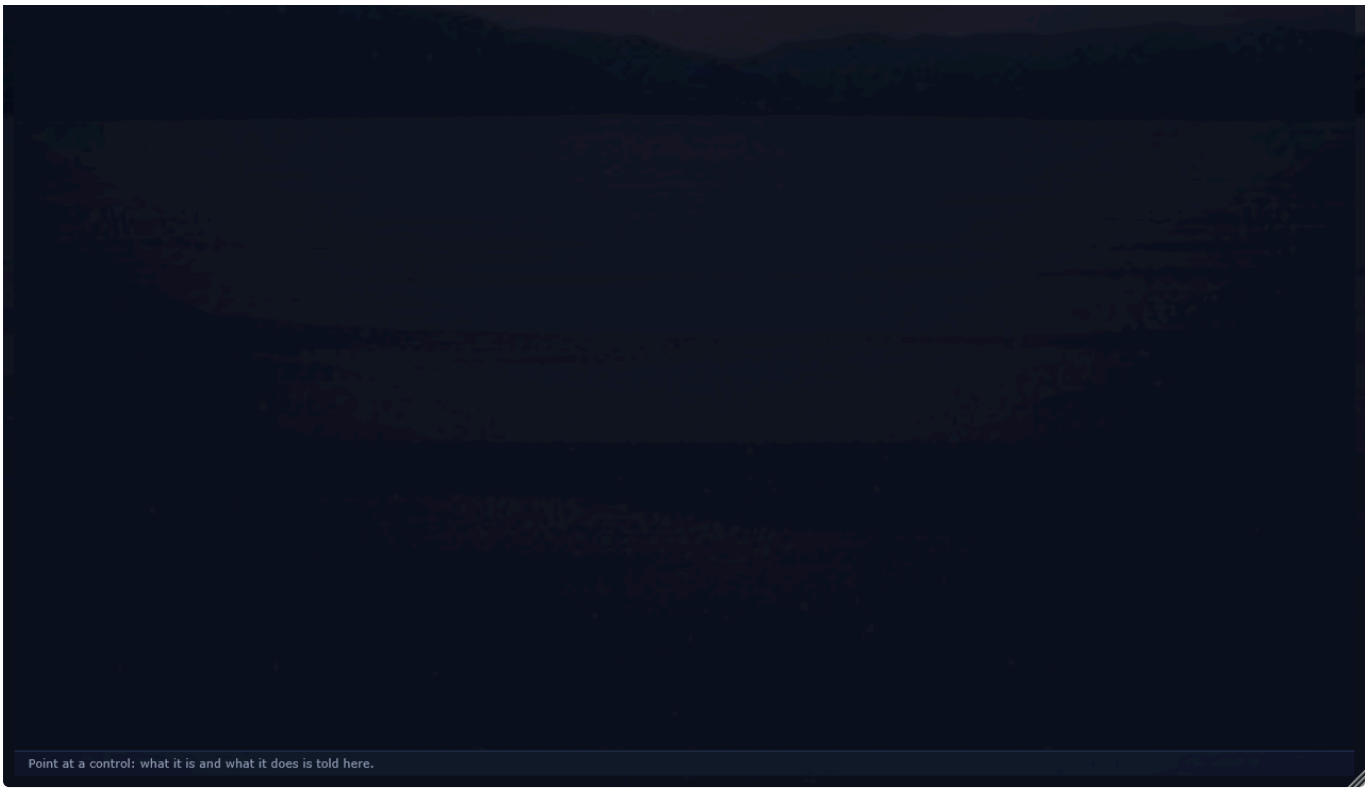

Orchestra: the brass.


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
Strings
Choir
Brass
Timpani
TIMPANI PRESET
Resonant Kettle
this track: Resonant Kettle (Orchestral)
DRUMS
Level
Hardness
Decay
Strike Point
-4.40 dB
1.08
0.80
0.73
OUT
Width
Low Cut
Duck
Room Send
Plate Send
Hall Send
0.50
35.0 Hz
0.00 dB
0.05
0.05
0.40
MOD ENVELOPE
Mod Attack
Mod Decay
Mod Sustain
Mod Release
10.0 ms
800 ms
0.00
400 ms
LFO 1
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
LFO 2
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
LFO 3
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
LFO 4
Rate
Shape
Sync
Retrig
Fade
Sine
Free
1.00 Hz
0.00 s
MATRIX 1-2
Mod 1 Source
Mod 1 Target
Mod 1 Amount
Mod 2 Source
Mod 2 Target
Mod 2 Amount
Off
Off
0.00
Off
Off
0.00
MATRIX 3-4
Mod 3 Source
Mod 3 Target
Mod 3 Amount
Mod 4 Source
Mod 4 Target
Mod 4 Amount
Off
Off
0.00
Off
Off
0.00
MATRIX 5-6
Mod 5 Source
Mod 5 Target
Mod 5 Amount
Mod 6 Source
Mod 6 Target
Mod 6 Amount
Off
Off
0.00
Off
Off
0.00
MATRIX 7-8
Mod 7 Source
Mod 7 Target
Mod 7 Amount
Mod 8 Source
Mod 8 Target
Mod 8 Amount
Off
Off
0.00
Off
Off
0.00

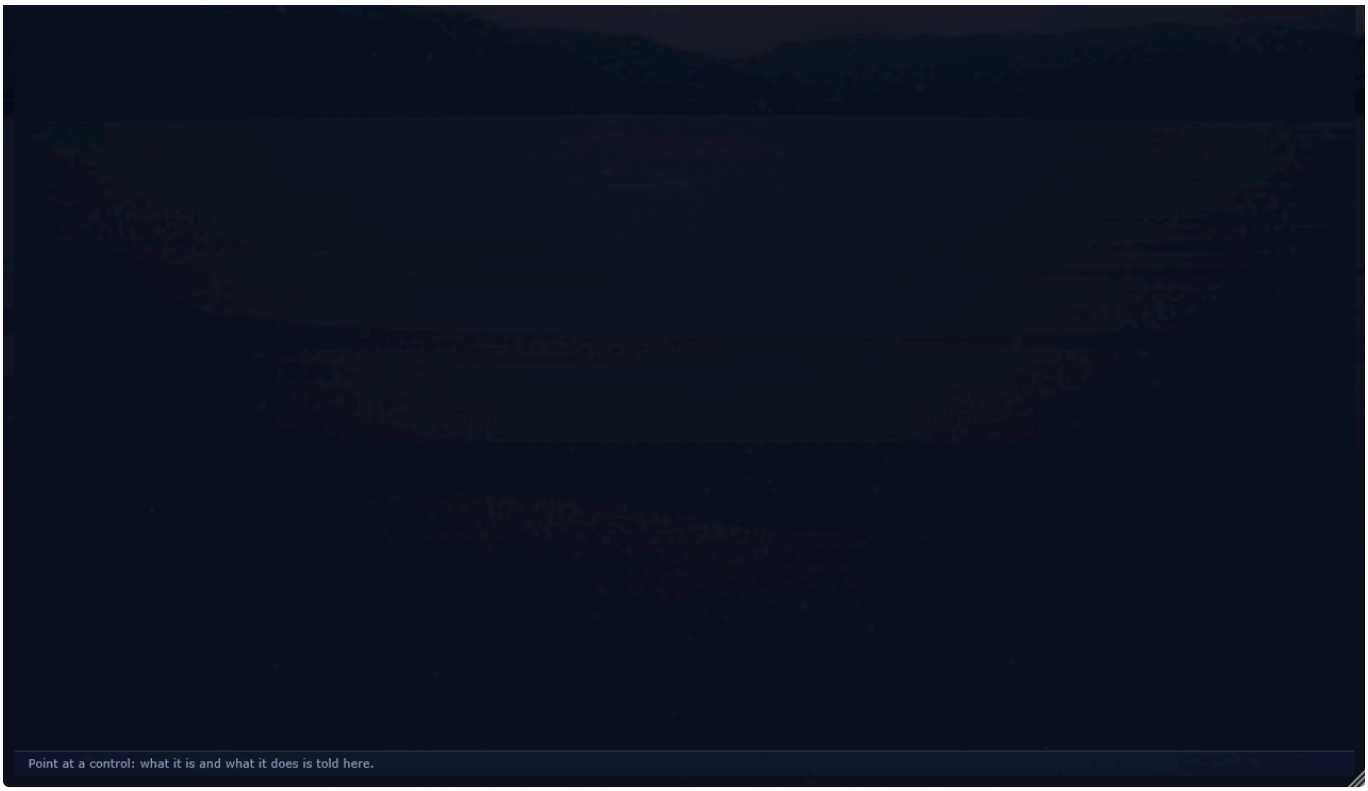

Orchestra: the timpani.

The Cinematic tracks of Uplifting (and some of Dream House and Deep) bring an orchestra, all of it modelled. The strings: six players a note, each a modal string under a bow with the friction of rosin, their own intonation, attack and vibrato, in the body of a violin, viola, cello or double bass by register. The choir: a glottal source with the tension of the voice, five formants per singer on the vowels a, o and u, breath and vibrato. The brass: a lip that buzzes into a bore and its bell, brighter with more breath. The timpani: the modes of a kettle drum under a felt mallet.

The strings enter with the main breakdown's tease and take the melody at its peak; the choir sings at the peak and in the second half of the main drop; at every drop the brass play a braam (the root low, its fifth, the octave) and the timpani strike, after a roll in the two bars before it.

STRINGS

Control	Key	Range	Default
Level	`strings.level`	-36 .. 6 dB	-6 dB
Players	`strings.players`	1 .. 6	6
Vibrato	`strings.vibrato`	0 .. 2	1
Bow Force	`strings.pressure`	0.3 .. 3	1
Bow Position	`strings.position`	-1 .. 1	0
Bow Speed	`strings.speed`	0.3 .. 3	1
Attack	`strings.attack`	5 .. 800 ms	90 ms
Release	`strings.release`	10 .. 1500 ms	180 ms
Width	`strings.width`	0 .. 1	0.55
Low Cut	`strings.low_cut`	20 .. 400 Hz	60 Hz
Duck	`strings.duck`	0 .. 18 dB	3 dB

Room Send	`strings.room_send`	0 .. 1	0.05
Plate Send	`strings.plate_send`	0 .. 1	0.1
Hall Send	`strings.hall_send`	0 .. 1	0.45
Mod Attack	`strings.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`strings.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`strings.menv_sustain`	0 .. 1	0
Mod Release	`strings.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`strings.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`strings.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`strings.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`strings.lfo1_retrig`	off / on	off
LFO 1 Fade	`strings.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`strings.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`strings.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`strings.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`strings.lfo2_retrig`	off / on	off
LFO 2 Fade	`strings.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`strings.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`strings.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`strings.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`strings.lfo3_retrig`	off / on	off
LFO 3 Fade	`strings.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`strings.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`strings.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`strings.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`strings.lfo4_retrig`	off / on	off
LFO 4 Fade	`strings.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`strings.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`strings.mx1_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 1 Amount	`strings.mx1_amount`	-1 .. 1	0
Mod 2 Source	`strings.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`strings.mx2_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 2 Amount	`strings.mx2_amount`	-1 .. 1	0
Mod 3 Source	`strings.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 3 Target	`strings.mx3_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 3 Amount	`strings.mx3_amount`	-1 .. 1	0
Mod 4 Source	`strings.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`strings.mx4_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 4 Amount	`strings.mx4_amount`	-1 .. 1	0
Mod 5 Source	`strings.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`strings.mx5_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 5 Amount	`strings.mx5_amount`	-1 .. 1	0
Mod 6 Source	`strings.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`strings.mx6_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 6 Amount	`strings.mx6_amount`	-1 .. 1	0
Mod 7 Source	`strings.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`strings.mx7_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 7 Amount	`strings.mx7_amount`	-1 .. 1	0
Mod 8 Source	`strings.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`strings.mx8_dst`	Off, Pitch, Bow Pressure, Bow Speed, Bow Position, Vibrato, Vibrato Rate, Level, Pan	Off
Mod 8 Amount	`strings.mx8_amount`	-1 .. 1	0

CHOIR

Control	Key	Range	Default
Level	`choir.level`	-36 .. 6 dB	-6 dB
Singers	`choir.singers`	1 .. 6	6
Vowel	`choir.vowel`	0 .. 1	0
Vibrato	`choir.vibrato`	0 .. 2	1
Breath	`choir.breath`	0 .. 1	0.25
Tension	`choir.tension`	0 .. 1	0.4
Attack	`choir.attack`	5 .. 1500 ms	250 ms

Release	`choir.release`	10 .. 2000 ms	400 ms
Width	`choir.width`	0 .. 1	0.55
Low Cut	`choir.low_cut`	20 .. 400 Hz	90 Hz
Duck	`choir.duck`	0 .. 18 dB	3 dB
Room Send	`choir.room_send`	0 .. 1	0
Plate Send	`choir.plate_send`	0 .. 1	0.1
Hall Send	`choir.hall_send`	0 .. 1	0.55
Mod Attack	`choir.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`choir.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`choir.menv_sustain`	0 .. 1	0
Mod Release	`choir.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`choir.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`choir.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`choir.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`choir.lfo1_retrig`	off / on	off
LFO 1 Fade	`choir.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`choir.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`choir.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`choir.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`choir.lfo2_retrig`	off / on	off
LFO 2 Fade	`choir.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`choir.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`choir.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`choir.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`choir.lfo3_retrig`	off / on	off
LFO 3 Fade	`choir.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`choir.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`choir.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`choir.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`choir.lfo4_retrig`	off / on	off
LFO 4 Fade	`choir.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`choir.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`choir.mx1_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 1 Amount	`choir.mx1_amount`	-1 .. 1	0
Mod 2 Source	`choir.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`choir.mx2_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off

Mod 2 Amount	`choir.mx2_amount`	-1 .. 1	0
Mod 3 Source	`choir.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`choir.mx3_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 3 Amount	`choir.mx3_amount`	-1 .. 1	0
Mod 4 Source	`choir.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`choir.mx4_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 4 Amount	`choir.mx4_amount`	-1 .. 1	0
Mod 5 Source	`choir.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`choir.mx5_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 5 Amount	`choir.mx5_amount`	-1 .. 1	0
Mod 6 Source	`choir.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`choir.mx6_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 6 Amount	`choir.mx6_amount`	-1 .. 1	0
Mod 7 Source	`choir.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`choir.mx7_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 7 Amount	`choir.mx7_amount`	-1 .. 1	0
Mod 8 Source	`choir.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`choir.mx8_dst`	Off, Pitch, Vowel, Tension, Breath, Vibrato, Formant, Level, Pan	Off
Mod 8 Amount	`choir.mx8_amount`	-1 .. 1	0

BRASS

Control	Key	Range	Default
Level	`brass.level`	-36 .. 6 dB	-6 dB
Players	`brass.players`	1 .. 4	3
Pressure	`brass.pressure`	0.3 .. 2	1
Brassiness	`brass.brassiness`	0 .. 1	0.35
Attack	`brass.attack`	5 .. 800 ms	40 ms
Release	`brass.release`	10 .. 1500 ms	150 ms
Vibrato	`brass.vibrato`	0 .. 40 ct	6 ct
Width	`brass.width`	0 .. 1	0.6

Low Cut	`brass.low_cut`	20 .. 400 Hz	50 Hz
Duck	`brass.duck`	0 .. 18 dB	3 dB
Room Send	`brass.room_send`	0 .. 1	0.05
Plate Send	`brass.plate_send`	0 .. 1	0.1
Hall Send	`brass.hall_send`	0 .. 1	0.45
Mod Attack	`brass.menv_attack`	0.1 .. 8000 ms	10 ms
Mod Decay	`brass.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`brass.menv_sustain`	0 .. 1	0
Mod Release	`brass.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`brass.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`brass.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`brass.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`brass.lfo1_retrig`	off / on	off
LFO 1 Fade	`brass.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`brass.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`brass.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`brass.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`brass.lfo2_retrig`	off / on	off
LFO 2 Fade	`brass.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`brass.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`brass.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`brass.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`brass.lfo3_retrig`	off / on	off
LFO 3 Fade	`brass.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`brass.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`brass.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`brass.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`brass.lfo4_retrig`	off / on	off
LFO 4 Fade	`brass.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`brass.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`brass.mx1_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 1 Amount	`brass.mx1_amount`	-1 .. 1	0
Mod 2 Source	`brass.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`brass.mx2_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 2 Amount	`brass.mx2_amount`	-1 .. 1	0
Mod 3 Source	`brass.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off

Mod 3 Target	`brass.mx3_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 3 Amount	`brass.mx3_amount`	-1 .. 1	0
Mod 4 Source	`brass.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`brass.mx4_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 4 Amount	`brass.mx4_amount`	-1 .. 1	0
Mod 5 Source	`brass.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`brass.mx5_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 5 Amount	`brass.mx5_amount`	-1 .. 1	0
Mod 6 Source	`brass.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`brass.mx6_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 6 Amount	`brass.mx6_amount`	-1 .. 1	0
Mod 7 Source	`brass.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`brass.mx7_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 7 Amount	`brass.mx7_amount`	-1 .. 1	0
Mod 8 Source	`brass.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`brass.mx8_dst`	Off, Pitch, Breath, Brassiness, Vibrato, Level, Pan	Off
Mod 8 Amount	`brass.mx8_amount`	-1 .. 1	0

TIMPANI

Control	Key	Range	Default
Level	`timpani.level`	-36 .. 6 dB	-6 dB
Hardness	`timpani.hardness`	0.25 .. 4	1
Decay	`timpani.decay`	0.3 .. 3	1
Strike Point	`timpani.strike`	0.3 .. 0.9	0.68
Width	`timpani.width`	0 .. 1	0.5
Low Cut	`timpani.low_cut`	20 .. 400 Hz	35 Hz
Duck	`timpani.duck`	0 .. 18 dB	0 dB
Room Send	`timpani.room_send`	0 .. 1	0.05
Plate Send	`timpani.plate_send`	0 .. 1	0.05
Hall Send	`timpani.hall_send`	0 .. 1	0.4
Mod Attack	`timpani.menv_attack`	0.1 .. 8000 ms	10 ms

Mod Decay	`timpani.menv_decay`	5 .. 12000 ms	800 ms
Mod Sustain	`timpani.menv_sustain`	0 .. 1	0
Mod Release	`timpani.menv_release`	5 .. 12000 ms	400 ms
LFO 1 Rate	`timpani.lfo1_rate`	0.01 .. 40 Hz	1 Hz
LFO 1 Shape	`timpani.lfo1_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 1 Sync	`timpani.lfo1_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 1 Retrig	`timpani.lfo1_retrig`	off / on	off
LFO 1 Fade	`timpani.lfo1_fade`	0 .. 8 s	0 s
LFO 2 Rate	`timpani.lfo2_rate`	0.01 .. 40 Hz	1 Hz
LFO 2 Shape	`timpani.lfo2_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 2 Sync	`timpani.lfo2_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 2 Retrig	`timpani.lfo2_retrig`	off / on	off
LFO 2 Fade	`timpani.lfo2_fade`	0 .. 8 s	0 s
LFO 3 Rate	`timpani.lfo3_rate`	0.01 .. 40 Hz	1 Hz
LFO 3 Shape	`timpani.lfo3_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 3 Sync	`timpani.lfo3_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 3 Retrig	`timpani.lfo3_retrig`	off / on	off
LFO 3 Fade	`timpani.lfo3_fade`	0 .. 8 s	0 s
LFO 4 Rate	`timpani.lfo4_rate`	0.01 .. 40 Hz	1 Hz
LFO 4 Shape	`timpani.lfo4_shape`	Sine, Triangle, Saw Up, Saw Down, Square, Sample & Hold, Smooth Random	Sine
LFO 4 Sync	`timpani.lfo4_sync`	Free, 4 Bars, 2 Bars, 1 Bar, 1/2, 1/4, 1/8, 1/16, 1/4 T, 1/8 T	Free
LFO 4 Retrig	`timpani.lfo4_retrig`	off / on	off
LFO 4 Fade	`timpani.lfo4_fade`	0 .. 8 s	0 s
Mod 1 Source	`timpani.mx1_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 1 Target	`timpani.mx1_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 1 Amount	`timpani.mx1_amount`	-1 .. 1	0
Mod 2 Source	`timpani.mx2_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 2 Target	`timpani.mx2_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 2 Amount	`timpani.mx2_amount`	-1 .. 1	0
Mod 3 Source	`timpani.mx3_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 3 Target	`timpani.mx3_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 3 Amount	`timpani.mx3_amount`	-1 .. 1	0
Mod 4 Source	`timpani.mx4_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 4 Target	`timpani.mx4_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off

Mod 4 Amount	`timpani.mx4_amount`	-1 .. 1	0
Mod 5 Source	`timpani.mx5_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 5 Target	`timpani.mx5_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 5 Amount	`timpani.mx5_amount`	-1 .. 1	0
Mod 6 Source	`timpani.mx6_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 6 Target	`timpani.mx6_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 6 Amount	`timpani.mx6_amount`	-1 .. 1	0
Mod 7 Source	`timpani.mx7_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 7 Target	`timpani.mx7_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 7 Amount	`timpani.mx7_amount`	-1 .. 1	0
Mod 8 Source	`timpani.mx8_src`	Off, LFO 1, LFO 2, LFO 3, LFO 4, Mod Env, Filter Env, Velocity, Key, Random, Wheel, Pressure, Energy	Off
Mod 8 Target	`timpani.mx8_dst`	Off, Pitch, Hardness, Strike, Decay, Level, Pan	Off
Mod 8 Amount	`timpani.mx8_amount`	-1 .. 1	0

Effects


PARHELION
Uplifting
A
Phrygian
Track
DJ mix
Length
8.0 min
Compose track
seed 4242 single track, Uplifting Anthem, 137.5 BPM, A Phrygian (8A), 7.4 min, levelling
nothing rerolled
Intro
Groove
Break
Drop
Breakdown
Build
Drop
Outro
Set
Arrange
Low End
Drums
Synths
Keys
Orchestra
Effects
Mixer
Perform
Export
Style
SFX
Sends
SFX PRESET
Smooth Scintilla
this track: Smooth Scintilla (Bright Trance FX)
EFFECTS
Level
Noise
Resonance
Brightness
Vowel
Width
-2.90 dB
0.68
0.55
0.77
0.05
0.74
SHAPES
Impact Decay
Swell Decay
Sub Drop
Sub Duck
Wander
Wander Send
2000 ms
2500 ms
-18.7 dB
1.00
0.85
FAMILIES
Riser
Downlifter
Impact
Sweep
Formant Shot
Reverse Swell
Zap
Squelch
Bubble
Reverse Crash
Atmosphere
181
0
0
185
0
0
0
0
0
0
0
SENDS
Room Send
Plate Send
Hall Send
Duck
0.00
0.10
0.35
2.00 dB
Point at a control: what it is and what it does is told here.



Effects: the sends.

The effects are synthesised as well: the riser and the sweep of the build, the reverse crash and the impact on the drop, the downlifter after it, the sub drop, swells, zaps and atmospheres, each from its own group of presets.

The sends: a room, a plate and a long hall, which every voice sends into by its own knobs (the hats into the room and the percussion into the plate by the knobs here), each with a low cut at its input and its return ducked by the pump. The composer draws the hall long in a breakdown and short in a drop.

SFX

Control	Key	Range	Default
Level	`sfx.level`	-36 .. 6 dB	-3 dB
Noise	`sfx.noise`	0 .. 1	0.6
Resonance	`sfx.resonance`	0 .. 1	0.5
Brightness	`sfx.brightness`	0 .. 1	0.5
Impact Decay	`sfx.impact_decay`	200 .. 4000 ms	1400 ms
Vowel	`sfx.vowel`	0 .. 1	0.3
Swell Decay	`sfx.swell_decay`	200 .. 6000 ms	1500 ms
Width	`sfx.width`	0 .. 1	0.7

Room Send	`sfx.room_send`	0 .. 1	0
Hall Send	`sfx.hall_send`	0 .. 1	0.35
Duck	`sfx.duck`	0 .. 18 dB	2 dB
Sub Drop	`sfx.sub_level`	-36 .. 6 dB	-14 dB
Sub Duck	`sfx.sub_duck`	0 .. 1	1
Wander	`sfx.wander`	off / on	off
Wander Send	`sfx.wander_send`	0 .. 1	0.85
Riser	`sfx.preset_riser`	0 .. 256	0
Downlifter	`sfx.preset_downlifter`	0 .. 128	0
Impact	`sfx.preset_impact`	0 .. 128	0
Sweep	`sfx.preset_sweep`	0 .. 256	0
Formant Shot	`sfx.preset_formant_shot`	0 .. 96	0
Reverse Swell	`sfx.preset_reverse_swell`	0 .. 256	0
Zap	`sfx.preset_zap`	0 .. 96	0
Squelch	`sfx.preset_squelch`	0 .. 128	0
Bubble	`sfx.preset_bubble`	0 .. 64	0
Reverse Crash	`sfx.preset_reverse_crash`	0 .. 128	0
Atmosphere	`sfx.preset_atmosphere`	0 .. 512	0
Plate Send	`sfx.plate_send`	0 .. 1	0.1

SENDS

Control	Key	Range	Default
Room Size	`sends.room_size`	0.3 .. 3	0.7
Room Decay	`sends.room_decay`	0.2 .. 4 s	1 s
Room Return	`sends.room_return`	-60 .. 18 dB	6 dB
Plate Decay	`sends.plate_decay`	0.3 .. 6 s	1.5 s
Plate Damping	`sends.plate_damping`	0 .. 1	0.4
Plate Pre-Delay	`sends.plate_predelay`	0 .. 100 ms	20 ms
Plate Return	`sends.plate_return`	-60 .. 18 dB	0 dB
Hall Size	`sends.hall_size`	0.5 .. 3	2.2
Hall Decay	`sends.hall_decay`	0.5 .. 14 s	6 s
Hall Damping	`sends.hall_damping`	0 .. 1	0.45
Hall Pre-Delay	`sends.hall_predelay`	0 .. 120 ms	60 ms
Hall Return	`sends.hall_return`	-60 .. 18 dB	0 dB
Send Low Cut	`sends.low_cut`	80 .. 800 Hz	280 Hz
Return High Cut	`sends.high_cut`	2000 .. 18000 Hz	9000 Hz
Hats to Room	`sends.hats_send`	0 .. 1	0.15
Perc to Plate	`sends.perc_send`	0 .. 1	0.2

Mixer and Master





The Mixer tab's second page: the buses and the master.



The Mixer tab's third page: the decks.

The Mixer tab has three pages. Console: a channel strip per part -- the kick, the bass, the drums, every synth, the keys, the orchestra, the effects -- with its level, its mute, its sound and its meter, and the output with its loudness at the end (a narrow window scrolls the console sideways). Buses and Master: the parameters below. Decks: the DJ mixer's channels.

The meters: each deck after its mixer channel, the output, and the loudness of the last 400 ms. Under them the mix buses (the Drums chapter), the pump (the Low End chapter) and the master: the glue compressor, a tilt of the highs against the lows, the side under Mono Below made mono, the level, a clipper at four times the rate and a true-peak limiter at the ceiling.

A deck's channel is a DJ mixer's: the fader, a three-band isolator (200 Hz and 2.5 kHz, each band from a kill to +6 dB), a filter that is a low pass to the left and a high pass to the right, and the send into the mixer's effects. In a set the composer moves them as a DJ would; in the plugin they are yours too.

MASTER

Control	Key	Range	Default
Level	`master.level`	-24 .. 12 dB	0 dB
Glue Threshold	`master.threshold`	-40 .. 0 dB	-12 dB
Glue Ratio	`master.ratio`	1 .. 10	1.5
Clip Drive	`master.clip`	0 .. 9 dB	2 dB
Ceiling	`master.ceiling`	-6 .. 0 dBTP	-1 dBTP

Mono Below	`master.mono_below`	40 .. 250 Hz	120 Hz
Tilt	`master.tilt`	-12 .. 12 dB	1.5 dB

DECK (3 INSTANCES)

Control	Key	Range	Default
Fader	`deckN.fader`	-60 .. 6 dB	0 dB
Low	`deckN.low`	-60 .. 6 dB	0 dB
Mid	`deckN.mid`	-60 .. 6 dB	0 dB
High	`deckN.high`	-60 .. 6 dB	0 dB
Filter	`deckN.filter`	-1 .. 1	0
FX Send	`deckN.fx_send`	0 .. 1	0

Perform



As at a mixer. Seven mutes -- kick, bass, hats, percussion, lead, the other synths, pads --: a muted group's notes stop and its tails ring out. The master filter takes the whole mix, the echo throw sends it into the mixer's echo, and the mod wheel drives every voice's modulation matrix where its preset listens to it. Each deck has its kills and its fader.

Breakdown now and Drop now rewrite the playing track from its next 8-bar line (or the one after it, where that is less than six seconds away): into a breakdown with its build and a drop after it, or into the drop at once, after a beat of silence. Everything before that line stays as it was, and the track plays on without a gap. A second one keeps the first: the track is rewritten from both lines. A set is not rewritten -- its next blend would have to move with it.

Every control can be learned from a MIDI controller: click learn, move the controller (a right click forgets it). By default controller 74 moves the filter, controller 11 the throw and the mod wheel the wheel; channel pressure is the matrices' pressure; the keys from middle C up (C to F#) toggle the seven mutes. The bindings are saved with the project. Controllers 74 and 11 are the same in every generator of the family; while a headset sends its hands, a box beside the mutes shows what they do (The panel).

The keyboard (the Keyboard group): Keyboard Plays sends the keys of a MIDI keyboard to a voice instead of the mutes -- the kit (C1 the kick, C#1 to C2 the twelve lanes), the bass, the 303, the lead, counter, pluck, arp, pad or stab, the piano, the strings, the choir, the brass, or by channel (1 kit, 2 bass, 3 303, 4 to 9 lead to stab, 10 kit, 11 piano, 12 strings, 13 choir, 14 brass) -- with the sound its page has, past the mutes. Replace leaves that voice's generated notes out, Layer plays over them; Composer off leaves every generated note out, and

only what is played sounds, through the mix and the effects as composed. The keys play while the music runs, each on its sample; an export plays what was composed.

Three options of the Keyboard group, each off until you choose it: Lower Keys Play splits the keyboard -- the keys below Split At (C1 to C5, C3 to begin with) play the voice chosen there, the keys from it upwards the voice of Keyboard Plays; Scale Lock moves a key outside the track's key to the nearest note inside it, so no wrong note can sound; Velocity Curve shapes the touch -- As Played, Soft (a light touch is enough), Hard (it takes a firm one) or Fixed (every note at 100, for pads that send no velocity). A key's release always ends the note its press started, even when an option changed while it was held.

The perform controls are live only: an export or parh_render plays the track as it was composed.

PERFORM

Control	Key	Range	Default
Master Filter	`perform.filter`	-1 .. 1	0
Echo Throw	`perform.throw`	0 .. 1	0
Mute Kick	`perform.mute_kick`	off / on	off
Mute Bass	`perform.mute_bass`	off / on	off
Mute Hats	`perform.mute_hats`	off / on	off
Mute Perc	`perform.mute_perc`	off / on	off
Mute Lead	`perform.mute_lead`	off / on	off
Mute Synths	`perform.mute_synths`	off / on	off
Mute Pads	`perform.mute_pads`	off / on	off
Mod Wheel	`perform.wheel`	0 .. 1	0
Pressure	`perform.pressure`	0 .. 1	0
Keyboard Plays	`perform.keyboard_part`	Off, Kit, Bass, 303, Lead, Counter, Pluck, Arp, Pad, Stab, Piano, Strings, Choir, Brass, By channel	Off
Keyboard Mode	`perform.keyboard_mode`	Replace, Layer	Replace
Composer	`perform.composer`	off / on	on
Lower Keys Play	`perform.keyboard_lower`	Off, Kit, Bass, 303, Lead, Counter, Pluck, Arp, Pad, Stab, Piano, Strings, Choir, Brass	Off
Split At	`perform.keyboard_split`	C1, C2, C3, C4, C5	C3
Scale Lock	`perform.keyboard_scale`	off / on	off
Velocity Curve	`perform.keyboard_velocity`	As Played, Soft, Hard, Fixed	As Played

Export and cues



The export renders what plays at 48 kHz: a 24-bit WAV with cue markers (the bass's entry, the breakdowns, the drops, the main drop, the outro; in a set every track and its bass swap) and the same cues as JSON beside it (<name>.wav.cues.json), for DJ software that does not read the WAV's markers, and a rekordbox collection beside it (<name>.wav.rekordbox.xml: the beat grid, following a set's tempo bar by bar, every cue a memory cue and the first eight hot cues; import it in rekordbox under Preferences > Advanced > rekordbox xml); the MIDI file with the tempo map, a channel per part and each voice's preset as its name and program change; on request the stems -- a WAV per part -- and the DJ loops of a track: eight seamless bars each of its intro, its main drop and its outro. A .parhset file holds the seed, the lengths, the rerolls and every changed knob.

The OSC cues tell a visualiser what the score knows, at the moment it is heard: the beat and the tempo, the bar, the section's name, what the layer matrix changes, the key. They go to this machine at the port given, or to PARH_CUE_HOST.

```
/parh/beat i f      beat number, tempo
/parh/bar i         bar number
/parh/block s       the section's name ("Breakdown", "Drop", a set's track)
/parh/op s          the layer matrix's change ("add lead", "filter pluck", "remove kick")
/parh/key s         the key as a Camelot label ("8A")
```

CUE

Control	Key	Range	Default
OSC Cues	`cue.enabled`	off / on	off

OSC Port	`cue.port`	1024 .. 65535	9000

Style



Where the knobs' profile stands among the five styles, on six axes: the tempo, the density of the drums, how much the lead carries, the share of the breakdowns, the length of the breakdown's reverb and the brightness of the palette the composer chooses its presets from. The markers are the five profiles; the bar is the profile of the knobs, with its morph. Under them the references' medians per style, as they were measured: tempo, length, integrated loudness and the loudest 20 seconds, the loudness range, the breakdown's share and its distance to the drop, the rise into the drop, the spectral centroid and the width above 200 Hz.

With a DAW and other apps

Four things connect Parhelion to the software around it and to the rest of the family (02.10.2026). The outputs, Link and the jam are off until they are wanted, the MIDI goes nowhere until a track takes it, and only the jam -- as a follower -- changes what the music sounds like.

MIDI out: in a DAW the plugin also sends what it plays -- every note of every part at the moment it sounds, a channel per part as in the MIDI file of an export -- and leaves the muted parts out. Record it on a MIDI track to keep a part as notes, or route it to another instrument to double it. A stop or a jump of the transport sends all notes off.

Outputs of their own: besides the main output the plugin has a stereo output for each of the stems -- the kick, the sub, the bass, the 303, the hats, the percussion, the lead, the counter, the pluck, the arp, the pad, the stab, the piano, the strings, the choir, the brass, the timpani, the room, the plate, the hall, the cloud, the effects and the DJ effects. They are off to begin with; switched on in the DAW (in most hosts: the plugin's output configuration, or its multi-output version), each carries its part before the master, while the main output plays on as before.

Ableton Link (the standalone; Settings > Ableton Link): with another Link app on the network -- Live, Bitwig, a phone app, another generator of the family -- Parhelion takes the session's tempo, lines its bars up with the session's and starts and stops with it; alone in a session it offers its own tempo to whoever joins. In a DAW the host's transport leads, as before.

The family jam (Settings > Family jam, in the plugin and in the standalone; off to begin with): the five instruments of the family -- Totality, Parhelion, Ephemeris, Phosphene and Noctuary -- play as one band on the local network. One leads: its key, the energy of its sections, its breaks and its drops go out to the others. Those set to Follow take them up -- in Parhelion: every melodic part -- the sub, the bass, the 303, the lead, the counter, the pluck, the arp, the pad, the stab, the piano, the strings, the choir, the brass and the timpani -- moves to the leader's key while the drums play as written; its filter closes a little with a quiet section of the leader's (while the Perform filter stands in the middle); and in the leader's breaks the kick, the sub, the bass and the 303 are out until its drop. A new root comes in at the follower's next bar line, by the shortest way, the mode with its next track. Tempo and bars come from Ableton Link in the standalone (switch it on in each of them) or from the DAW's transport, so that a section the leader announces lands on the same bar everywhere. As the leader Parhelion says its track's key and, a beat ahead, each of its sections -- the intro, the breakdowns, the drops, the outro --, with its energy. The jam stays on this network (UDP multicast to 239.255.77.77, port 9177, not past the router), instruments on one machine find each other as well, and a follower that has not heard its leader for four seconds goes back to its own key and its own form. The last line of the submenu says what it does: off, leading, or whom it follows.

On a Mac: every release has a build for Apple Silicon (macOS 12 or newer), the standalone, the VST3 and the Audio Unit (Logic, GarageBand, MainStage; passed by Apple's auval), built and tested on GitHub's machines. It is signed ad hoc, not notarized: macOS asks once (README-macOS.txt in the zip says how), and it has not yet been played on a real Mac -- reports are welcome.

On Linux: every release has an archive for x86-64 (glibc 2.35 or newer: Ubuntu 22.04, Debian 12, Fedora 36 and later) with the standalone, the VST3, the LV2 (Ardour, Carla, Reaper, Qtractor) and the renderer, built and tested on GitHub's Ubuntu machines and tried under WSL. README-Linux.txt in it says where everything goes:

the VST3 into ~/.vst3, the LV2 into ~/.lv2, the standalone started where it lies, sound through ALSA or JACK (PipeWire serves both).

Demos: the release "demos" holds a track per style as an MP3 and one of them as a video, with pictures by KaleidoscopeEnhanced cut to the track's own score cues; Tools/demo/make_demos.py makes them all again (parh_render).

KaleidoscopeEnhanced understands the score cues of all five instruments as they come (since 02.10.2026) -- Totality's blocks and keys, Parhelion's sections, Ephemeris' phases, Phosphene's sections and drops, Noctuary's bars, keys and scenes -- and cuts its pictures to them, on a drop at once.

Meta Quest

The whole generator runs on the headset (bin\quest\ParhelionQuest.apk, see Quest/README.md). The hands are the hands at the mixer: left pinch play and stop, right pinch kick out and in, the right pinch held Breakdown now or Drop now (handed over on a beat, without a gap: a second engine takes over from the first), both hands together the next track; the left hand's height the master filter, the right's the echo throw -- the grammar of every generator's headset (The panel). Above and ahead of the player the parhelion hangs in the sky at the size of a room: the sun swells with the kick, the halo is the bar with the parts' notes on it, the sun dogs burn with the track's energy, and the line through them is the track with its sections. A file parh.cfg in the app's folder sets the seed, the style, a set's length and any knob; bridge_host (and bridge_port, 9104) send the hands to Parhelion on a computer instead, which then plays with them as with its own; audio=0 leaves the headset silent. The headset's quality plays fewer unison oscillators, voices and players and solves the filter models more lightly.

The command line

parh_render composes and renders without a window, the same samples the plugin plays:

```
parh_render --seed 7 --out track.wav --midi track.mid --stems stems --loops loops
parh_render --style Acid --seed 3 --minutes 7 --out acid.wav --plan-json acid.json
parh_render --dj 120 --seed 7 --set "set.dramaturgy=Sunrise; set.journey=Wander" --out set.wav
parh_render --seed 7 --reroll motif --out other_hook.wav
parh_render --list                  every parameter with its value
parh_render --bench --quality quest how fast, at the headset's quality
```

Tools/calibrate.py renders every style and measures its tracks exactly as the references were measured; the evaluation (Tools/eval_report.py) adds the section boundaries it hears against the planned ones, the key it hears against the planned one, and the rise into each drop.