


Synergy Telecom P Ltd.

8 Bands Handheld Panel Antenna

Frequency	CH1	428-438 MHz
	CH2	860-930 MHz
	CH3	1160-1280 MHz
	CH4	1400-1480 MHz
	CH5	1570-1680 MHz
	CH6	2400-2500 MHz
	CH7	5150-5350 MHz
	CH8	5725-5850 MHz
Gain	15-20dBi	
Input Impedance	50Ω	
VSWR	≤1.5	
Size	390*390*50mm	
Connector	N Female or Customized	
Weight	≤2.9Kg	
Radome Color	Black	
Operational Humidity	10-95	

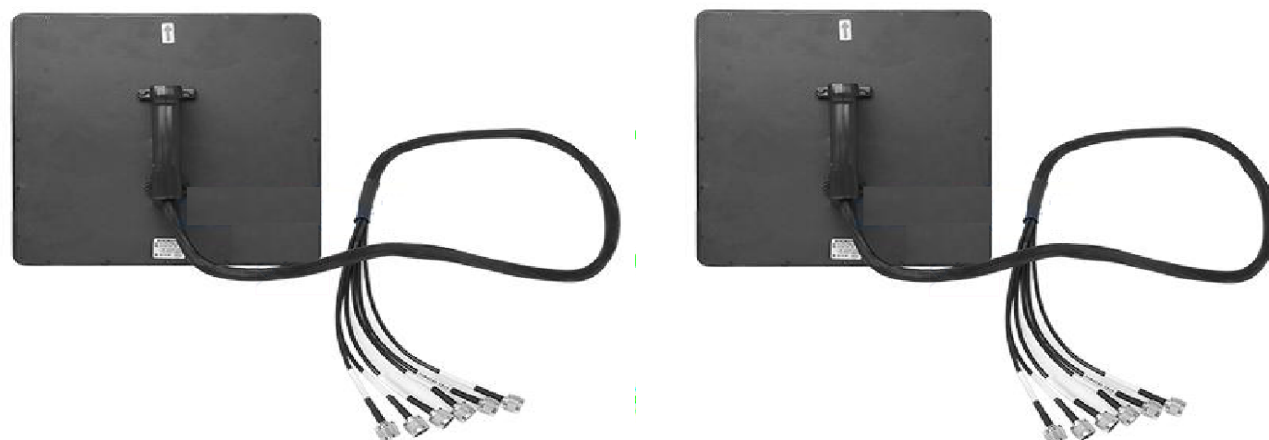

WZ-47 BUDHELLA VILLAGE ,VIKASPURI NEW DELHI-110018
Phone: 011-28533349, Mob: 9810138894/9212558066, Fax: 011-28533349
Email:- info@rfconnector.in, Website:- www.rfconnector.in