



Technical Data

## STK SERIES CONNECTOR



www.rfconnector.in



Nomenclature: CON RF50 SMA RP F TAB ST FMT


Page No.

1 of 1

STK-571184001253

CON RF50 SMA RP F TAB ST FMT

### OUTLINE DRAWING

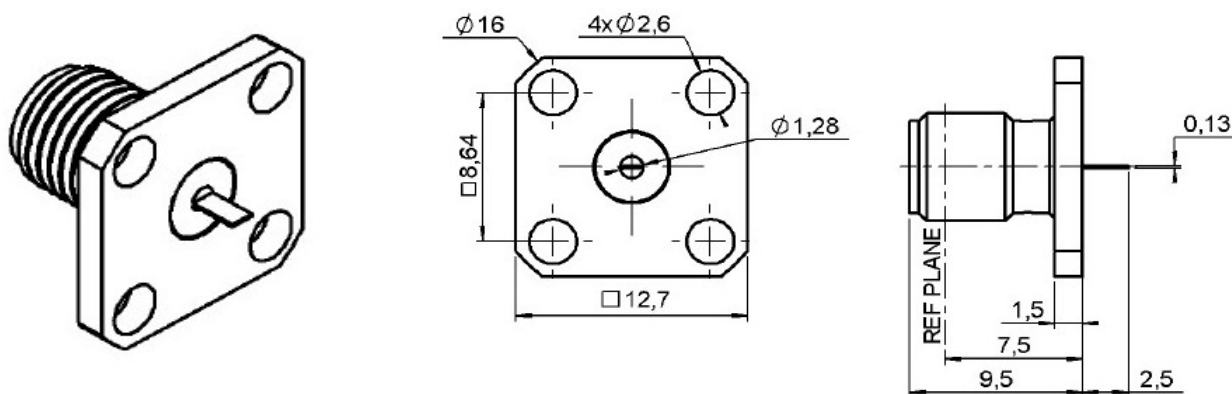

### TECHNICAL DATA

#### ELECTRICAL DATA

|                                  |                                      |
|----------------------------------|--------------------------------------|
| Impedance                        | 50 $\Omega$                          |
| Frequency                        | 0-18 GHz                             |
| VSWR                             | 1.06 + 0.002 x F(GHz) Maxi           |
| Insertion loss                   | 0.07* $\sqrt{F(\text{GHz})}$ dB Maxi |
| RF leakage                       | - ( 60 - F(GHz)) dB Maxi             |
| Voltage rating                   | 500 Veff Maxi                        |
| Dielectric with standing voltage | 1000 Veff mini                       |
| Insulation resistance            | 5000 M $\Omega$ mini                 |

#### MECHANICAL INFORMATION

|                            |                 |
|----------------------------|-----------------|
| Axial force – Mating end   | 27 N mini       |
| Axial force – Opposite end | 27 N mini       |
| Torque                     | 2.8 N.cm mini   |
| Mating                     | NA N.cm         |
| Panel nut                  | NA N.cm         |
| Mating life                | 500 Cycles mini |
| Weight                     | 2.550 g         |

#### ENVIRONMENTAL

|                       |              |  |
|-----------------------|--------------|--|
| Operating temperature | -65/+165 ° C |  |
| Hermetic seal         | NA Atm.cm3/s |  |
| Panel leakage         | NA           |  |

DIMENSIONS

| COMPONENTS     | MATERIALS        | PLATINGS (mm)          |  |
|----------------|------------------|------------------------|--|
| BODY           | STAINLESS STEEL  | PASSIVATED             |  |
| CENTER CONTACT | BERYLLIUM COPPER | GOLD 0.5 OVER NICKEL 2 |  |
| OUTER CONTACT  | -                | GOLD 1.3 OVER NICKEL 2 |  |
| INSULATOR      | PTFE             | -                      |  |
| GASKET         | -                | -                      |  |
| OTHERS PARTS   | -                | -                      |  |

| Originated                                                                               | Date     | Approved      | Date | Rev | Amend | Name | Date | <br><b>Synergy Telecom Pvt Ltd</b><br><small>Defence &amp; Aerospace Division</small> |
|------------------------------------------------------------------------------------------|----------|---------------|------|-----|-------|------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sang                                                                                     | 01.11.25 | Krishnamurthy | -    | 0   | -     | -    | -    |                                                                                                                                                                          |
| Synergy Telecom P Ltd,<br>WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India |          |               |      | -   | -     | -    | -    |                                                                                                                                                                          |
|                                                                                          |          |               |      | -   | -     | -    | -    | Email: sales.blr@rfconnector.in                                                                                                                                          |

This document is the property of **Synergy Telecom P Ltd**- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from **Defense & Aerospace division**. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand.

[www.rfconnector.in](http://www.rfconnector.in)