Technical Data

# STK SERIES CONNECTOR

www.rfconnector.in

QUALITY PRODUCT of INDIA

## Nomenclature: BULKHEAD JACK



| STK-5711- F26-RF400-OG-CI | BULKHEAD JACK |
|---|---|

**OUTLINE DRAWING**

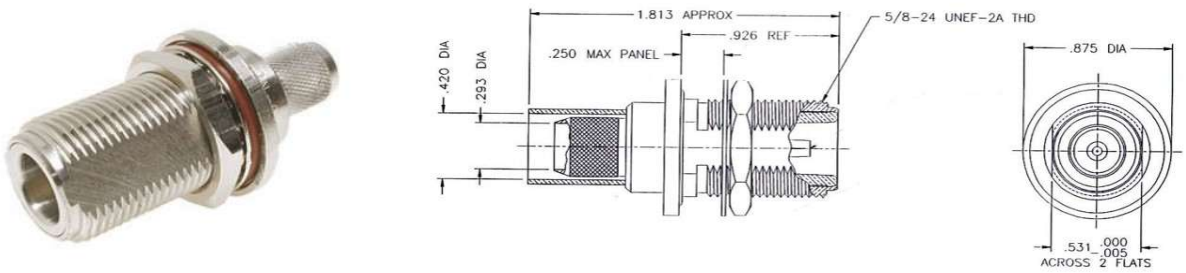


TECHNICAL DATA

## ELECTRICAL DATA

| | |
|---|---|
| Impendance | 50 Ω |
| Frequency range | DC-6Ghz |
| Working voltage | 1000vrms |
| VSWR | 2Ghz |
| Insertion loss | 0.15xFghz |

## MATERIAL INFORMATION

| COMPONENTS | MATERIALS | PLATINGS (mm) |
|---|---|---|
| Center contact | Beryllium Copper | Gold |
| Outer conductor | Brass | Nickel |
| Body | Brass | Nickel |
| Crimp sleeve | - | Nickel |
| Dielectric | - | - |
| Gasket | Silicon | - |

## ENVIRONMENTAL INFORMATION

| | |
|---|---|
| Temperature range | -55°c~+155°c |
| Weather standard | IEC 60068 55/155/56 |

## MECHANICAL INFORMATION

| | |
|---|---|
| Torsion | - |
| Tensil force | - |

| Originated | Date | Approved | Date | Rev | Amend | Name | Date |
|---|---|---|---|---|---|---|---|
| Sang | 01.11.25 | Krishnamurthy | - | 0 | - | - | - |
| Synergy Telecom P Ltd, | | | | - | - | - | - |
| WZ-47, Bodella Village, Vikas Puri, New Delhi - 110 018, India | | | | - | - | - | - |

Synergy Telecom Pvt Ltd
Defence & Aerospace Division

Email: sales.blr@rfconnector.in

This document is the property of Synergy Telecom P Ltd- New Delhi and contain confidential information this document shall not be used, reproduce or disclosure in whole or in part, without prior written permission from Defense & Aerospace division. This document and al it copies shall be returned to Synergy Telecom P Ltd on demand. www.rfconnector.in